



(1)

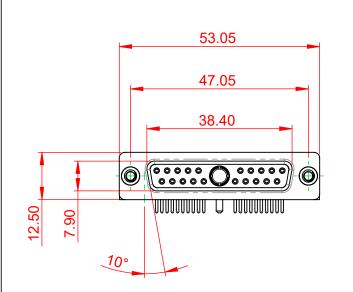



NOTES:


MATERIAL: HOUSING: SHELL: CONTACT:

.XX

±0.13

.XXX ±0.05


THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED




OPERATING TEMPERATURE:

POWER/CO-AX CONTACT RATING: 10A (CURRENT) (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX.

INSULATOR RESISTANCE: DIELECTRIC WITHSTANDING VOLTAGE:



SW REFERENCE NO .: 630 COMBO ASSEMBLY COMBINATION D-SUB DRAWN: C.B DATE: JAN. 01/2019 CHECKED: DATE: THESE DRAWINGS AND SPECIFICATIONS OF 2 SCALE: (IN C.A.D. 1:1) SHEET 1 EDAC INC ARE THE PROPERTY OF EDAC INC., AND TORONTO, ONTARIO SHALL NOT BE REPRODUCED, OR COPIED 630-21W1240-1T4 ISSUE DRAWING NUMBER: OR USED AS THE BASIS FOR THE CANADA MANUFACTURE OR SALE OF APPARATUS 1 PART NUMBER: 630-21W1240-1T4 WITHOUT WRITTEN PERMISSION.



COMPLIANT

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.



5000MΩ min.

1000V AC rms

-55°C ~ 125°C

