


| MATERIAL AND FINISH AS BELOW | |
|------------------------------|------------------------------------------------------------------------------------|
| A | Housing LCP UL94V-0 Black |
| B | Contact Phosphor Bronze C5210,Gold Flash |
| C | Shell Stainless Steel SUS304,Nickel Plating Gold Flash Plating on Solder Tail |

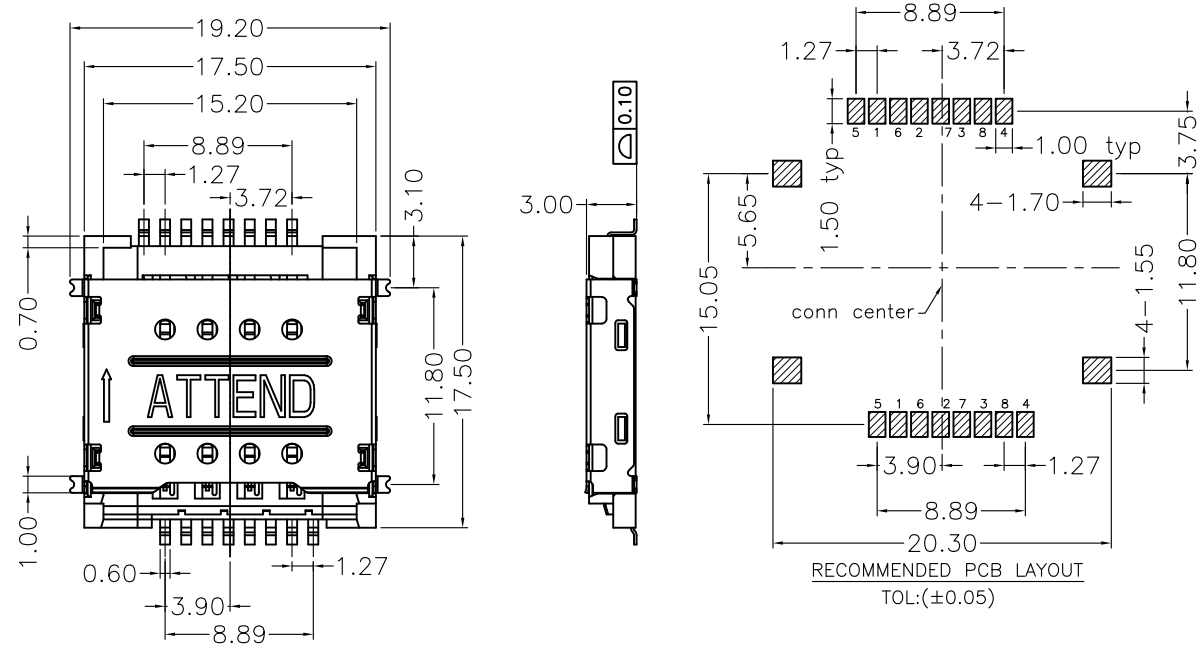




SPECIFICATION:

- 1. ELECTRICAL**
- 1.1 Current Rating: 0.5A per pin
 - 1.2 Voltage Rating: 30V AC/DC
 - 1.3 Contact Resistance: 60mΩ Max
 - 1.4 Insulation Resistance: 500MΩ
 - 1.5 Dielectric Withstanding Voltage: 500VAC

- 2. MECHANICAL**
- 2.1 Durability: 5000 Cycle

- 3. ENVIRONMENTAL**
- 3.1 Operating temperature range: -40°C~+85°C
 - 3.2 Storage temperature range: -40°C~+85°C

- 4. SOLDER ABILITY**
- 4.1 Recommended IR Reflow Temperature: 260°C 10sec

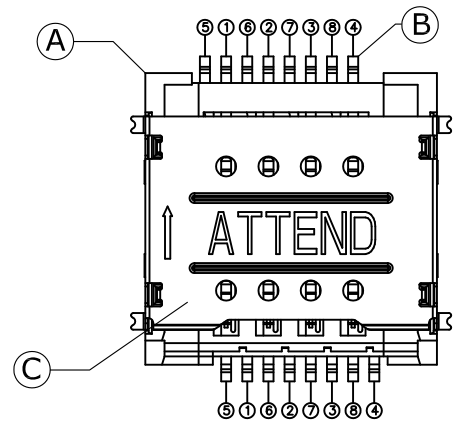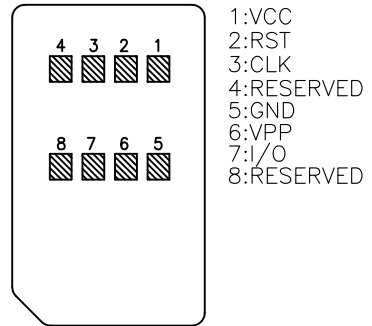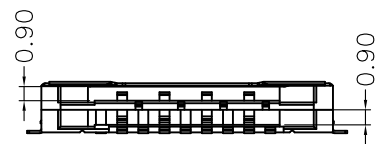

| | | |
|------------------------------------------------------------|------------------------------|-------------------------|
| ⚠ | Revised Voltage Rating SPEC. | 2014/11/25 |
| ⚠ | Revised to New Drawing Frame | 2012/10/22 |
| REV. | DESCRIPTION | DATE |
| UNLESS OTHERWISE SPECIFIED TOLERANCE | | |
| ANGLES | ANG. | ±5° |
| LINEAR | 0. | ±0.3 |
| | 0.0 | ±0.25 |
| | 0.00 | ±0.20 |
| SCALE | AS SHOWN | UNIT: mm |
| DRAWN | Fros | 2014/11/25 |
| CHECKED | Ron | 2014/11/25 |
| APPROVED | Ken | 2014/11/25 |
| DRAWN NAME: SIM Card Socket Dual Port Push-Pull Type | | PRODUCT NO. 115H-BA00 |
| SIZE A4 | SHEET 1/1 | FILE NAME 115H-BA00_B_8 |



www.attend.com.tw