
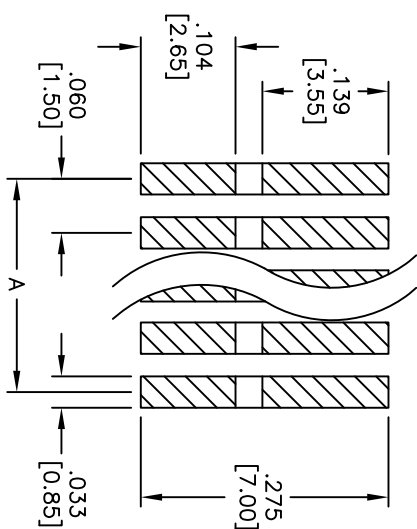
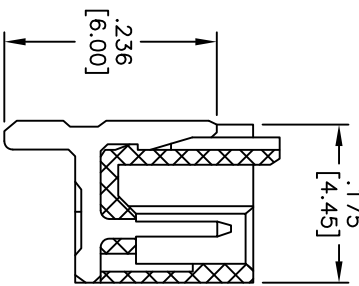
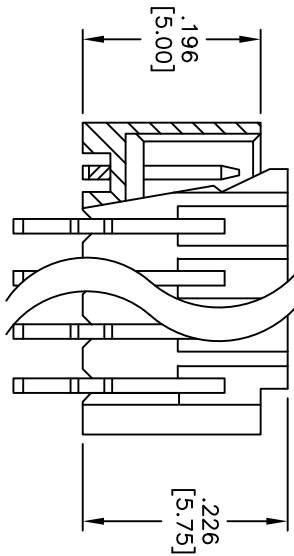


Rev	AWO #	Description	Date	Appr
-		RELEASED	2/22/12	

APPROVED: _____
 DATE: _____ TITLE: _____



PACKAGED ON TAPE & REEL

Positions: 02 thru 15
 A=.059 [1.50] X No. of (Positions -1)
 B=.059 [1.50] X No. of (Positions -1) + .110 [2.80]

SPECIFICATIONS:

Material:
 Insulator: Hi-temp thermoplastic, rated UL 94V-0
 Insulator color: Natural
 Contacts: Brass
Plating:
 Tin over Nickel underplate overall
Electrical:
 Operating voltage: 350 V AC/DC
 Current rating: 3 V AC/DC
 Contact resistance: 20 mohms max
 Insulation resistance: 1000 Mohms min
 Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
 Operating temperature: -25°C to +85°C
 Environmental:
 Lead free, RoHS compliant.

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES Holes ±.10
 .XX ±.020 ØXX ±.015
 .XXX ±.015 ØXXX ±.010
 APPROVALS DATE

ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: MX1.5mm WAFER 90°, SURFACE MOUNT
 2 THRU 15 POSITIONS

DRAWN	AY	2/22/12	SIZE	PART NO.	15SH-B-XX-TR-SMT-T/R	REV.
CHECKED	CC	2/22/12	SCALE:	NTS	SHEET 1 OF 1	
APPROVED						