

Ŧ	വ	н т	m	0



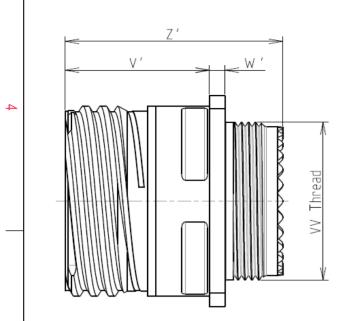

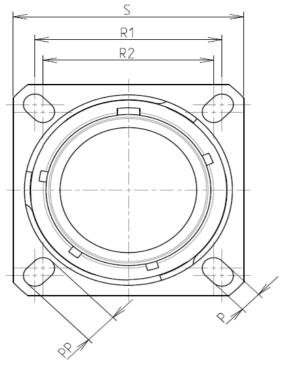

Keying Shown as example

CHARACTERISTICS

ω

 \sim

-Salt Spray

BASIC SERIES:

SHELL SIZE : 11

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite				
-Shell Plating	: Olive drab Cadmium				
-Insulator	: Thermoplastic				
-Contacts	: Copper Alloy				
-Seals & Grommet	: Silicon Elastomer				
-Contact Plating	: Gold over copper Alloy 0.8µm minimum				
-Durability	: 500 Mating cycles				
-Delivered with Souriau contacts and Accessories					
-Temperature Range	: -65°C to +175°C				

: 2000 hours

8D 0

G

11

-

J

02

F

H E

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	20.62
R2	18.26
S	26.2±0.3
V'	19.5+1.4/-0
W'	2.1/3.65
Ζ'	32 Max
VV THREAD	M15x1-6g

т	D		0		Φ	A	
							4
			LAY	OUT SHOWN AS EX	AMPLE		3
e mnector dimension n Nominal 3.25±0.2 4.93±0.2 20.62 18.26 26.2±0.3 19.5+1.4/-0 2.1/3.65 32 Max READ M15x1-6g			due to a use the Specifications	not be liable for any of the Products which issued by either of t onal recommendation Country FR	ch does not compl the Parties or by a on, technical notice Jurisdictic	y with third party	2
		PN: 8D011J02HE					
			First Release				
	ISS Designed	DATE By:	Latest modificatio Date:	n - by	C	USTOMER DRAWING	MOD N°
	TITLE		Composite Receptacle 8D series			BD series	
	SCALE NA	-		General linear Tolerances: ±		NPRDS / PROJECT 859	
ORIENTATION : E CONTACT TYPE : PIN (1500 Matings)			J WWW.SOURIAU.COM it must not be reproduced or communicated without permission			ced or	
CONTACT LAYOUT : 11-0	YOUT : 11-02 FORMAT A3		SOURIAU DRG N° 8D011J02HE-C				SHEET 1/2
E	D		С		B	A]
V							

ſ	т	G		П	m	D	0	
		Contact Layout						Panel Cutou
4	 0. (2.	+Y IB IA IA IA IA IA IA IA IA IA IA				2	SQUARE FLANGE RECEPTACLE REAR MOUNTING	(TYPE O)
	Shell Arrangement size no. 11 -2	tion X-axis Y-axis (mm) (mm) +.095 (2.41) +.000 (.00)	Contact location All				L C	Dim
ω								ØA ØAA R1 ØT
	-						due to a us the Specificatior	I not be liable for an e of the Products wh ns issued by either of sional recommendat
CA.								PN: 8D011.
							-2016 First Release TE Latest modificat Date	
_ _						SCALE NA		General linear Tolerances:
						FORMAT	AU WWW	V.SOURIAU.C
		^				A3		SOURIAU 8D011J0
	Н	G		F	E V	D	C	

