

т	۵	н <b>п</b>	m	0



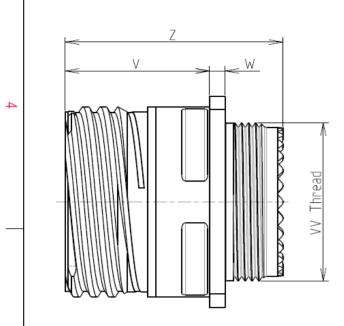

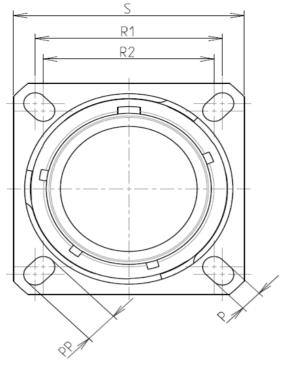

## CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 25

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

ω

 $\sim$ 

\_

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium			
-Shell Plating	: Olive drab Cadmium			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	: -65℃ to +175℃			
-Salt Spray	: 500 hours			

8D 0

G

25

-

W

41

Dim	Nominal
Р	3.91±0.2
PP	6.15±0.2
R1	38.1
R2	34.93
S	46±0.3
V	20.07+0/-1.25
W	2.1/3.2
Z	31.5 Max
VV THREAD	M37x1-6g

т п	0	U U U U U U U U U U U U U U U U U U U	A
S R1 R2 Q Q Q Q Q Q Q Q Q Q Q Q Q Q Q Q Q Q			4
Connector dimension           Dim         Nominal           P         3.91±0.2           PP         6.15±0.2           R1         38.1           R2         34.93           S         46±0.3           V         20.07+0/-1.25           W         2.1/3.2           Z         31.5 Max           VV THREAD         M37x1-6g	Country     Jurisdiction & Control List       FR     Not Listed		
P E ORIENTATION : E CONTACT TYPE : PIN(500 Matings)	A       08-10-2016       First Release         ISS       DATE       Latest modification - by         Designed By:       Date:         TITLE       Alun         SCALE       Gener         NA       Gener         SOURIAU       WWW.SOUF         FORMAT       SOU	CUSTOME minium Receptacle 8D seri ral linear rances: ± RIAU.COM	MOD N°  R DRAWING
F E	A3 8D0	D25W41PE-C	1/2 A

r	Ŧ	G	וד	m	D	0	
4		Contact Layout 41 22#22D, 3#20			Ā	SQUARE FLANGE RECEPTACLE (TYPE REAR MOUNTING	Panel Cutou
	Ctc         X           A         0           B         7.09           C         10.77           D         12.94           E         13.27           F         8.17           G         4.67           H         0	11#16, 2#12 3#8 Triax           25-41           Y         Ctc         X         Y           10.79         Y         -5.37         7.92           11.34         Z         3.32         5.72           7.92         a         7.96         -0.42           3.39         b         0         -6.6           -1.62         c         -7.96         -0.42           -6.44         d         -3.32         5.72           -12.53         e         0         4.48			۸ ۲		2
ω	I         0           J         -4.67           K         -8.17           L         -13.27           M         -12.94           N         -10.77           P         -7.09           R         5.37           S         7.32           T         10.39           U         1.77           V         -1.77           W         -10.39           X         -7.32	-13.37         f         3.02         3.07           -12.53         g         5.32         0.005           -6.44         h         3.7         -2.43           -1.62         i         2.38         -4.74           3.39         j         -2.33         4.74           7.92         k         -3.7         -2.43           11.34         m         -5.32         0.005           7.92         n         -3.02         3.07           3.91         p         0         1.81           0.67         q         2.59         -0.01           -9.66         r         0         -3.53           -9.66         s         -2.59         -0.01           0.67         t         0         -0.86           3.91         p         0         -3.53				Q Q	Dim ØA ØA R1 ØT
	<b> </b> -					SOURIAU shall not b due to a use of th the Specifications issu (professional	ne Products whi
N						PN:	Country FR 8D025V
					A 08-10-20 ISS DATE Designed By:	L6 First Release Latest modification - b Date:	Эу
<u> </u>					SCALE NA		Aluminium General linear Tolerances: ±
			_	-	FORMAT A3	S E	OURIAU.C OURIAU 3D025W
	Н	G	l F	E	D	С	

