

Power cable - SAC-4P-M12MST/ 1,5-PUR SH - 1424120

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Power cable, 4-position, PUR halogen-free, black RAL 9005, shielded (Advanced Shielding Technology), Plug straight M12, T-coded, on free cable end, cable length: 1.5 m, For direct current up to 12 A/63 V

Your advantages

- ✓ Easy and safe: 100% electrically tested plug-in components
- ✓ High-performance: DC connectors for up to 12 A and 63 V DC
- ✓ Protection against incorrect connection using special T-coding
- ✓ Shield power reliably – 360° shielding to reduce electromagnetic loads
- ✓ Our standard: robust halogen-free PUR cable

Key Commercial Data

| | |
|--------------|---|
| Packing unit | 1 pc |
| GTIN |  4 046356 693240 |
| GTIN | 4046356693240 |

Technical data

Dimensions

| | |
|-----------------|-------|
| Length of cable | 1.5 m |
|-----------------|-------|

Ambient conditions

| | |
|---------------------------------|----------------------------------|
| Ambient temperature (operation) | -25 °C ... 85 °C (Plug / socket) |
| Degree of protection | IP67 |

General

| | |
|-----------------------|----------|
| Rated current at 40°C | 12 A |
| Rated voltage | 63 V DC |
| Number of positions | 4 |
| Color handle area | black |
| Insulation resistance | ≥ 100 MΩ |
| Coding | T power |

Power cable - SAC-4P-M12MST/ 1,5-PUR SH - 1424120

Technical data

General

| | |
|------------------------------|-------------------------------|
| Standards/regulations | M12 connector IEC 61076-2-111 |
| Status display | No |
| Protective circuit/component | unwired |
| Overvoltage category | III |
| Degree of pollution | 3 |
| Insertion/withdrawal cycles | > 100 |
| Torque | 0.4 Nm (M12 connector) |

Material

| | |
|--|------------------------------|
| Flammability rating according to UL 94 | V0 |
| Contact material | CuZn |
| Contact surface material | Ni/Au |
| Contact carrier material | PA |
| Material of grip body | PP |
| Material, knurls | Zinc die-cast, nickel-plated |

Standards and Regulations

| | |
|--|-----------------|
| Standard designation | M12 connector |
| Standards/regulations | IEC 61076-2-111 |
| Flammability rating according to UL 94 | V0 |

Cable

| | |
|---|--|
| Cable type | PUR halogen-free black |
| Cable type (abbreviation) | PUR |
| Cable abbreviation | LS9YC11Y-OB |
| Conductor cross section | 4x 1.5 mm ² |
| AWG power supply | 16 |
| Core diameter including insulation | 2.4 mm |
| Thickness, insulation | 1.2 mm (Outer cable sheath) |
| Wire colors | brown, white, blue, black |
| Overall twist | 4 wires optimally twisted |
| Shielding | Tinned copper-braided shield, approx. 85% covering |
| External sheath, color | black RAL 9005 |
| External cable diameter D | 9.7 mm ±0,3 mm |
| Smallest bending radius, fixed installation | 49 mm |
| Smallest bending radius, movable installation | 73 mm |
| Number of bending cycles | 4000000 |
| Bending radius | 97 mm |
| Traversing path | 10 m |
| Traversing rate | 3 m/s |
| Acceleration | 10 m/s ² |
| Torsion force | ± 25 °/m |

Power cable - SAC-4P-M12MST/ 1,5-PUR SH - 1424120

Technical data

Cable


| | |
|---------------------------------|--|
| Outer sheath, material | PUR |
| Material conductor insulation | PP |
| Conductor material | Bare Cu litz wires |
| Insulation resistance | $\geq 10 \text{ M}\Omega \cdot \text{km}$ (at 20 °C) |
| Conductor resistance | $\leq 13.3 \text{ }\Omega/\text{km}$ (at 20 °C) |
| Nominal voltage, cable | 300 V AC |
| Test voltage, cable | 1500 V AC (5 min.) |
| Flame resistance | according to EN 60332-1-2 |
| | in acc. to UL 1581 VW1 |
| Halogen-free | according to VDE 0282-13 Appendix C |
| Resistance to oil | in accordance with DIN EN 60811-2-1 |
| | According to DIN EN 50363-10-2 |
| Ambient temperature (operation) | -40 °C ... 90 °C (cable, fixed installation) |
| | -30 °C ... 90 °C (cable, flexible installation) |

Environmental Product Compliance

| | |
|------------|---|
| REACH SVHC | Lead 7439-92-1 |
| China RoHS | Environmentally Friendly Use Period = 50 |
| | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

Drawings


Diagram

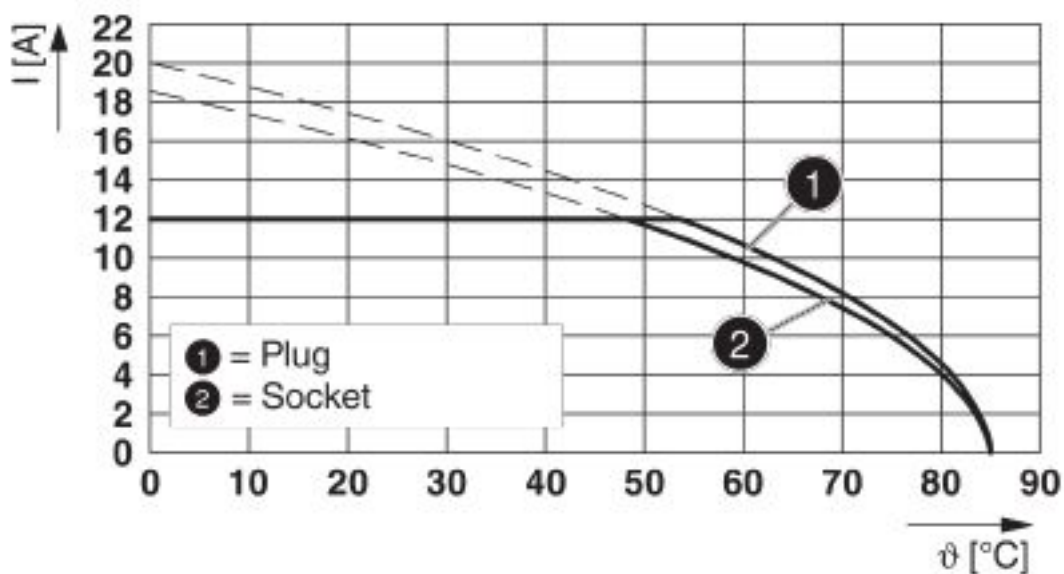

Current carrying capacity


Power cable - SAC-4P-M12MST/ 1,5-PUR SH - 1424120

Dimensional drawing

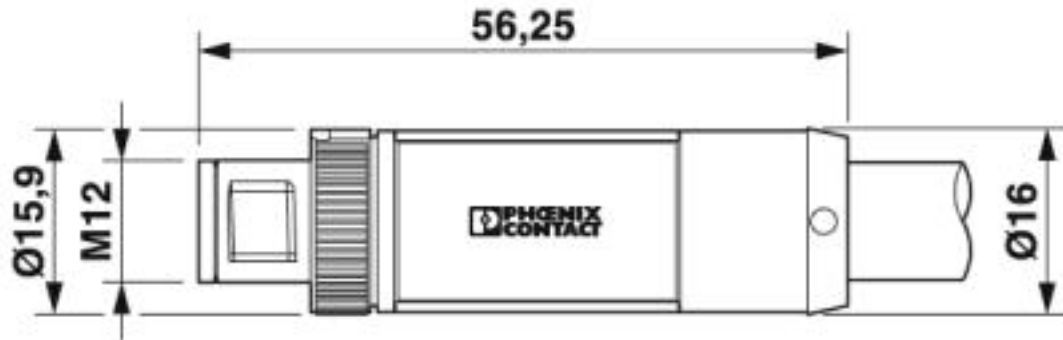

Plug, M12 x 1, straight, shielded


Circuit diagram

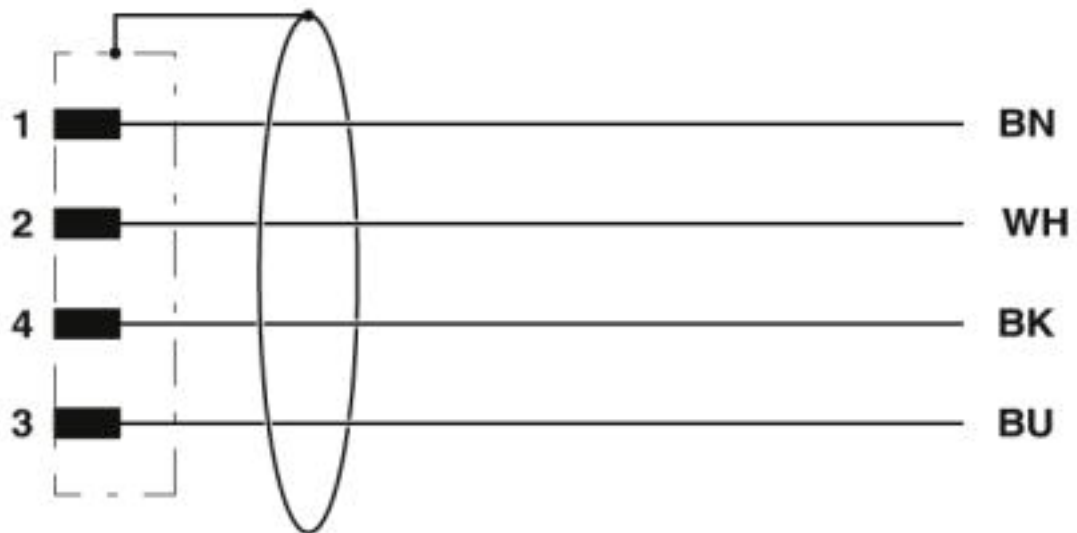

Contact assignment of the M12 plug

Power cable - SAC-4P-M12MST/ 1,5-PUR SH - 1424120


Schematic diagram

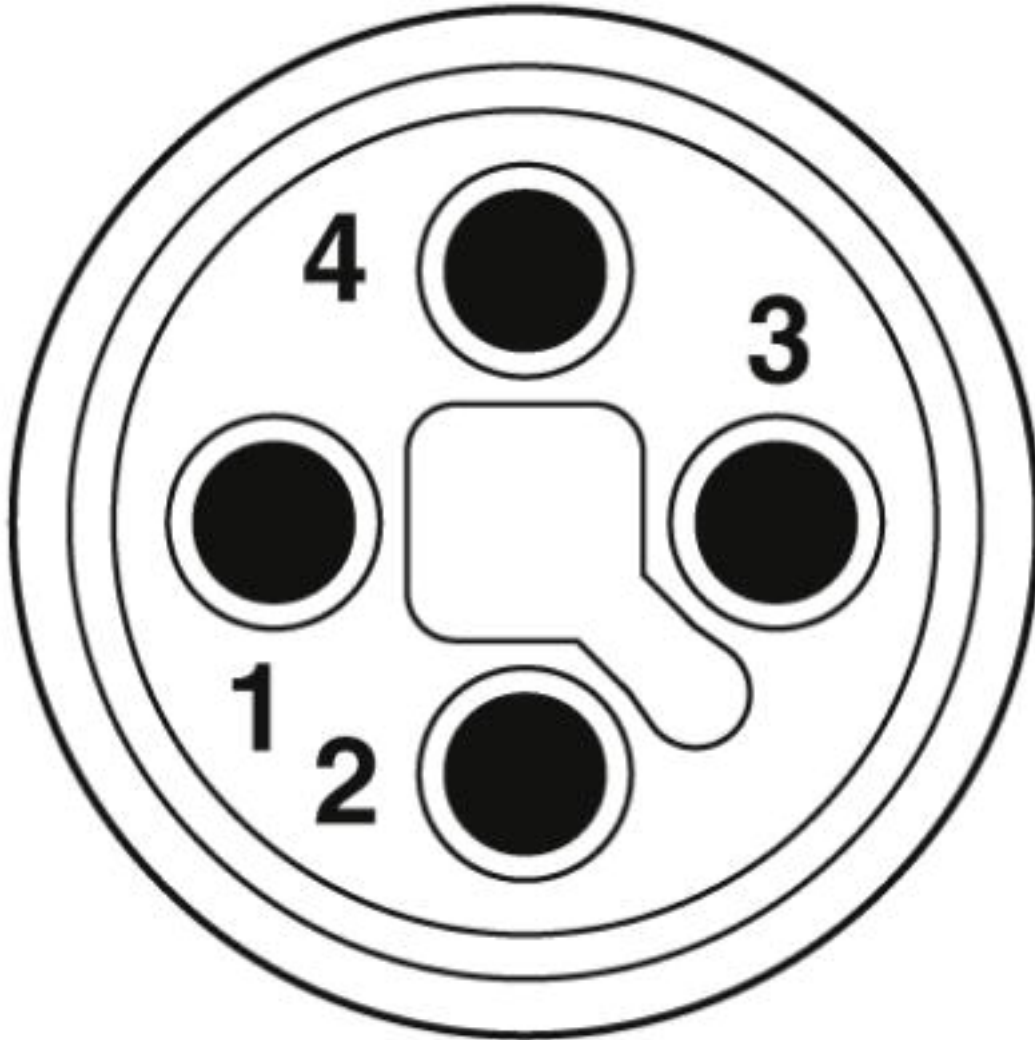

Pin assignment for M12 plug, 4-pos., T-coded, view of plug side

Power cable - SAC-4P-M12MST/ 1,5-PUR SH - 1424120

Cable cross section

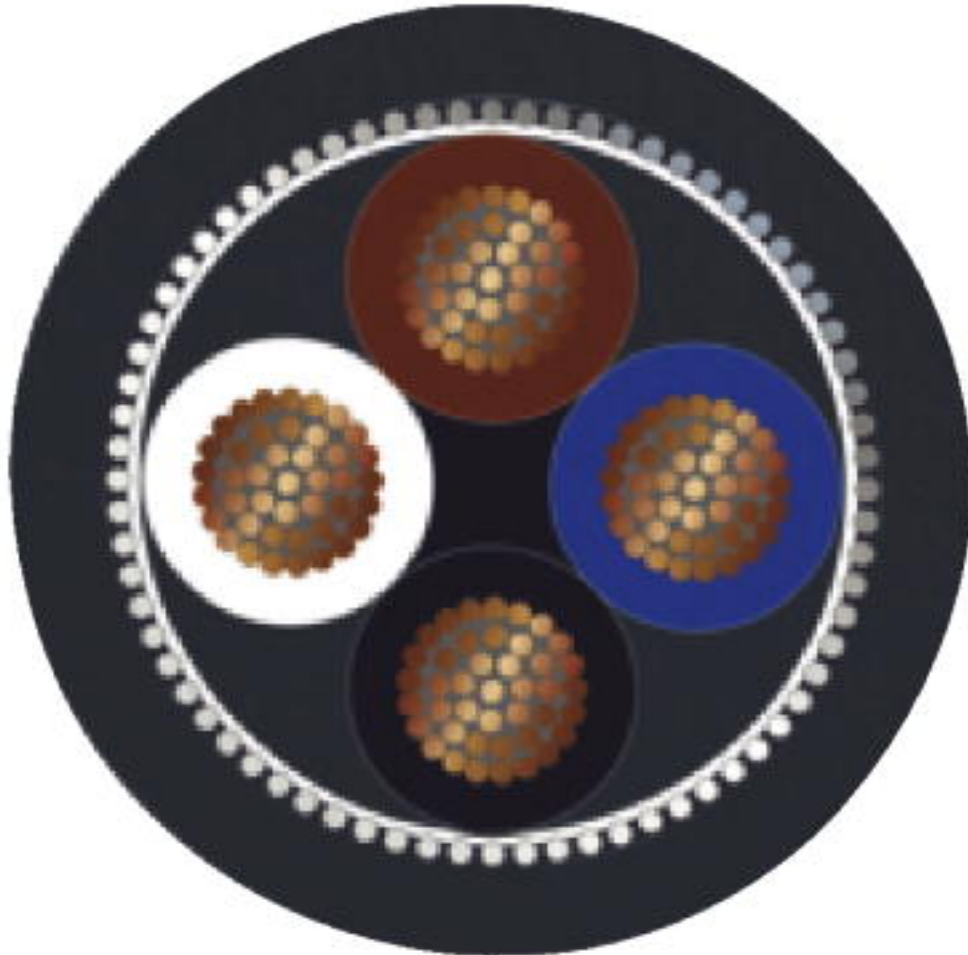

PUR halogen-free black [PUR]

Approvals

Approvals

Approvals


UL Listed / cUL Listed / cULus Listed


Ex Approvals


Approval details

Power cable - SAC-4P-M12MST/ 1,5-PUR SH - 1424120

Approvals

| | | | |
|----------------------------|---|---|---------|
| UL Listed |  | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | E468743 |
| Nominal voltage UN | | 63 V | |
| Nominal current IN | | 12 A | |
| mm ² /AWG/kcmil | | 16 | |

| | | | |
|----------------------------|---|---|---------|
| cUL Listed |  | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | E468743 |
| Nominal voltage UN | | 63 V | |
| Nominal current IN | | 12 A | |
| mm ² /AWG/kcmil | | 16 | |

| | |
|--------------|---|
| cULus Listed |  |
|--------------|---|

Phoenix Contact 2019 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>