



	ISSUE NUMBER		
ORIGINAL			

(1)

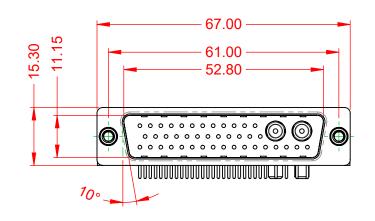




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

DIELECTRIC


WITHSTANDING VOLTAGE:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED




OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	50Ω (IMPEDANCE)
SIGNAL CONTACT CURRENT RATING:	5A PER CONTACT
SIGNAL CONTACT RESISTANCE:	10mΩ MAX.
INSULATOR RESISTANCE:	5000MΩ min.

.XX ±0.13 .XXX ±0.05



	COMBINATION D-SUB		SW REFERENCE NO.: 629 COMBO ASSEMBLY			
COMBINATION			DATE: JAN. 01/20	19		
			DATE:			
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2		
TORONTO, ONTARIO CANADA	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 629-43W	2240-5T4	ISSUE		
YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 629-43W	2240-5T4	1		

1000V AC rms



COMPLIANT

