


NUMBER
C-811034

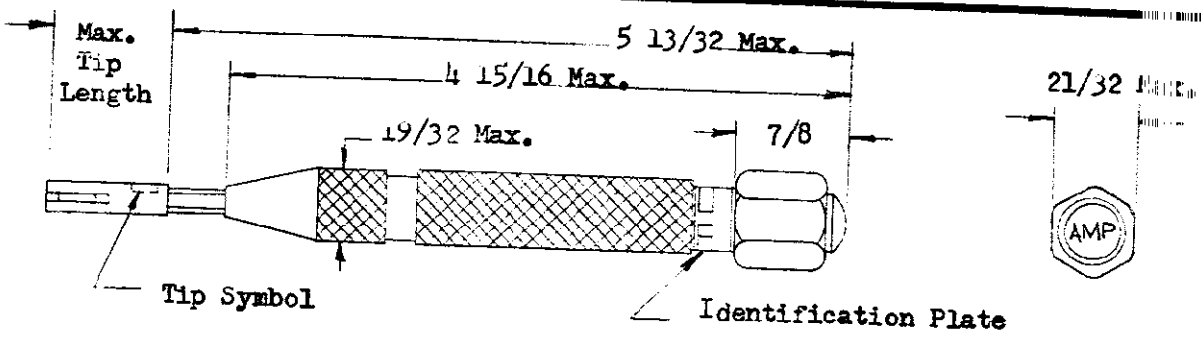

<u>Tool Number</u>	<u>Trip Force</u>	<u>Tip Number</u>	<u>Tip Symbol</u>	<u>Tip Length</u>
811034-1	12-13	811033-1	M1	1 9/32
811034-2	12-13	811033-2	M2	1 9/32
811034-3	12-13	811033-3	M3	1 9/32
811034-4	12-13	811033-4	M4	1 9/32

APPLICATION TOOLING ENGINEER
CONNECTOR PRODUCTS DIV.

1. For Tool usage, see Instruction Sheet # 7081.
2. For Tip dimensions, see Tip Customer Drawing.
3. For readjustment or replacement of parts other than Tips, return Tool to AMP, INC., Mt. Joy, Penna. to insure proper calibration.
4. Trip force is the force in pounds, required to trip the tool.

PRINT DIST. DIMENSIONS IN INCHES. DO NOT SCALE PRINT.

				©1961 BY AMP INCORPORATED. ALL RIGHTS RESERVED. AMP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING.		CUSTOMER CO REFERENCE ON	
				MATERIAL AND FINISH Steel-Plated; Aluminum Weight 3½ ± 1½ Oz.		AMP AMP INCORPORATED HARRISBURG, PENN.	
A-1 Loc. M was R				RF	-	CLASS	
A REV. & REDRAWN				YES	X	TYPE	
LTR REVISION RECORD				DR	CHK	TOLERANCE EXCEPT AS NOTED	
DR 4 E Smith 12/19				DE	11/9/63	SCALE	
CHK				APP	1/7	LOC NO	
				NAME		M A C-811034	
TOOL - STANDARD CERTI-LOK INSERTION							