

т	۵	п	m	0



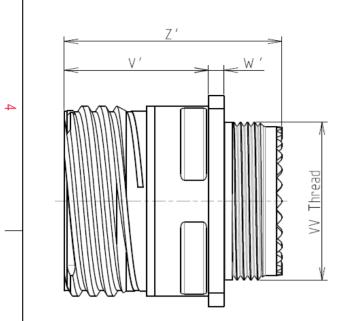

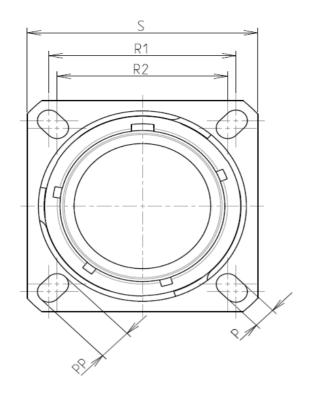

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 19

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite		
-Shell Plating	: Olive drab Cadmium		
-Insulator	: Thermoplastic		
-Contacts	: Copper Alloy		
-Seals & Grommet	: Silicon Elastomer		
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum		
-Durability	: 500 Mating cycles		
-Delivered with Souriau contacts and Accessories			
-Temperature Range	- 65℃ to +175℃		
-Salt Spray	: 2000 hours		

: 39.7 g ± 10%

8D 0

G

19

J

11

S

F

E

Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
PP	4.93±0.2			
R1	29.36			
R2	26.97			
S	36.5±0.3			
V'	19.5+1.4/-0			
W'	2.1/3.65			
Ζ'	32 Max			
VV THREAD	M28x1-6g			


ORIENTATION : E

CONTACT LAYOUT : 19-11

CONTACT TYPE : SOCKET(500 Matings)

Е

SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend

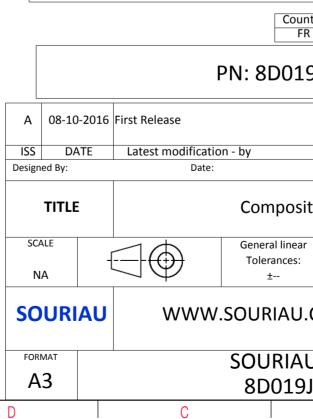

Φ		A						
	I							
				4				
Ka	and a start							
1000	1							
1								
S EXAMPLE								
any non-conformi								
which does not co of the Parties or l								
	of the Parties or by a third party ation, technical notice.)							
Intry Jurisc	Jurisdiction & Control List Not Listed							
L9J11SE								
	CUSTOMER D		/OD N°					
site Receptac	e Receptacle 8D series							
ar	NPRDS / PROJECT							
	859			1				
J.COM	This document is the property of SOURIAU							
it must not be reproduced or communicated without permission								
U DRG N°			SHEET					
JJ11SE-C		A	1/2					
5	,							

