

Ŧ	G	нт. П	т	D	C



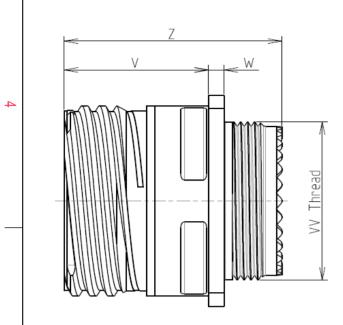



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 19

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium		
-Shell Plating	: Olive drab Cadmium		
-Insulator	: Thermoplastic		
-Contacts	: Copper Alloy		
-Seals & Grommet	: Silicon Elastomer		
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum		
-Durability	: 500 Mating cycles		
-Delivered with Souriau contacts and Accessories			
-Temperature Range	-65°C to +175°C		
-Salt Spray	: 500 hours		

: 44.66 g ± 10%

8D 0

G

19

W

11


В


F

D

Dim	Nominal	
Р	3.25±0.2	
PP	4.93±0.2	
R1	29.36	
R2	26.97	
S	36.5±0.3	
V	20.83+0/-1.25	
W	2.1/2.5	
Z	31.5 Max	
VV THREAD	M28x1-6g	

Е



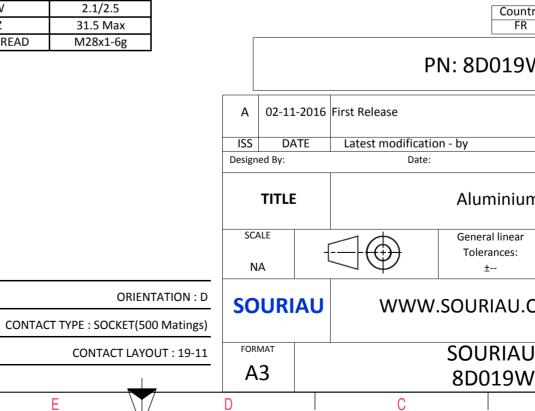

	σ	I	A					
		•			4			
S EXA	AMPLE				3			
s whic er of t	non-conformit ch does not co he Parties or t on, technical n Jurisd	mply with by a third part			2			
9W	W11BD							
				MOD N°				
		CUSTOME	R DRAWING					
um	m Receptacle 8D series							
ar :			' PROJECT 59					
J.CC	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission							
U I	U DRG N° SHEET							
W11BD-C 1/2								
	В		А					

