


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	28JUN2015	DW	CW
	A1	ECR-17-002571	23FEB2017	BS	CW
	A2	ECR-17-009384	25DEC2017	RL	CW
	A3	ECR-18-018540	07DEC2018	AL	CW

ASSEMBLY STATE OF THE PRODUCT, FOR REFERENCE

产品装配状态, 供参考

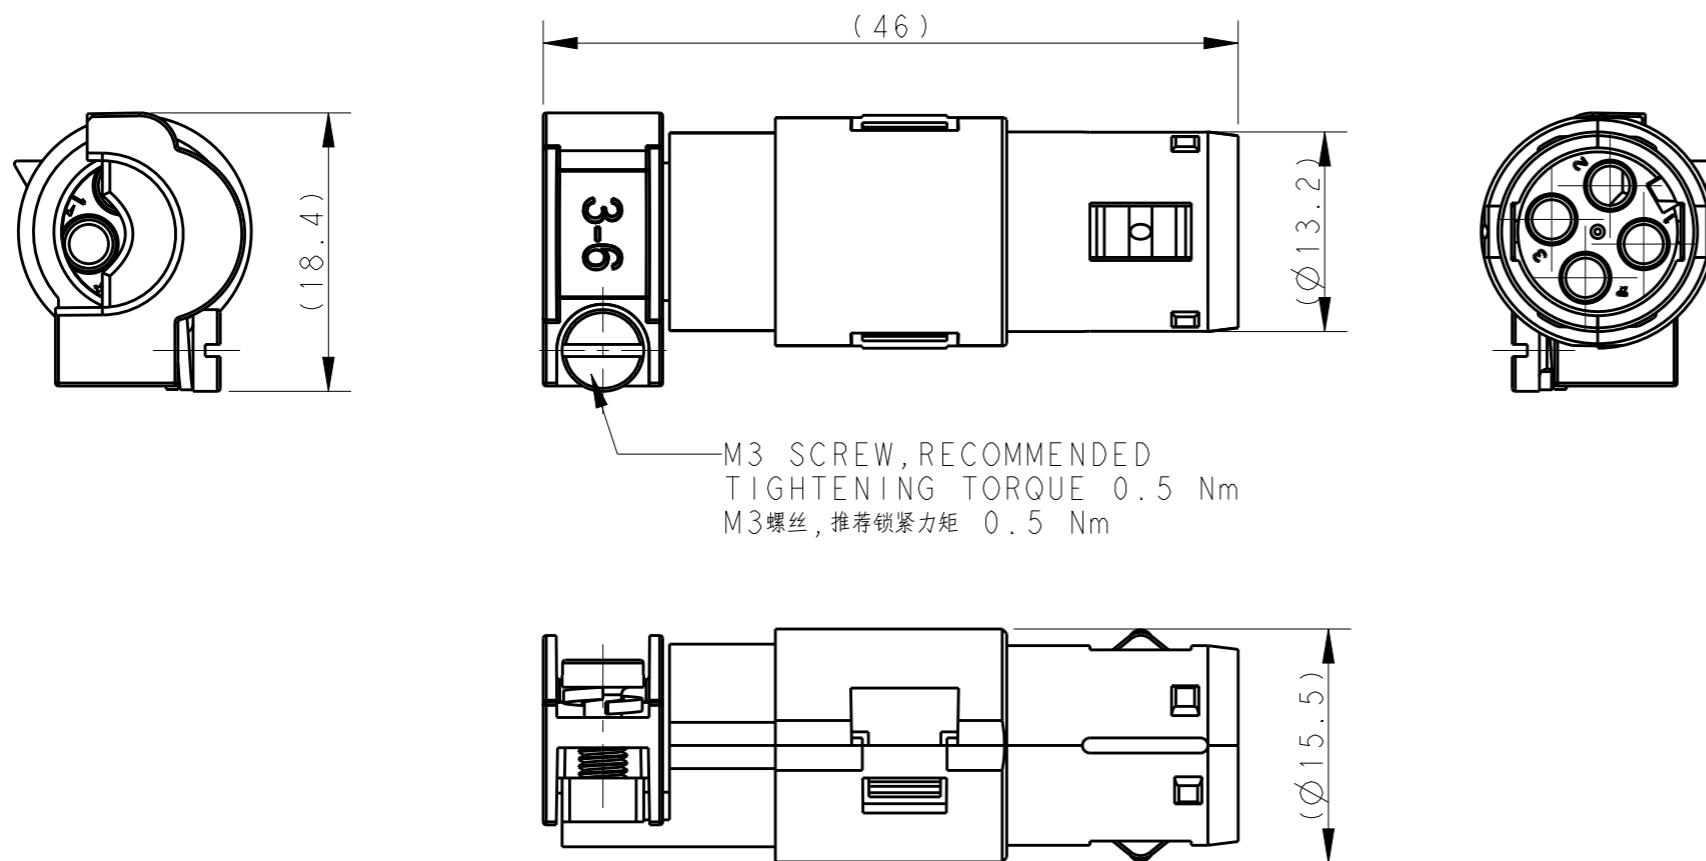

NOTES:


- TECHNICAL CHARACTERISTICS:
 INSULATION MATERIAL: PC
 RATED VOLTAGE: 50V
 RATED CURRENT: 10A
 RATED IMPULSE VOLTAGE: 0.8KV
 POLLUTION DEGREE: 3
 FLAMMABILITY: UL94V-0
 WIRE RANGE: 0.14-2.5 mm² (26-14 AWG)
 CABLE DIAMETER: 3 - 9.5 mm
 CONTACT TYPE: CRIMP CONTACT
- CONTACT NEED TO BE ORDERED SEPARATELY.
 (ORDER No.REFER TO DRAWING:T20200X20XX000)

注释:


- 技术参数:
 绝缘材料: PC
 额定电压: 50V
 额定电流: 10A
 额定脉冲电压: 0.8KV
 污染等级: 3
 阻燃等级: UL94V-0
 接线范围: 0.14-2.5 mm² (26-14 AWG)
 电缆外径: 3-9.5 mm
 接线类型: 冷压接
- 端子需要单独订购.
 (订货号参考图面:T20200X20XX000)

FOR Ø6-9.5mm CABLE
用于直径Ø6-9.5mm 电缆线

FOR Ø3-6mm CABLE
用于直径Ø3-6mm 电缆线

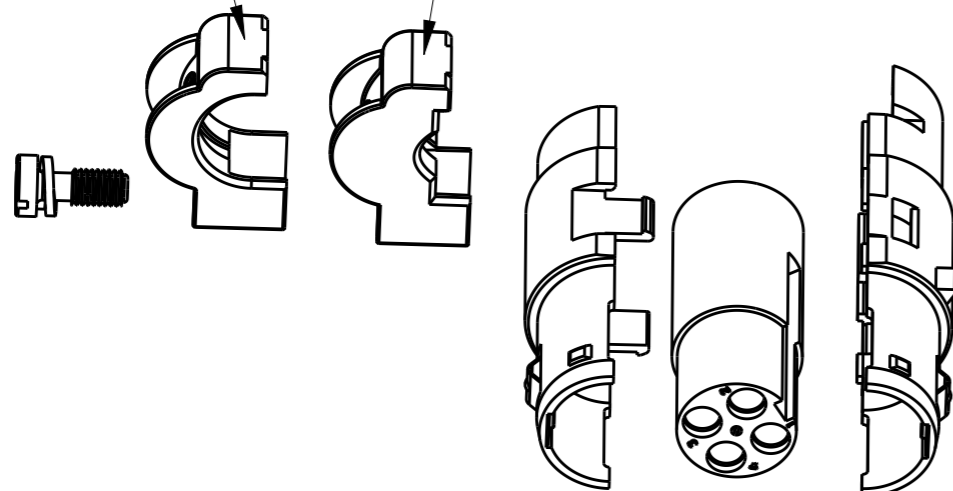

T2580032154-000	PIN-Q2-F	QUINTAX FEMALE CONTACT 4-POS QUINTAX 4-POS母针
PART NUMBER 料号	PART DESCRIPTION 描述	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 28JUN2015 David Wang	 TE Connectivity			
DIMENSIONS: mm		CHK 28JUN2015 Chris Wang			NAME QUINTAX FEMALE CONTACT 4-POS PIN-Q2-F	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 28JUN2015 Xiang Xu				
0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±-		PRODUCT SPEC 108-137067				
MATERIAL	FINISH	APPLICATION SPEC 114-137067	SIZE A3	CAGE CODE 00779	DRAWING NO T2580032154000	RESTRICTED TO
-	-	WEIGHT -	SCALE 2:1		SHEET 1 OF 1	REV A3
Customer Drawing						