





ISSUE NUMBER	
ORIGINAL	1

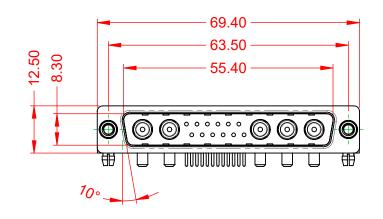




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:


THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED

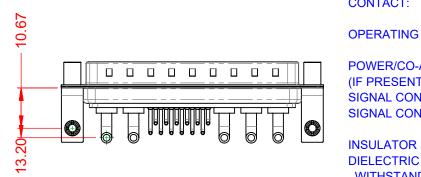

OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	20A (CURRENT)
SIGNAL CONTACT CURRENT RATING:	5A PER CONTACT
SIGNAL CONTACT RESISTANCE:	10mΩ MAX.
INSULATOR RESISTANCE:	5000MΩ min.

.XX ±0.13 .XXX ±0.05

1000V AC rms



				SW REFERENCE NO.: 629 COMBO ASSEMBLY		
	COMBINATION D-SUB		DRAWN: C.B	DATE: JAN. 01/20)19	
		CHECKED:	DATE:			
EDAC INC TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2		
	,	SHALL NOT BE REPRODUCED OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 629-17	W5240-2TD	ISSUE	
	QUALITY & SERVICE		PART NUMBER: 629-17	N5240-2TD	1	



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

			FDA
			TORONTO
			CAI
YOUR C	ONNEC	TION T	O QUALITY 8

WITHSTANDING VOLTAGE:

~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~			6	
	000			
		Ś		

