

CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes




ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	3-2 @20°C	2.385 ohms max.
D.C. RESISTANCE	2-1 @20°C	3.237 ohms max.
D.C. RESISTANCE	5-4 @20°C	0.486 ohms max.
D.C. RESISTANCE	7-6 @20°C	0.202 ohms max.
INDUCTANCE	3-1 70kHz, 100mVAC, Ls	2.18mH ±10%
LEAKAGE INDUCTANCE	3-1 tie(5+4, 7+6), 70kHz, 100mVAC, Ls	40.0uH max.
DIELECTRIC	3-6 tie(3+4), 3750VAC, 1 second	-
6B TURNS RATIO	(3-1):(5-4)	16.0:1
6B TURNS RATIO	(3-1):(7-6)	6.2:1

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

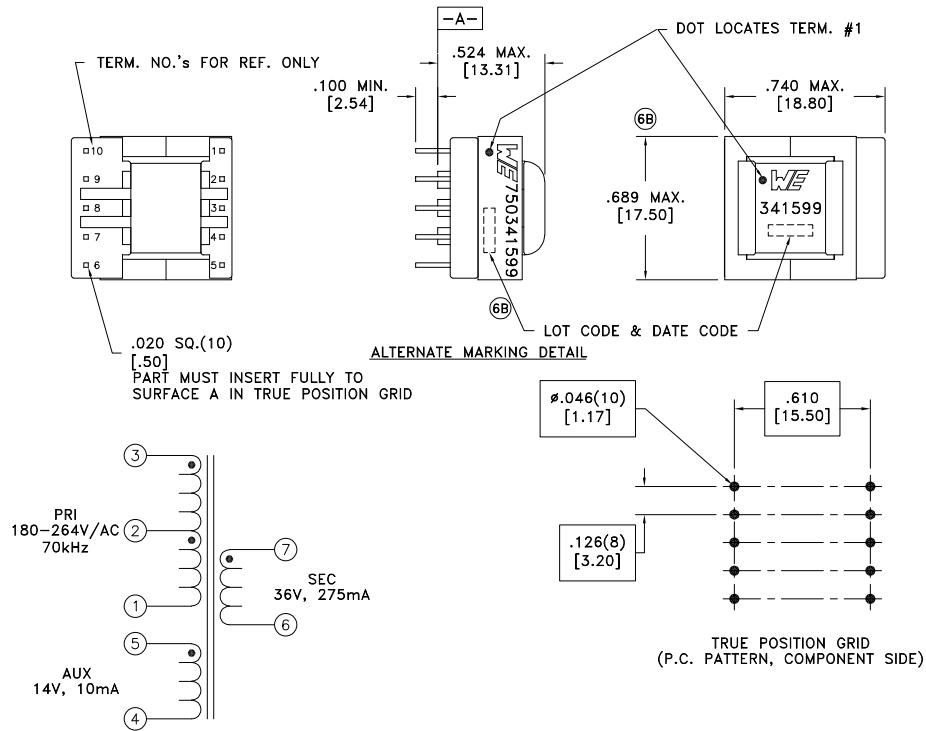

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications Method: Tray PKG-0887 www.we-online.com/midcom		Tolerances unless otherwise specified: Angles: ±1° Fractions: ±1/64 Decimals: ±.005 [.13] Footprint: ±.001 [.03]	DRAWING TITLE TRANSFORMER	PART NO. 750341599
6B	1/23	SEE REVISION SHEET FOR REVISION LEVEL		This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 750341599	
6A	1/13					SPECIFICATION SHEET 1 OF 1