

	т	۵	н п	m	D	0	
]							



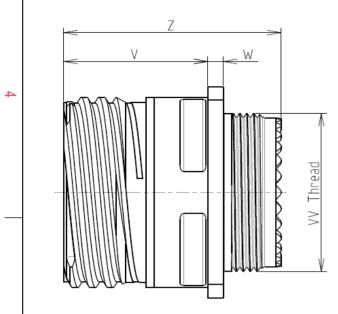

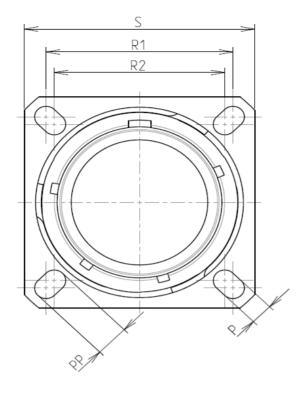

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 21

SHELL TYPE : Square Flange Receptacle

PLATING : X = Without Plating

Н

CONTACT TYPE : Standard Crimp Contact

-Mass

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite
-Shell Plating	: Without Plating
-Insulator	: Thermoplastic
-Contacts	: Copper Alloy
-Seals & Grommet	: Silicon Elastomer
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum
-Durability	: 500 Mating cycles
-Delivered with Souriau	contacts and Accessories
-Temperature Range	65℃ to +175℃

: 2000 hours

: 51.9 g ± 10%

8D 0

G

21

Х

39

В

F

С


Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
РР	4.93±0.2			
R1	31.75			
R2	29.36			
S	39.7±0.3			
V	20.07+0/-1.25			
W	2.1/3.2			
Z	31.5 Max			
VV THREAD	M31x1-6g			


ORIENTATION : C

CONTACT LAYOUT : 21-39

CONTACT TYPE : SOCKET(500 Matings)

Е



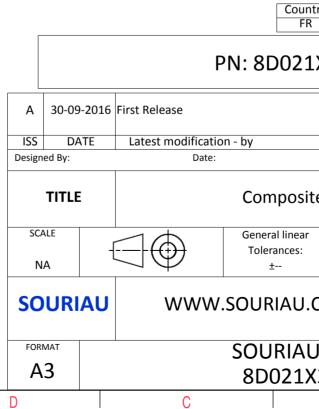

-					
σ		A			
			4		
			3		
S EXAMPLE					
any non-conformity or damage which does not comply with or of the Parties or by a third party adation, technical notice.)					
Intry Jurisc R	liction & Control Lis Not Listed	st	2		
1X39BC					
	CUSTOMER DRA	MOD N°			
ite Receptacle 8D series					
ar	NPRDS / PROJ 859	ECT			
	This document	is the property of	1		
.COM SOURIAU it must not be reproduced or communicated without permission					
UDRG N° SHEET					
.X39BC-C		1/2 A			
-	·				

