

TOLERANCE UNLESS OTHERWISE SPECIFICATION OF MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER

(1)





NOTES:

.X ±0.25 .XX ±0.13

.XXX ±0.05


MATERIAL: HOUSING: THERMOPLASTIC POLYESTER, UL94V-0 SHELL: STEEL, NICKEL PLATED CONTACT: COPPER ALLOY, GOLD FLASH PLATING

OPERATING TEMPERATURE: -55°C ~ 125°C

 $\label{eq:signal_contact_current rating: 5A per contact} \\ \mbox{Signal_contact resistance: 10m} Ω MAX. \\ \mbox{Insulator resistance: 5000M} Ω min. \\ \mbox{Dielectric} \\ \mbox{Withstanding voltage: 1000V AC rms} \\ \mbox{Insulator resistance: 1000V AC rms} \\ \mbox{Insulator resist$

CONTACT CODE 40 POWER CONTACT FOOTPRINT - 13.20mm 40 IS STANDARD AS SHOWN ON SHEETS 3 & 4 CONTACT CODE 50 POWER CONTACT FOOTPRINT - 20.33mm


			SW REFERENCE NO.: 630 COMBO ASSEMBLY			
			DRAWN: C.B	DATE: JAN. 01/20	19	
			CHECKED:	DATE:	DATE:	
	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	4	
YOUR CC	YOUR CONNECTION TO QUALITY & SERVICE	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 630-17W2250-4ND		ISSUE	
			PART NUMBER: 630-17	W2250-4ND	1	





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY. UL94V-0

ORIGINAL

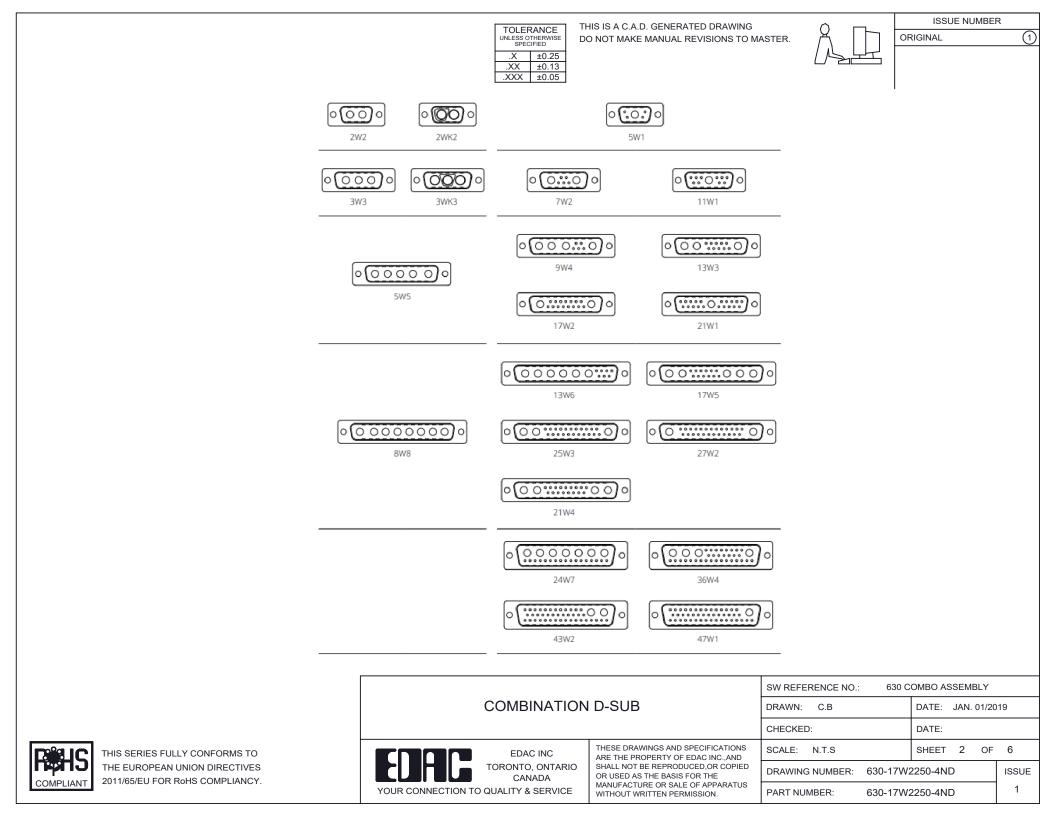



THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER ORIGINAL

 $\overline{(1)}$

2W2 / 2WK2

3W3 / 3WK3

5W1 Male/Female

7W2 Male/Female

11W1 Male/Female

17W2 Male/Female





5W5 Male



PCB EDGE

8W8 Male



PCB EDGE



PCB EDGE




27W2 Male/Female

21W4 Male/Female


PCB EDGE


5W5 Female


COMPLIANT



8W8 Female








21W1 Male/Female




			r		
			SW REFERENCE NO.: 630 COMBO ASSEMBLY		
COMBINATION D-SUB		DRAWN: C.B	DATE: JAN. 01/20)19	
			CHECKED:	DATE:	
то	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE: N.T.S	SHEET 3 OF	4
IVES NCY.	YOUR CONNECTION TO QUALITY & SERVICE	SHALL NOT BE REPRODUCED OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 630-17W2250-4ND		ISSUE
NOT.			PART NUMBER: 630-1	7W2250-4ND	1

CURRENT RATING / ØA 10A / 2.2 20A / 3.3 30A / 3.7 40A / 4.2









THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.















13W3 Male





25W3 Male





2.77

24.77

23.36

PCB EDGE

PCB EDGE

31.75

32.00


15.50

2.77

PCB EDGE

21.9

36W4 Female



13W6 Male





30.50

2.77

22.16

20.76

13W6 Female

13W3 Female

.X ±0.25 .XX ±0.13 .XXX ±0.05

43W2 Female




17W5 Male


COMPLIANT














				<u>.</u>		
				SW REFERENCE NO.: 630 COMBO ASSEMBLY		
	COMBINATION D-SUB		DRAWN: C.B	DATE: JAN. 01/20	19	
				CHECKED:	DATE:	
3	THIS SERIES FULLY CONFORMS TO	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: N.T.S	SHEET 4 OF	4
_	THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR R₀HS COMPLIANCY.	YOUR CONNECTION TO QUALITY & SERVICE	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 630-17W	2250-4ND	ISSUE
				PART NUMBER: 630-17W	2250-4ND	1

20.7

13.72





