







(1)

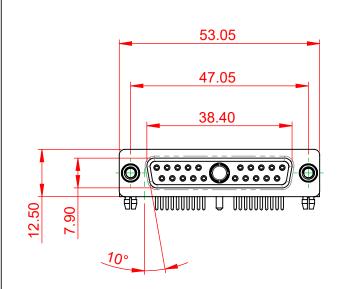



NOTES:

.XX


±0.13

.XXX ±0.05

MATERIAL: HOUSING: SHELL: CONTACT:	THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, 30µ GOLD PLATED	
OPERATING TEMPERATURE:	-55°C ~ 125°C	
POWER/CO-AX CONTACT RATING: (IF PRESENT)	10A (CURRENT)	
SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:		TH
INSULATOR RESISTANCE: DIELECTRIC	5000MΩ min.	

1000V AC rms

SW REFERENCE NO .: 630 COMBO ASSEMBLY COMBINATION D-SUB DATE: JAN. 01/2019 DRAWN: C.B CHECKED: DATE: THESE DRAWINGS AND SPECIFICATIONS OF 2 SCALE: (IN C.A.D. 1:1) SHEET 1 EDAC INC ARE THE PROPERTY OF EDAC INC. AND TORONTO, ONTARIO SHALL NOT BE REPRODUCED, OR COPIED 630-21W1650-1ND ISSUE DRAWING NUMBER: OR USED AS THE BASIS FOR THE CANADA MANUFACTURE OR SALE OF APPARATUS 1 YOUR CONNECTION TO QUALITY & SERVICE PART NUMBER: 630-21W1650-1ND





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.



WITHSTANDING VOLTAGE:

WITHOUT WRITTEN PERMISSION.

