


Notes:

1. Only RoHS Compliant Processes and Materials used for this assembly.
2. Marking to Contain "ConductRF", Part No. & WK/YR Date Code, Black Text.
3. Single Centered Marker up to 15'(4.5M), Two Markers 12"(30cm) from ends for lengths over 15'(4.5M)

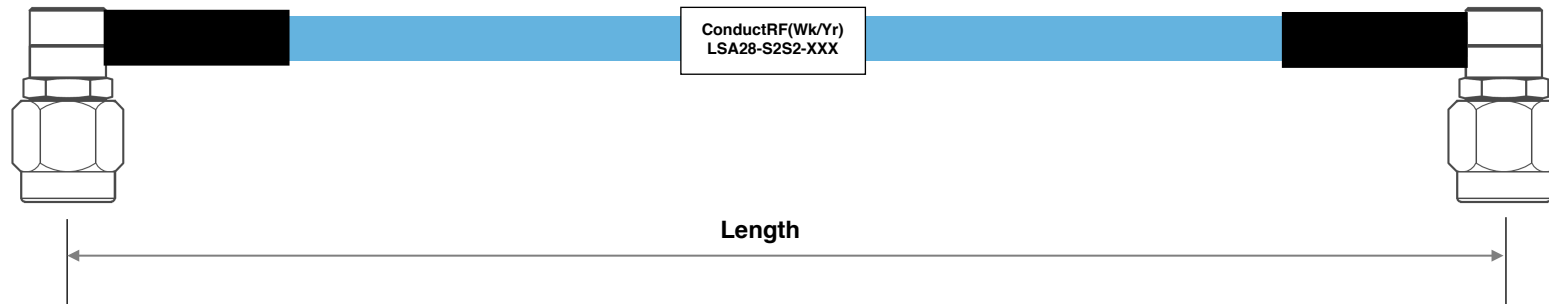


ConductRF # (XXX)	Length (in.)	Max. Insertion Loss(dB) Typ.		
		6GHz	12GHz	18GHz
S06	6"	0.51	0.74	0.92
S08	8"	0.62	0.90	1.12
S12	12"	0.84	1.22	1.52
S16	16"	1.06	1.53	1.91
S18	18"	1.17	1.69	2.11
S24	24"	1.49	2.17	2.70
S36	36"	2.15	3.12	3.89
S48	48"	2.80	4.07	5.08
S60	60"	3.45	5.02	6.27
VSWR Typ.		1.18:1	1.25:1	1.35:1

Part No. Configurator - XXX

FXX = Length in Feet (eg F03=3ft)
 SXX = Length in Inches (eg S18=18")
 XMX = Length in Meters (eg 2M5=2.5m)
 CXX = Length in CM (eg C50=50cm)

ITEM	DESCRIPTION	MATERIALS	FINISH
5	Label	Shrink Tube	White
4	Strain Relief	CPA100 or Equiv.	Black
3	Flexible Spiral Coax	A28SS	Blue FEP
2	SMA R/A Male	PSM21A-A28G01	Pass. SS
1	SMA R/A Male	PSM21A-A28G01	Pass. SS

REV.	DESCRIPTION	ECN	DRAWN	DATE	Customer DWG	Title: Low Loss Flex 0.086" R/A SMA M to R/A SMA M Assembly				
3	Updated Table Data		DG	10/28/19	Remarks:	Originated:	Conduct RF	Range: LSA		Sheet 1 of 1
2	Updated Graphics to Color		DG	06/09/16		01/27/14	sales@ConductRF.com	Tel: +1 978 374 6840		Dwg Ref: LSA28-S2S2
1	Pre-Release		DG	01/27/14						
					Length Tolerances: ≤24" = ±0.25" >24" = ± 1%	Checked: JW	Approved: PL	Rev: 3	Part No: LSA28-S2S2-XXX	
REVISION HISTORY										