


REV.	DATE	DESCRIPTION
A	01/13/99	ADD CRIMP NOTES / CHANGE FERRULE DIMS.

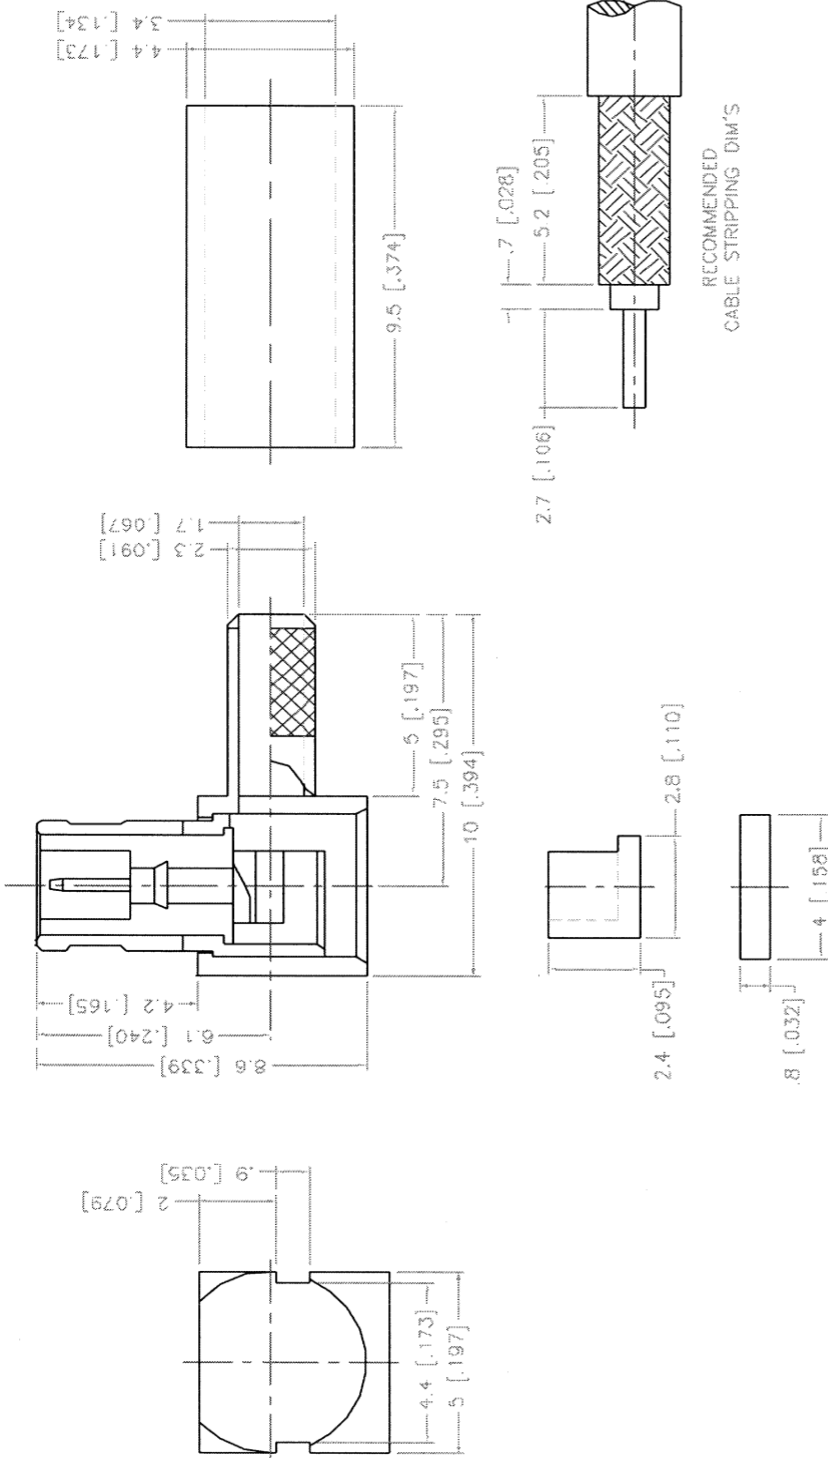

NOTE:
 USE .151 HEX CRIMP DIE TO
 TERMINATE FERRULE TO CABLE.
 - CONNEX TOOL 47-10160
 - IDEAL TOOL 36-489

DESCRIPTION	FINISH	MATERIAL	APPROVALS	DATE
1 HOUSING	NICKEL	BRASS	G.R.S.	01/13/99
2 BODY	NICKEL	BER. COPPER	CHECKED	
3 INSULATOR-1	NATURAL	TEFLON	ISSUED	
4 CONTACT PIN	GOLD	BRASS		
5 INSULATOR-2	NATURAL	DELTRIN		
6 COVER	NICKEL	BRASS		
7 FERRULE	NICKEL	COPPER		
8				

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS		DIMENSIONS IN () ARE IN INCHES	
FOR CUSTOMER REFERENCE ONLY			
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:			
0.5-6	= ± 0.2	6-30	= ± 0.4
30-120	= ± 0.6	120-315	= ± 1
315-1000	= ± 1.6	1000-2000	= ± 2.4
DO NOT SCALE DRAWING			

TITLE	MCX R/A CRIMP PLUG
SIZE	RG 174/u, 316/u DOUBLE BRAIDED CABLE
FSCM NO.	99001
DWG. NO.	252118.DWG
REV.	A

SCALE	NA	PART NO.	252118	SHEET	1 OF 1
-------	----	----------	--------	-------	--------

