

TOLERANCE UNLESS OTHERWISE SPECIFIED .X ±0.25 .XX ±0.13 .XXX ±0.05


THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



**ISSUE NUMBER** 

ORIGINAL


(1)



## NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED

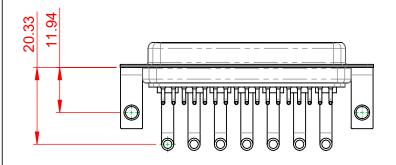


## **OPERATING TEMPERATURE:**

**POWER/CO-AX CONTACT RATING:** 30A (CURRENT) (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE:  $10m\Omega$  MAX.

**INSULATOR RESISTANCE:** DIELECTRIC WITHSTANDING VOLTAGE: 5000MΩ min.

-55°C ~ 125°C

1000V AC rms



|   | COMBINATION D-SUB                      |  | SW REFERENCE NO.: 630 COMBO ASSEMBLY |                    |       |
|---|--|--|--------------------------------------|--------------------|-------|
| ļ |  |  | DRAWN: C.B                           | DATE: JAN. 01/2019 | Э     |
| 1 |  |  | CHECKED:                             | DATE:              |       |
|   | EDAC INC<br>TORONTO, ONTARIO<br>CANADA | THESE DRAWINGS AND SPECIFICATIONS<br>ARE THE PROPERTY OF EDAC INC.,AND<br>SHALL NOT BE REPRODUCED,OR COPIED<br>OR USED AS THE BASIS FOR THE<br>MANUFACTURE OR SALE OF APPARATUS<br>WITHOUT WRITTEN PERMISSION. | SCALE: (IN C.A.D. 1:1)               | SHEET 1 OF         | 2     |
|   |  |  | DRAWING NUMBER: 630-24W7250-3T4      |                    | ISSUE |
|   | YOUR CONNECTION TO QUALITY & SERVICE   |  | PART NUMBER: 630-24W7                | 7250-3T4           | 1     |



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

