




Data sheet | Item number: 756-5311/030-020

Sensor/Actuator cable; M12A plug; straight; 3-pole; Length: 2 m

www.wago.com/756-5311/030-020



 Picture differs from the item.

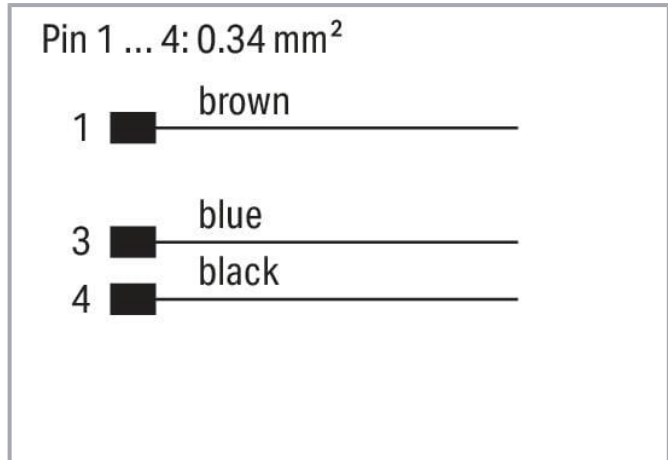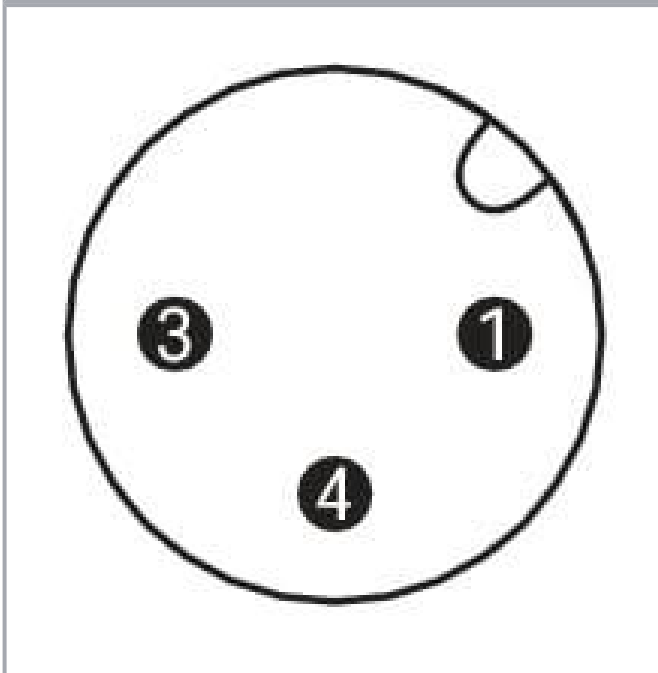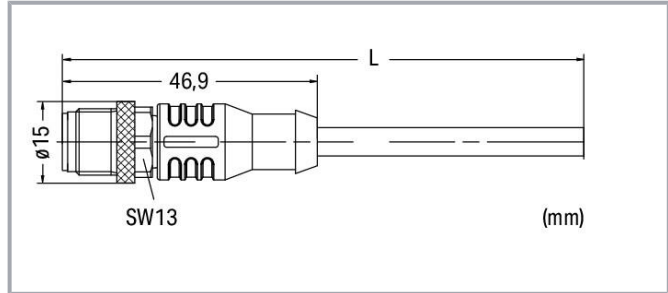

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

Item description

Short description:

- PUR, halogen-free
- Suitable for drag chains
- High resistance to microbes, hydrolysis, oil, chemicals and UV radiation
- High chemical resistance
- Cable used: UL listed

Data

Technical data

General

Operating voltage	250 VAC/DC
Operating current	4 A
Rated surge voltage	2.5 kV
Contact resistance	10 mΩ
Conductor resistance	≤ 60 Ω/km
Pollution degree	3 per VDE 0110
Protection type	IP67
Ambient (operating) temperature (static)	-50 ... +90 °C
Ambient (operating) temperature (dynamic)	-25 ... +90 °C

Suitable for drag chains

Bending radius	10 x cable diameter (min.)
Bending cycles	2 Mio.
Acceleration (min.)	5
Travel speed (max.)	3.33
Travel path (horizontal) max.	5
Travel path (vertical) max.	2
Torsional capacity	180

Cable

Cable length	2 m
Type code	LiF9YH-11YH or LiF9YC11YFHF

Subject to changes. Please also observe the further product documentation!



Conductor configuration	Bare copper wire, fine-stranded (42 x 0.1 mm)
Conductor insulation	PP9Y (halogen-free)
Sheath material	Polyurethane (PUR), halogen-free per DIN VDE 0472 Part 815, flame resistant per IEC 332-2, self-extinguishing
Sheathed cable color	black
Sheathed cable diameter	4.1 ... 4.5 mm

Connector

Connection type	M12 plug - free end
Cable connection direction to mating direction	0°
Connector interface coding (cable/adapter) 1 1	A-coded
Housing material	Polyurethane (PUR)
Contact material	CuSn
Tightening torque	1 Nm

Commercial data

eCl@ss 10.0	27-06-03-11
eCl@ss 9.0	27-06-03-11
ETIM 8.0	EC001855
ETIM 7.0	EC001855
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	HU
GTIN	4045454405830
Customs tariff number	85444290900

Environmental Product Compliance

CAS-No.	7439-92-1
REACH Candidate List Substance	Lead
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	07539909-d54d-49b3-9bca-5aba902ae71e
SCIP notification number (Belgium)	46efb589-7e9b-45a4-8456-fb80b43907d9
SCIP notification number (Bulgaria)	74ae997b-222e-4be6-8c93-ee1ddfc9a54
SCIP notification number (Czech Republic)	cfaf2747-619d-49d8-be30-533bc1385a9e
SCIP notification number (Denmark)	0e6ea2b0-068d-415c-a2ce-7b8328f2b4e3
SCIP notification number (Finland)	80c2893f-93cf-4fc0-9c16-063ac9e706c3

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
 Hansastr. 27
 32423 Minden
 Phone: +49571 887-0 | Fax: +49571 887-169
 Email: info.de@wago.com | Web: www.wago.com


Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.



SCIP notification number (France)	78d3aaff-0bfa-4ead-9de7-b404f6e1e80c
SCIP notification number (Germany)	7457c517-5139-4942-9ee1-6f57679b701b
SCIP notification number (Hungary)	865e487b-d4ba-43bf-bb26-139edceb7519
SCIP notification number (Italy)	a4eb34bb-e863-4595-bb91-6f3aa5545f1c
SCIP notification number (Netherlands)	9110d1cd-f9e7-42ca-a3e3-a135b1b69c02
SCIP notification number (Poland)	3998dc76-7ae8-495a-aeb3-6875bf82a8b6
SCIP notification number (Romania)	d9c14a13-3093-47c3-82ec-18c80f617d0b
SCIP notification number (Sweden)	1a24f2c5-887c-4dd3-af9a-a6260c3eaeef2

Approvals / Certificates

General approvals

Logo	Approval	Additional Approval Text	Certificate name
	UL Underwriters Laboratories Inc.	UL 2238	E519602

Downloads

Documentation

System Description

IP67 Cables and Pluggable Connectors	pdf 161.6 kB	Download
--------------------------------------	-----------------	----------

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 756-5311/030-020 Sensor/Actuator cable; M12A plug; straight; 3-pole; Length: 2 m	URL	Download
--	-----	----------

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
 Hansastr. 27
 32423 Minden
 Phone: +49571 887-0 | Fax: +49571 887-169
 Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.