ſ	т <u>Ω</u> п		0	∞ >		
4						
ယ			LAYOUT SHOWN AS EXA	MPLE		
	Keying Shown as example					
	CHARACTERISTICS Connector di	mension				
	-Standard : Based on MIL-DTL-38999 Series III Dim	Nominal				
0	-Shell Material : Aluminium ØS -Shell Plating : Olive drab Cadmium Z -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8µm minimum	29.4 Max 31 Max M18x1-6g	SOURIAU shall not be liable for any r due to a use of the Products whic the Specifications issued by either of tl (professional recommendatio Country FR	h does not comply with he Parties or by a third party		
	-Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories		PN: 8D513W03PD			
	-Temperature Range : -65°C to +175°C	A 18-1	10-2016 First Release			
	-Salt Spray : 500 hours	ISS D	DATE Latest modification - by		MOD N°	
		Designed By:		CUSTOMER DRAWING		
		TITL	E Aluminium Plug 8D series			
<u> </u>	BASIC SERIES: 8D 5 - 13 W 03 P D SHELL TYPE : Plug with RFI Shielding - 13 W 03 P D	SCALE	General linear Tolerances:	NPRDS / PROJECT 859		
	CONTACT TYPE : Standard Crimp Contact ORIENTATION :		SOURIAU This document is the propert SOURIAU SOURIAU it must not be reproduced			
		ACT TYPE : PIN(500 Matings)		communicated without p		
	PLATING : W = Olive drab Cadmium	CONTACT LAYOUT : 13-03	SOURIAU [SHEET	
			8D513W0	3217-0	1/2	

_	т	۵	п	т	D	C		
		Contact Layout						
4		03						
	Ctc A B	3#16 13-03 X Y 2.39 1.47 0 -2.79						
ω	C	-2.39 1.47						
						SOURIAU shall not be liable for a due to a use of the Products w the Specifications issued by either (professional recommend)		
N							Coun	
						PN: 8	L	
					A 18-10-2016 ISS DATE Designed By:	5 First Release Latest modification - by Date:		
					TITLE		Alumi	
_					SCALE NA		eral linear lerances: ±	
					SOURIAU	WWW.SOU	RIAU.	
					FORMAT	SO	URIAU	

G

Н


F

Е

A3

D

С

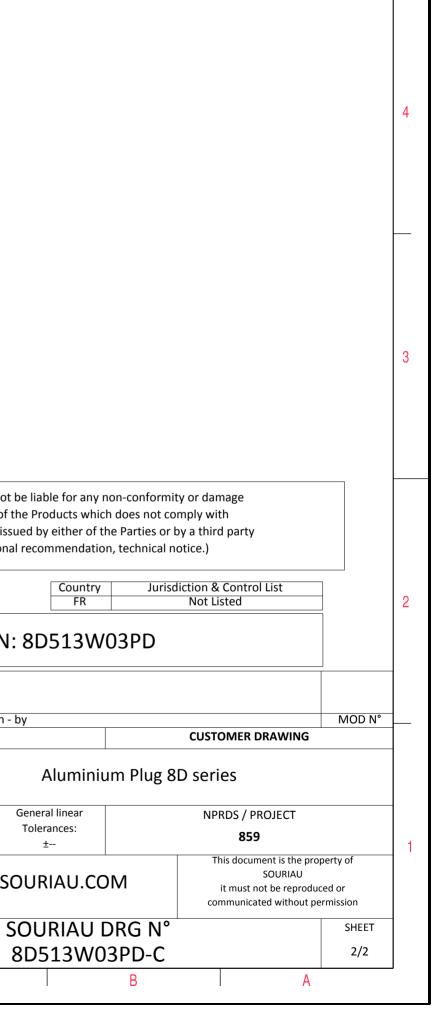

 \triangleright

σ