

I I I I I I I I I I I I I I I I I I I	ם D	П	m	D	C



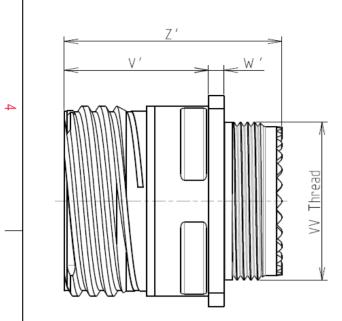



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 11

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite			
-Shell Plating	: Olive drab Cadmium			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	_∶ -65°C to +175°C			

: 2000 hours

8D 0

G

11

J

05

J


F

D

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V'	19.5+1.4/-0		
W'	2.1/3.65		
Ζ'	32 Max		
VV THREAD	M15x1-6g		

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

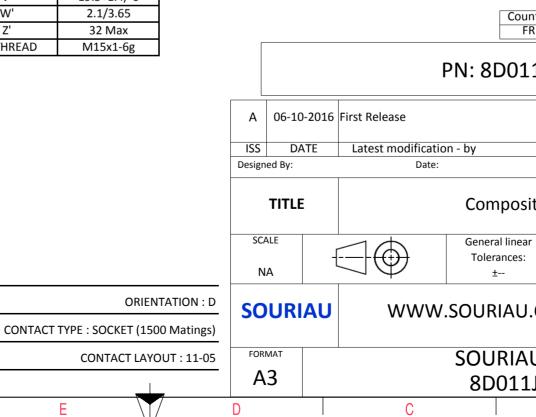

	Φ		A		
		0			4
	6 a	and the second second			
	1	6			
	Č 4				
-		-			
6 5 4					3
IS EXA	AMPLE				
anyı	non-conformit	ty or damage			
whic	ch does not co he Parties or b	mply with	t v		
	on, technical n				
intry R	Jurisd	liction & Cont Not Listed	rol List		2
	J05JD				
	חנכח				
		CUSTOME	R DRAWING	MOD N°	-
ite	e Receptacle 8D series				
ar		NPRDS /	PROJECT		
			59		1
I.CC	COM This document is the property of SOURIAU it must not be reproduced or				
	communicated without permission				
	DRG N° 5JD-C			SHEET 1/2	
	B		A	-	J

r	т	۵	п	m	D	0
		Contact Layout				Panel Cutou
4	×.	$ \begin{array}{c} & & & \\ & $			Ā	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Conta positi ID A B C C D E Shell Arrangement Numb	X-axis Y-axis (mm) (mm) +065 (1.65) +056 (1.42) +.113 (2.87) 065 (1.65) +.000 (0.00) 130 (3.30) 113 (2.87) 065 (1.65) 065 (1.65) +.056 (1.42)	1		¥ 22	
ى	size no. conta 11 -5 5	acts contacts rating location				Dim ØA ØAA R1 ØT
	-					SOURIAU shall not be liable for any
						due to a use of the Products wh the Specifications issued by either of (professional recommendat
N						PN: 8D011
					ISS DA	
					Designed By: TITLE SCALE	
_					NA	General linear Tolerances: ±
					FORMAT A3	SOURIAU 8D011J
l	Н	G	F	E	D	C

