
	Q	н т	m	0





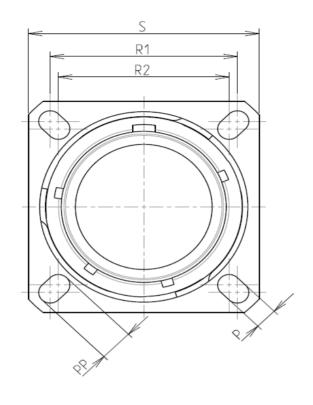

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 17

SHELL TYPE : Square Flange Receptacle

PLATING : Z = Black Zinc Nickel

Н

CONTACT TYPE : Standard Crimp Contact

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium				
-Shell Plating	: Black Zinc Nickel				
-Insulator	: Thermoplastic				
-Contacts	: Copper Alloy				
-Seals & Grommet	: Silicon Elastomer				
-Contact Plating	: Gold over copper Alloy 0.8µm minimum				
-Durability	: 500 Mating cycles				
-Delivered with Souriau contacts and Accessories					
-Temperature Range	: -65℃ to +175℃				
-Salt Spray	: 500 hours				

8D 0

G

17

Ζ

22

S

F

E


Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	26.97
R2	24.61
S	33.3±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M25x1-6g


ORIENTATION : E

CONTACT LAYOUT : 17-22

CONTACT TYPE : SOCKET(500 Matings)

Е



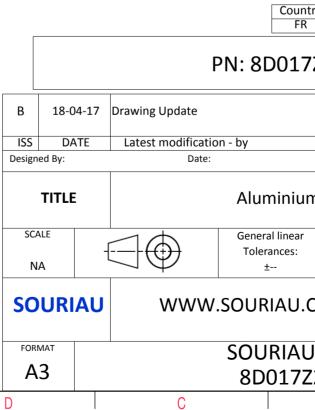

	σ		A			
		l				
		•			4	
A		0			4	
	C G					
Ч						
		1				
	2	7				
S FX4	XAMPLE					
anv	non-conformit	ty or damage				
whic	ch does not co	mply with				
	r of the Parties or by a third party dation, technical notice.)					
untry						
R		Not Listed			2	
7Z22SE						
				MOD N°		
		CUSTOME	R DRAWING			
um	n Receptacle 8D series					
ar	NPRDS / PROJECT					
	859 This document is the property of					
I.CC	.COM SOURIAU it must not be reproduced or					
	communicated without permission					
	DRG N° 2SE-C			1/2		
	B		A		J	

r	Ŧ	G	г П	m		0	
4		Contact Layout 22				SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	Panel Cut
ω	Ctc A B C D	2#12 2#8 Triax 17-22 X Y 0 4.57 6.32 0 0 -4.57 -6.32 0				Max. thickness panel for receptacle:	Type 0: front m m A A 1
	-					SOURIAU shall not be due to a use of the the Specifications issued (professional re	e liable for a Products v d by either ecommend
N					В	PN: 18-04-17 Drawing Update	Coun FR 8D017
						TITLE Aluminiu	
<u> </u>							
					FORMAT A3	8	DURIAU 3D0172
_	Н	G	F	E	D	С	

