


PART NO.		RFU-630	
REV	DESCRIPTION	DWN	DATE
E	UPDATED CONNECTOR DESIGN & SPECS	CZS	10/01/20
			APPROVED
			JDMc

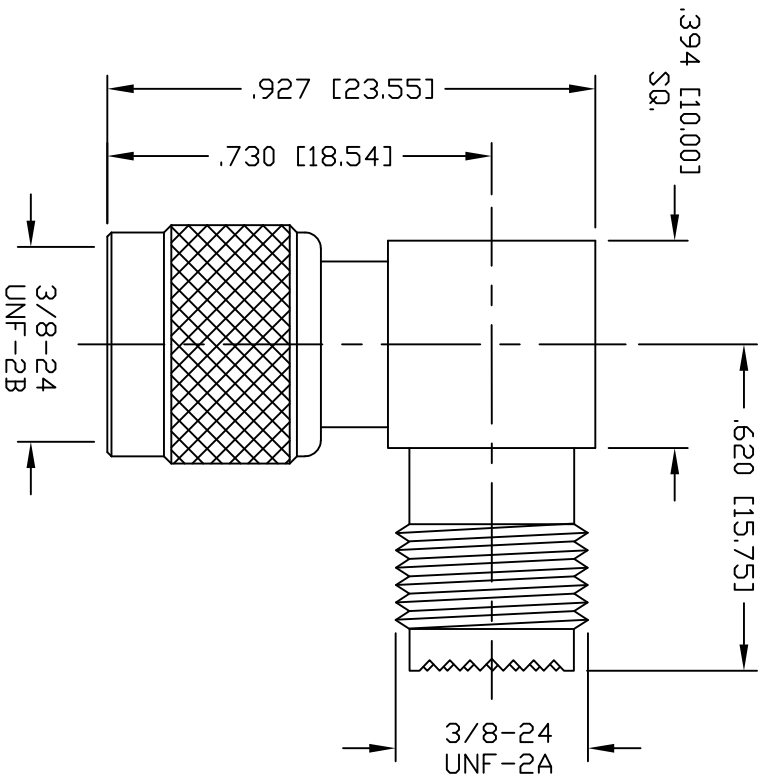

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
 FREQUENCY RANGE: 0-2.5 GHz
 WORKING VOLTAGE: 335 V rms Max. @ Sea Level
 INSULATION RESISTANCE: 5k M Ohms min.
 TEMPERATURE RANGE: -65°C TO 165°C

7	SHELL	1	SHELL	NICKEL
6	INSULATOR	1	PTFE	NATURAL
5	INSULATOR	1	PTFE	NATURAL
4	CONTACT	1	BRASS	GOLD
3	PIN	1	BRASS	GOLD
2	PRESS FIT BODY	1	BRASS	NICKEL
1	BODY	1	BRASS	NICKEL
#	DESCRIPTION	QTY	MATERIAL	FINISH

CUSTOMER
 OUTLINE DRAWING
 ALL DIMENSIONS
 ARE REFERENCE ONLY
 UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN INCHES
 AND [MILLIMETERS]

DRW
 C. ZUNIGA
 CHECKED
 ORG DRAWN
 C. ZUNIGA
 8/20/85

ROHS COMPLIANT

PROPRIETARY AND CONFIDENTIAL
 THIS DRAWING CONTAINS
 INFORMATION PROPRIETARY TO
 RF INDUSTRIES, ANY
 UNAUTHORIZED USE OF THIS
 DRAWING IS EXPRESSLY
 PROHIBITED WITHOUT WRITTEN
 PERMISSION FROM RF
 INDUSTRIES. ANY VIOLATION IS
 PUNISHABLE UNDER U.S.
 COPYRIGHT LAWS.

RF connectors
 DIVISION OF RF INDUSTRIES, LTD. (858) 549-6345 FAX

MINI UHF PLUG TO JACK
 RIGHT ANGLE ADAPTER

RFINDUSTRIES.COM
 7610 MIRAMAR RD.
 SAN DIEGO, CA 92126
 (858) 549-6340
 (858) 549-6345 FAX

CABLE GROUP DWG NO.
 N/A
RFU-630
 REVISION
 E

FORMAT SCALE ENGINEERING ID SHEET 1 OF 1
 A NTS 000000