


LOOSE PIECE		SPECIFICATIONS				
MATERIAL NUMBER	ENGINEERING NUMBER	STUD SIZE	"S" ±.005 [0.13]	"W" ±.013 [0.33]	"C" MIN.	"L" MAX.
190710311	J-685-38X	38	.390 [9.91]	.928 [23.57]	.760 [19.30]	2.610 [66.30]
190710312	J-685-56X	56	.328 [8.33]			
190710313	J-685-76X	76	.453 [11.51]			

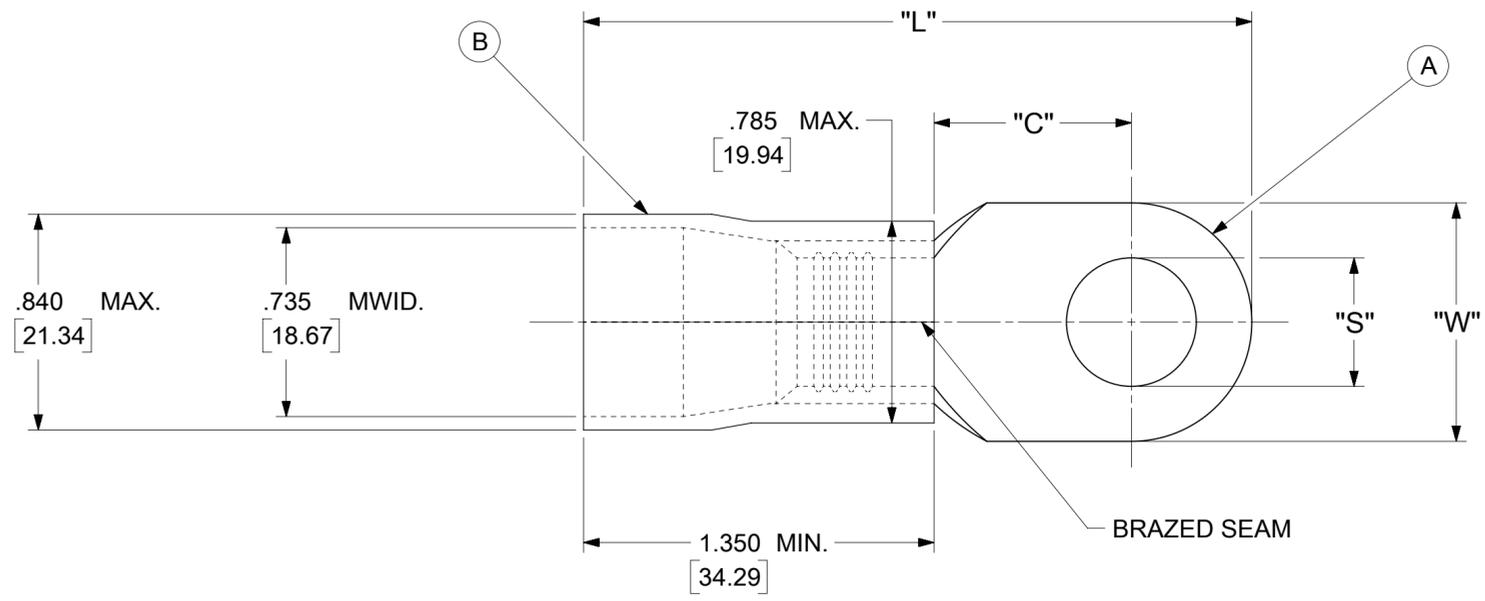

- NOTES:
- MATERIAL:
 - (A). TERMINAL: COPPER (STOCK THICKNESS .083±.003 [2.11])
 - PLATING: ELECTRO-TIN (.0003 MIN.)
 - (B). INSULATION: MOLDED VINYL (YELLOW)
 - MWID: MAXIMUM WIRE INSULATION DIAMETER
 - WIRE SIZE: 2/0 AWG
70 MM²
 - "UL" LISTING #E32244
"CSA" LISTING #18689
 - ALL DIMENSIONS IN INCHES/[MM].
 - PARTS ARE ROHS COMPLIANT.
 - DIMS. SHOWN ARE FOR REFERENCE ONLY.

SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
	DIMENSION UNITS	SCALE		CURRENT REV DESC: MIGRATION TO ECTR/NX	
▽ = 0	INCH/MM	NTS		molex RING BZD INSULKRIMP PRODUCT CUSTOMER DRAWING DOCUMENT NUMBER: 190710311 DOC TYPE: PSD DOC PART: 000 REVISION: A MATERIAL NUMBER: SEE TABLE CUSTOMER: GENERAL MARKET SHEET NUMBER: 1 OF 1	
▽ = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)				
▽ = 0		MM	INCH		
▽ = 0	4 PLACES	± ---	± ---		
▽ = 0	3 PLACES	± ---	± .005		
▽ = 0	2 PLACES	± 0.13	± .01		
▽ = 0	1 PLACE	± 0.25	± ---		
▽ = 0	0 PLACES	± ---	± ---		
▽ = 0	ANGULAR TOL	± 0.5 °		EC NO: 621658 DRWN: ABENJAMINLW 2019/07/26 CHK'D: GROJAS01 2019/07/31 APPR: JMACNEIL 2019/08/05 INITIAL REVISION: DRWN: APPR: JMACNEIL 2019/08/05	
▽ = 0	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES
▽ = 0			C-SIZE	19071	