

TOLERANCE UNLESS OTHERWISE SPECIFIED .X ±0.25 .XX ±0.13 .XXX ±0.05

10.70

5.80

THIS IS A C.A.D. GENERATED DRAWING

DO NOT MAKE MANUAL REVISIONS TO MASTER.




ISSUE NUMBER

(1)



ORIGINAL

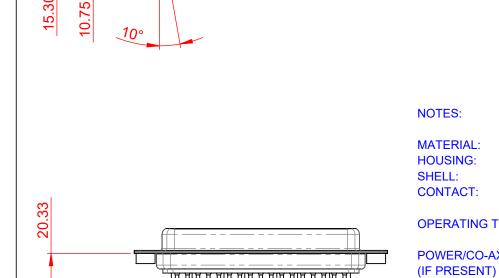

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, 30µ GOLD PLATED


-55°C ~ 125°C **OPERATING TEMPERATURE:**

POWER/CO-AX CONTACT RATING: 10A (CURRENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX.


INSULATOR RESISTANCE: DIELECTRIC WITHSTANDING VOLTAGE:

5000MΩ min.

1000V AC rms



				SW REFERENCE NO.: 630 COMBO ASSEMBLY		
CC	COMBINATION D-SUB		DRAWN: C.B	DATE: JAN. 01/20	19	
			CHECKED:	DATE:		
EDAC INC TORONTO, ONTARIO CANADA	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2	
	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE	DRAWING NUMBER: 630-24W7650-1TA		ISSUE		
YOUR CONNECTION TO QUA	UALITY & SERVICE	MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	PART NUMBER: 630-24	/7650-1TA	1	



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

COMPLIANT

