
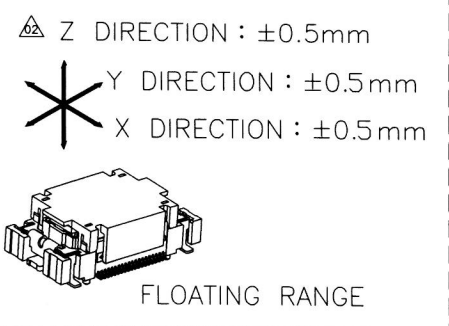








F
E
D
C
B
A

1 2 3 4 5 6 7 8 9

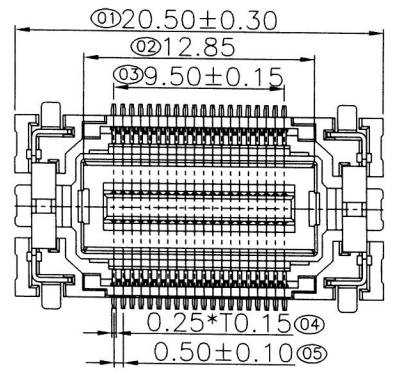

REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01	NEW	BATCH PRODUCTION INITIAL RELEASE.	2021.08.25	劉先平
02	△	产品增加浮动物量说明	2022.09.26	劉先平

Specifications
 Current Rating:0.4Amp
 Insulation Resistance:500M Min.
 Dielectric Withstanding Voltage:250VAC/60S
 Contact Resistance:100m Max.
 Operating Temperature:-40°C to +105°C
 Materials
 Contact Material:Phosphor Bronze
 Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material
 ☆ All materials must meet GREENCONN hazardous substances control standards.
 "★": Critical Characteristics, indicates product characteristics, functionalities, and manufacturing processes regarding to customer's specifications
 "☆": Safety Features indicates product characteristics, functionalities, and manufacturing processes complying to legal regulations stated by local government

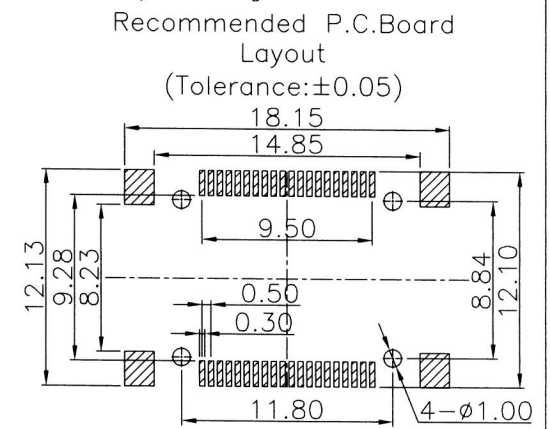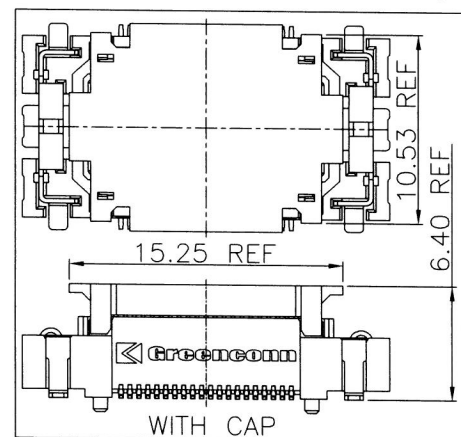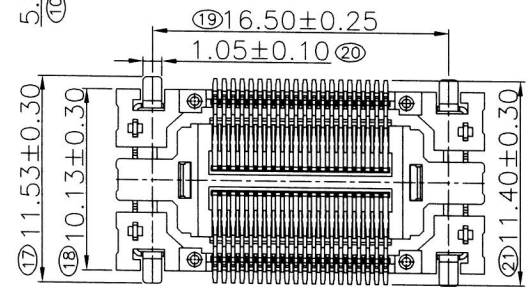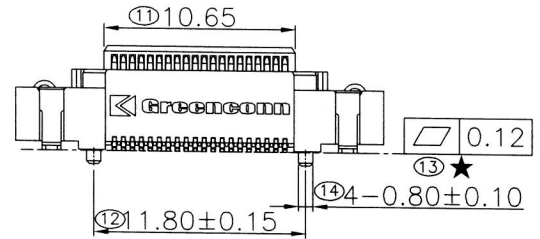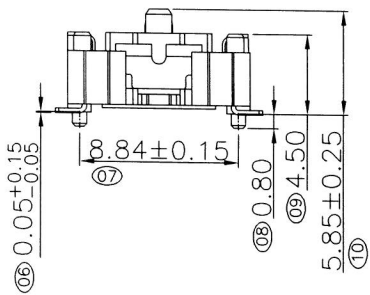

Ordering Information

G BAC229 - XX XX B 001 C 1 N X

No. of Pins per Row: 20
 Standard Plating: 02=Gold Flash
 Color: 1=Black
 Standard Packing: F=CAP+Tape&Reel

Greenconn P/N	Customer	Remarks
GBAC229-2002B001C1NF	XXX	Automotive connector

3RD.ANG PROJ.
 3RD.ANG PROJ.
 PAGE. 1/1

GENERAL TOLERANCE	
X.*±3.0*	X.±0.25
.X*±2.0*	.X±0.20
.XX*±1.0*	.XX±0.13
.XXX*±0.5*	.XXX±0.08

DESIGNED: 劉先平 DATE: 2022.09.26
 CHECKED: 木木木木 DATE: 2022.9.26
 APPROVED: 王王王 DATE: 2022.9.26

DWG. NO. GBAC229-CB1CN
 PART NO. GBAC229-XXXXB001C1NX

TITLE. 0.5mm PITCH BTB FLOATING CONNECTOR

1 2 3 4 5 6 7 8 9

F
E
D
C
B
A