

ITEM	PART#	DESCRIPTION	QTY	UOM
A,B	334810301	MX150 ASSY 1.5 BLD 1X3 BLK A/3	2	PC
C	330001001	MX150 BLD TERM TIN 14AWG D WIND	6	PC
D	884260070	PAPER PRINTED PAPER WHITE (S100X150YAJ)	1	PC

FROM	TO	CABLE PART#	DESCRIPTION	COLOR
A1	B3	100027101	14AWG DISC PVC BK OD 2.4 TXL BALAJI	BLACK
A2	B2	100027101	14AWG DISC PVC BK OD 2.4 TXL BALAJI	BLACK
A3	B1	100027101	14AWG DISC PVC BK OD 2.4 TXL BALAJI	BLACK

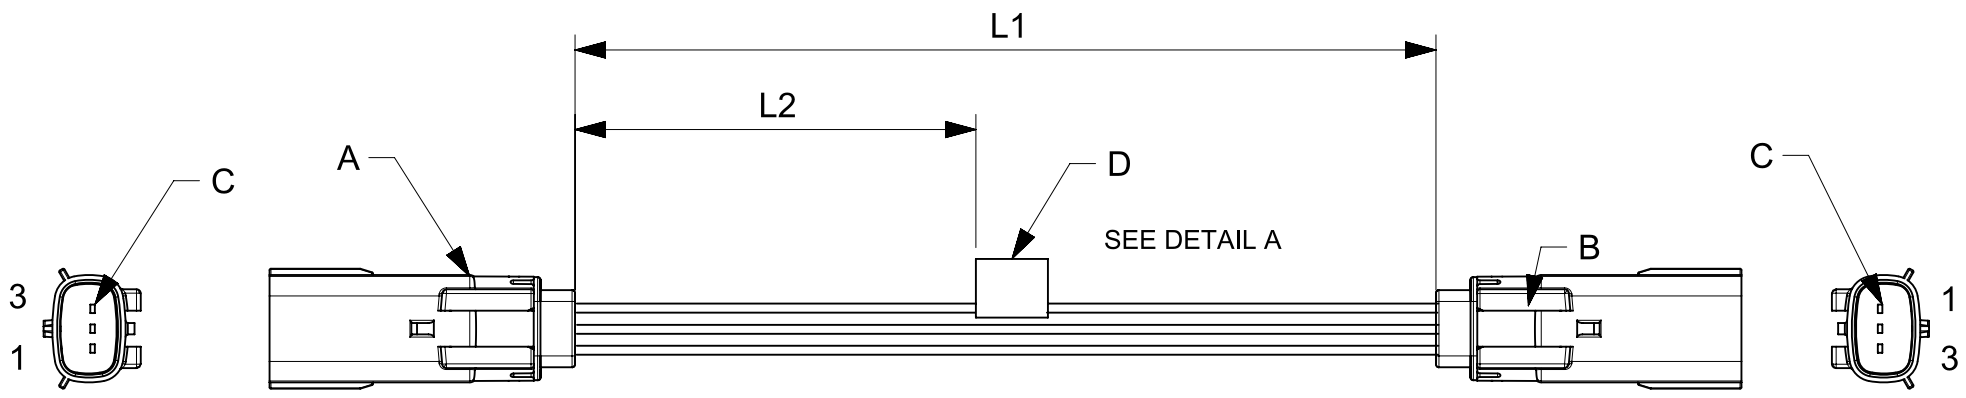


TABLE			
PART NUMBER	L1	L2	TITLE
2162821031	150±8	63 REF	MX150 P-P SR 3ckt 150mm Sn sealed cable
2162821032	300±10	138 REF	MX150 P-P SR 3ckt 300mm Sn sealed cable
2162821033	600±10	288 REF	MX150 P-P SR 3ckt 600mm Sn sealed cable

- NOTES**
1. Connector assembly must pass 100% continuity and polarity test.
 2. Sealing must pass the IP67 rating as defined by product specification.
 3. Connector view shown is from mating side.
 4. Label text must be 2mm max. in height with Arial font.
 5. Label must be wrapped in flag type on a single cable.

MOLEX P/N
MOLEX
BATCH WK/YR
DETAIL A

FUNCTIONAL SYMBOLS $\nabla_A = 0$ $\nabla_E = 0$ $\nabla_P = 0$ DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:		<p>REFER THE TABLE</p> <p>PRODUCT CUSTOMER DRAWING</p>		
	DIMENSION UNITS	SCALE	EC NO: 643544				
	mm	NTS	DRWN: NNANKOLA 2020/06/29				
	GENERAL TOLERANCES (UNLESS SPECIFIED)		CHK'D: SD 2020/08/31				
ANGULAR TOL ± °		APPR: SD 2020/08/31		DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
4 PLACES ±		INITIAL REVISION:		2162821031	PSD	000	A
3 PLACES ±		DRWN: NNANKOLA 2020/06/29					
2 PLACES ±		APPR: SD 2020/08/31					
1 PLACE ±		MATERIAL NUMBER					
0 PLACES ±		CUSTOMER					
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	SHEET NUMBER		
			A4-SIZE	216282	SEE TABLE	GENERAL MARKET	1 OF 1