
THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.







(1)

ORIGINAL

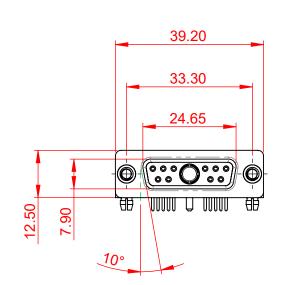







.X ±0.25 .XX ±0.13

.XXX ±0.05


MATERIAL: HOUSING: THERMOPLASTIC POLYESTER, UL94V-0 SHELL: STEEL, TIN PLATED CONTACT: COPPER ALLOY, GOLD FLASH PLATING

OPERATING TEMPERATURE: -55°C ~ 125°C

SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: 10mQ MAX. INSULATOR RESISTANCE: 5000MΩ min. DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC rms


CONTACT CODE 40 POWER CONTACT FOOTPRINT - 13.20mm 40 IS STANDARD AS SHOWN ON SHEETS 3 & 4 CONTACT CODE 50 POWER CONTACT FOOTPRINT - 20.33mm

	COMBINATION D-SUB		SW REFERENCE NO.: 630 COMBO ASSEMBLY		
			DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	4
	YOUR CONNECTION TO QUALITY & SERVICE	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 630-11W	1250-1TB	ISSUE
			PART NUMBER: 630-11W	1250-1TB	1





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

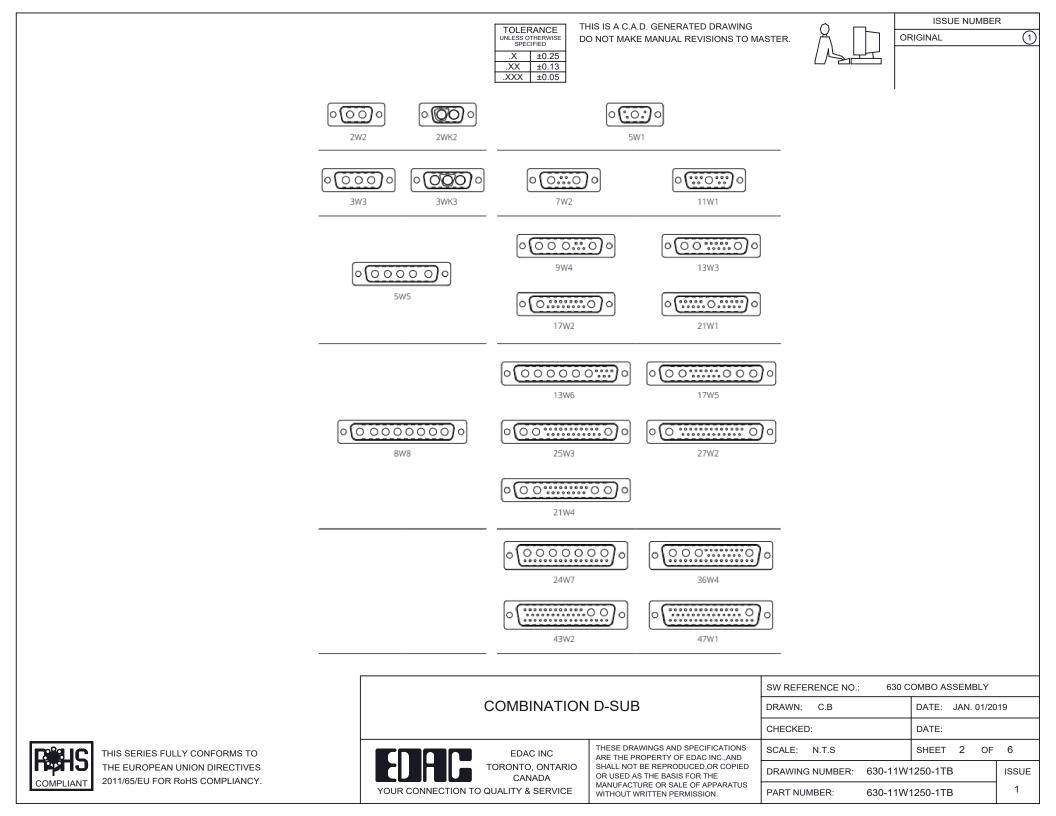



THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER ORIGINAL

 $\overline{(1)}$

2W2 / 2WK2

3W3 / 3WK3

5W1 Male/Female

7W2 Male/Female





5W5 Male



PCB EDGE


8W8 Male



PCB EDGE




PCB EDGE



27W2 Male/Female

21W4 Male/Female




21W1 Male/Female



	COMBINATION D-SUB		SW REFERENCE NO.: 630 COMBO ASSEMBLY		
			DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
	EDAC INC	ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCEO,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS	SCALE: N.T.S	SHEET 3 OF	4
	YOUR CONNECTION TO QUALITY & SERVICE		DRAWING NUMBER: 630-11W	1250-1TB	ISSUE
YOUR CONNECTION T			PART NUMBER: 630-11W	1250-1TB	1


5W5 Female



8W8 Female


CURRENT RATING / ØA

10A / 2.2 20A / 3.3 30A / 3.7 40A / 4.2



17W2 Male/Female

11W1 Male/Female



PCB EDGE



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

63	.50	
.75		
22.83	22.97	
∲-∲-∲ !		

THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.















13W3 Male





25W3 Male






2.77

24.77

PCB EDGE

31.75

36W4 Female

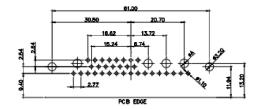

13W6 Male





30.50

2.77

22.16

20.7

13W6 Female

13W3 Female

.X ±0.25 .XX

±0.13 .XXX ±0.05

43W2 Female




17W5 Male






COMBINATION D-SUB




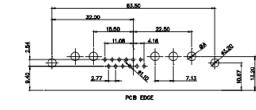

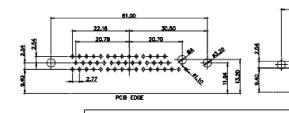

13.72

PCB EDGE

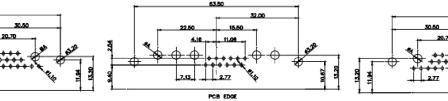

PCB EDGE

22.1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

YOUR CONNECTION TO	EDAC INC TORONTO, ONTARIO CANADA) QUALITY & SERVICE	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC., AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

PCB ELAC			
SW REFERENCE NO.: 6	30 COMBO ASSEMBLY		
DRAWN: C.B	DATE: JAN. 01/2019		
CHECKED:	DATE:		
SCALE: N.T.S	SHEET 4 OF 4		
DRAWING NUMBER: 630-1	1W1250-1TB ISSUE		
PART NUMBER: 630-1	1W1250-1TB 1		