
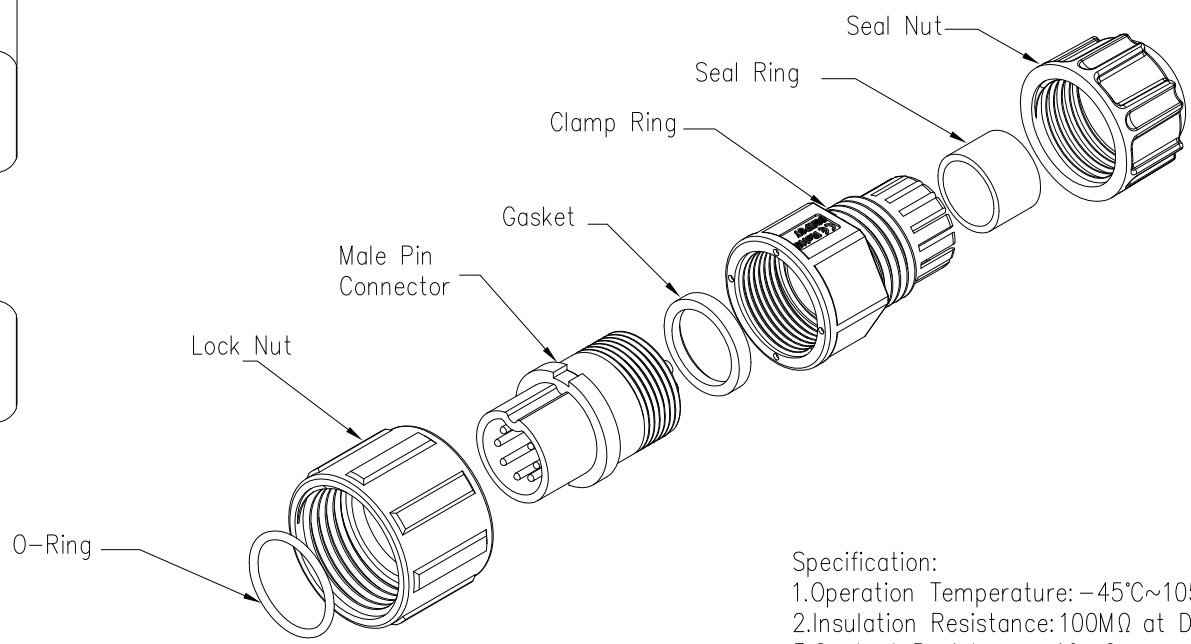
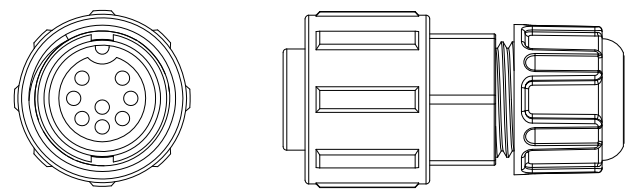



REV.	ECN NO.	DESCRIPTION	SIGN	DATE
C1	N/A	INITIAL DRAWING	Hary	2020/05/04

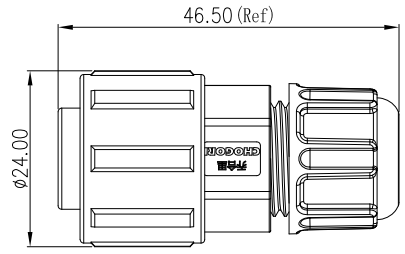

- Specification:
- 1.Operation Temperature: -45°C~105°C.
 - 2.Insulation Resistance:100MΩ at DC500V.
 - 3.Contact Resistance:<10mΩ.
 - 4.Withstand Voltage: 1300V AC
 - 5.Operating Current:5A
 - 6.Operating Voltage:AC 60V
 - 7.Waterproof Rate:IP67 (Mated)
 - 8.Seal Nut:Nylon, Black
 - 9.Seal Ring:Silicon, Black.
 - 10.Clamp Ring:Nylon, Black
 - 11.Gasket:Silicon, Red
 - 12.Lock Nut:Nylon, Black
 - 13.Male Pin:Copper Alloy, Gold Plated
 - 14.Connector:Nylon+GF, Black
 - 15.O-Ring:Silicon, Red
 - 16.RoHS Compliant.
 - 17.Mating Cap:806-00026-01

23XXX111-XX Cable Range OD
 01 OD: φ3.5mm~φ6.5mm
 02 OD: φ6.5mm~φ9.5mm
 Pin Number

7 Pin	8 Pin	9 Pin
P/N: 23007111-XX	P/N: 23008111-XX	P/N: 23009111-XX
Pin Assignments Front View		



UNIT:mm		DESCRIPTION Middle Series Screw Male Plug With Male Pin
TOLERANCE .X ±0.25 .XX ±0.15 .XXX ±0.05 ANGLES ±1°	SCALE: 1:1	SHEET 1 OF 1
REV. C1	SIZE A4	* :Inspection Item



PART NO 23XXX111-XX	DRAWN BY Hary	DATE 2020/05/04
DWG NO	CHECKED BY Mo	DATE 2020/05/04
CUSTOMER	APPROVED BY Panson	DATE 2020/05/04

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSE IS MADE BY YOU TO OTHER THAN CHOGORI PERSONNEL WITHOUT AUTHORIZATION FROM CHOGORI CORP.