



ISSUE NUMBER	
ORIGINAL	

(1)

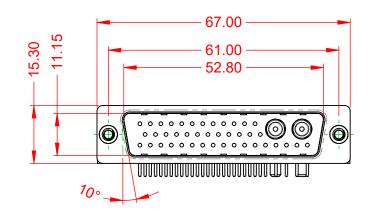



NOTES:


MATERIAL: HOUSING: SHELL: CONTACT:

DIELECTRIC

OPERATING TEMPERATURE:

WITHSTANDING VOLTAGE:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, GOLD FLASH PLATED




POWER/CO-AX CONTACT RATING:20A (CURRENT)(IF PRESENT)SIGNAL CONTACT CURRENT RATING:5A PER CONTACTSIGNAL CONTACT RESISTANCE:10mΩ MAX.INSULATOR RESISTANCE:5000MΩ min.

.XX ±0.13 .XXX ±0.05

> 10mΩ MAX. 5000MΩ min. 1000V AC rms

-55°C ~ 125°C



			SW REFERENCE NO.: 629 COMBO ASSEMBLY		
			DRAWN: C.B	DATE: JAN. 01/201	19
			CHECKED:	DATE:	
D	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC. AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
Y. YOUR CONNECTION TO QUALITY & SERVICE	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE	DRAWING NUMBER: 629-43W2250-2NC		ISSUE	
	YOUR CONNECTION TO QUALITY & SERVICE	CE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	PART NUMBER: 629-43W	2250-2NC	1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

