

Product data sheet

Characteristics

XZCPA1164L10

Pre wired connectors XZ, elbowed female, M12, 5 pins, cable PVC 10 m



Main

| | |
|------------------------------------|----------------------------------|
| Range of Product | Telemecanique Cabling components |
| Accessory / separate part category | Cabling accessory |
| Accessory / Separate Part Type | Pre-wired connectors |
| Series name | Application |

Complementary

| | |
|--------------------------------|---|
| Electrical connection | Elbowed female connector M12, 5 pins (included earth pin) |
| Cable connector fixing | Screw-on |
| Collar material | Stainless steel 316L |
| Status LED | Without |
| Cable length | 32.81 ft (10 m) |
| Cable outer diameter | 0.22 in (5.7 mm) |
| Cable composition | 5 x 0.34 mm ² |
| Wire insulation material | PVC |
| [Ue] rated operational voltage | 60 V AC 75 V DC |
| Line Rated Current | 4 A |
| Contact resistance | 5000 µOhm |
| Minimum insulating resistance | 1 GΩ |
| Net Weight | 1.07 lb(US) (0.485 kg) |

Environment

| | |
|---------------------------------------|-----------------------------------|
| IP Degree of Protection | IP69K |
| Ambient air temperature for operation | -13...185 °F (-25...85 °C) static |
| Ambient Air Temperature for Storage | -31...212 °F (-35...100 °C) |

Ordering and shipping details

| | |
|-----------------------|----------------------|
| Category | 22483-MACHINE CABLES |
| Discount Schedule | DS3 |
| GTIN | 3389119021524 |
| Nbr. of units in pkg. | 1 |
| Package weight(Lbs) | 17.21 oz (488.0 g) |
| Returnability | No |
| Country of origin | PL |

Packing Units

| | |
|------------------------|-----------------|
| Unit Type of Package 1 | PCE |
| Package 1 Height | 1.57 in (4 cm) |
| Package 1 width | 9.84 in (25 cm) |
| Package 1 Length | 9.84 in (25 cm) |


Offer Sustainability

| | |
|----------------------------|---|
| California proposition 65 | WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov |
| REACH Regulation | REACH Declaration |
| REACH free of SVHC | Yes |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| Toxic heavy metal free | Yes |
| Mercury free | Yes |
| RoHS exemption information | Yes |

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|


Dimensions

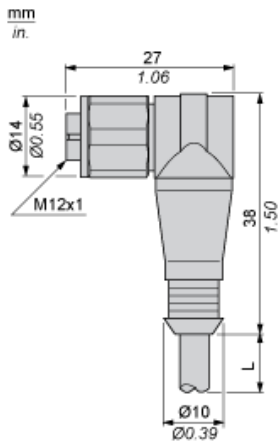

L : Length of cable

Connections and Schemes

Connectors



BU : Blue
BN : Brown
BK : Black
Y/G : Yellow / Green
BK/ Black / White
WH :