


Ŧ	۵	п	m	D	<b>O</b>

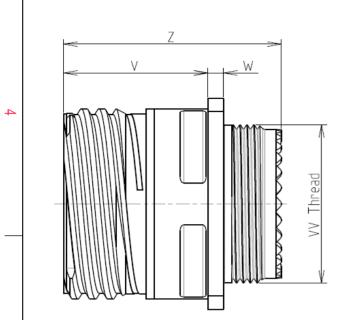

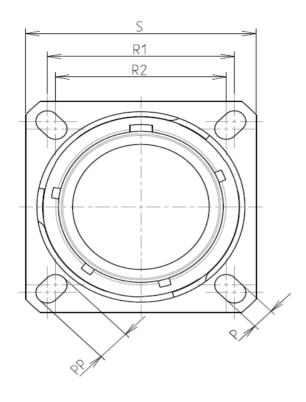



LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 17

PLATING : S = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 $\sim$ 

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Stainless Steel				
-Shell Plating	: Nickel				
-Insulator	: Thermoplastic				
-Contacts	: Copper Alloy				
-Seals & Grommet	: Silicon Elastomer				
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum				
-Durability	: 500 Mating cycles				
-Delivered with Souriau contacts and Accessories					
-Temperature Range	: -65°C to +200°C				

: 500 hours

8D 0

G

17

S

22

Ρ

F

Ν


Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	26.97
R2	24.61
S	33.3±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
/V THREAD	M25x1-6g


ORIENTATION : N

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 17-22



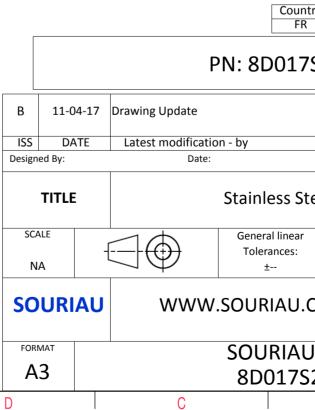

	σ		A			
					4	
SS EXA	AMPLE				3	
s which er of t indatic untry FR	non-conformit ch does not co che Parties or b on, technical no Jurisd	mply with by a third par	ty		2	
		CUSTOME	R DRAWING	MOD N°		
Steel Receptacle 8D series						
ar :	NPRDS / PROJECT 859					
J.CC	DM	it mu:	cument is the pro SOURIAU st not be reproduc iicated without pe	ced or	1	
	DRG N° 2PN-C			SHEET		
52	B		A		J	

	<b>工</b>	۵		П	m	D		0	
4		Contact Layout					SQI	Pa	anel Cut
	Ctc	2#12 2#8 Triax 17-22 X Y						Max. thickness panel for receptacle: Typ	<u>ŏ⊤</u> e 0: front m
ယ	A B C D	0 4.57 6.32 0 0 -4.5 -6.32 0						Dim ØA ØAA R1 ØT	
	-							SOURIAU shall not be lia due to a use of the Pr the Specifications issued b (professional reco	oducts v y either
2								PN: 81	Cour FF D017
						B ISS Designer	DATE	Drawing Update Latest modification - by Date:	
-						SCAL		[	less S ral linear trances: ±
						FORM		SOL 8D	
	Н	G	I	F	E V	D	I	С	I

