

Ŧ	<u>م</u>	П	m	0



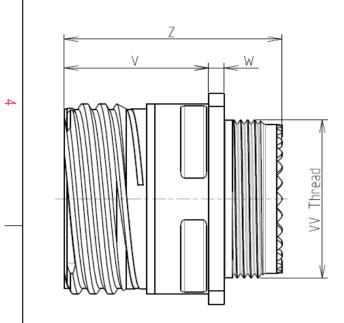

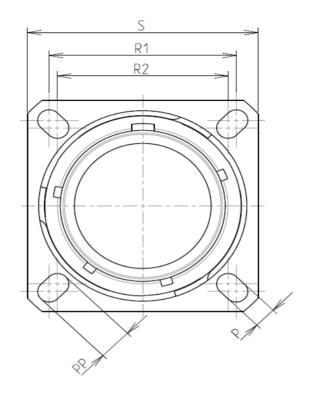

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 17

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Aluminium			
	-Shell Plating	: Olive drab Cadmium			
	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
	-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
	-Durability	: 500 Mating cycles			
	-Delivered with Souriau contacts and Accessories				
	-Temperature Range	65°C to +175°C			
	-Salt Spray	: 500 hours			
L					

: 44.91 g ± 10%

8D 0

G

17

W

75


В


F

В

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
РР	4.93±0.2		
R1	26.97		
R2	24.61		
S	33.3±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M25x1-6g		

Е

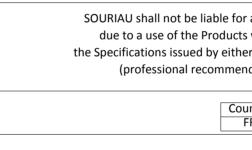

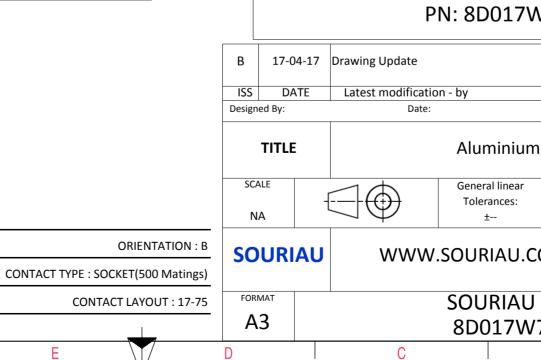

	σ		A		
					4
S EXA	AMPLE				3
s which er of t indatic untry FR		mply with by a third part			2
7W	75BB				
				MOD N°	
		CUSTOME	R DRAWING		
um	m Receptacle 8D series				
ar :	NPRDS / PROJECT 859				
J.CC	This document is the property of SOURIAU it must not be reproduced or communicated without permission				
	DRG N°	<u> </u>		SHEET	
W7	⁷ 5BB-C		A	1/2	J
	D		A		

	Ŧ	ര	וד-	m	D	0		
		Contact Layout 75				Panel Cuto		
4					<u>م</u>			
	Ctc A B	2#8 Triax 17-75 X Y 0 4.75 0 -4.75			¥	Max. thickness panel for receptacle: Type 0: front	t mo	
ω	5	4.75				Dim ØA ØAA R1 ØT		
	\vdash					SOURIAU shall not be liable for due to a use of the Products		
N						the Specifications issued by either of (professional recommendation)		
					B 17-04-: ISS DATE	PN: 8D01	7`	
_					Designed By: TITLE SCALE	Date:		
-					NA SOURIA	Tolerances:	:	
					FORMAT A3	SOURIA 8D017		
L	Н	G	F	E	D	C		

