

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION




20

© COPYRIGHT 20 BY -


ALL RIGHTS RESERVED.

REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
A		INITIAL	03APR2015	DW	CW
B		ECR-15-014907	14OCT2015	DL	CW
C		ECR-21-108559	06AUG2021	BS	CW

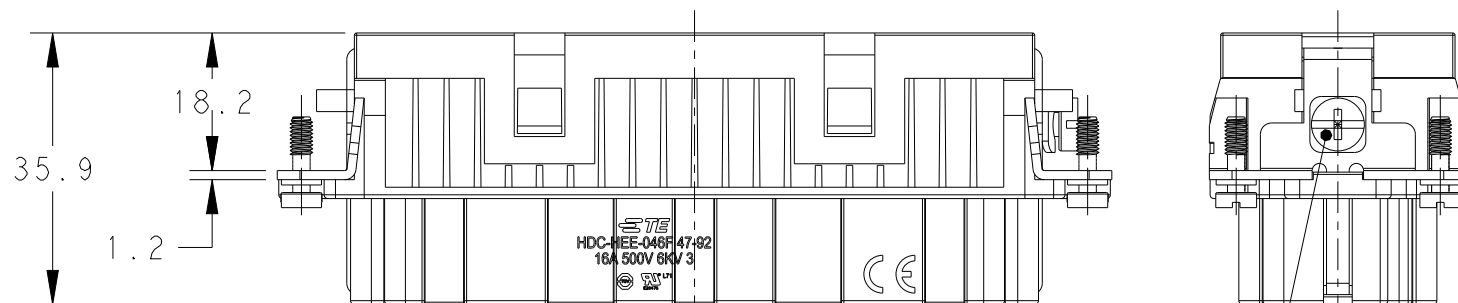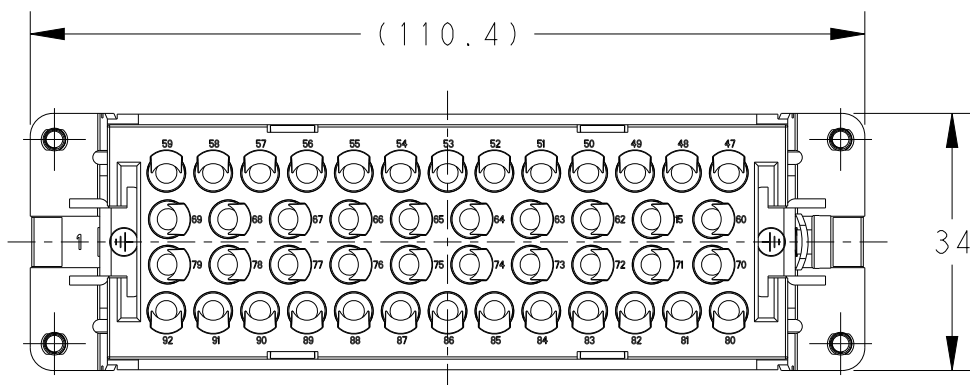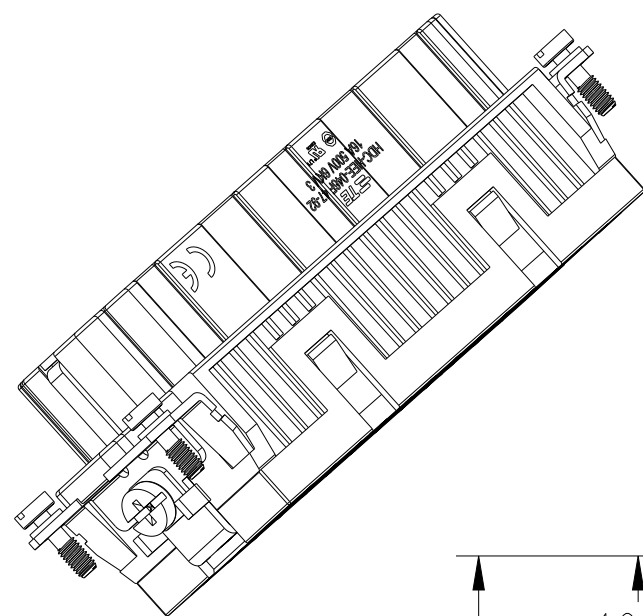

4X M3 THREAD, RECOMMENDED TIGHTENING TORQUE 0.5Nm

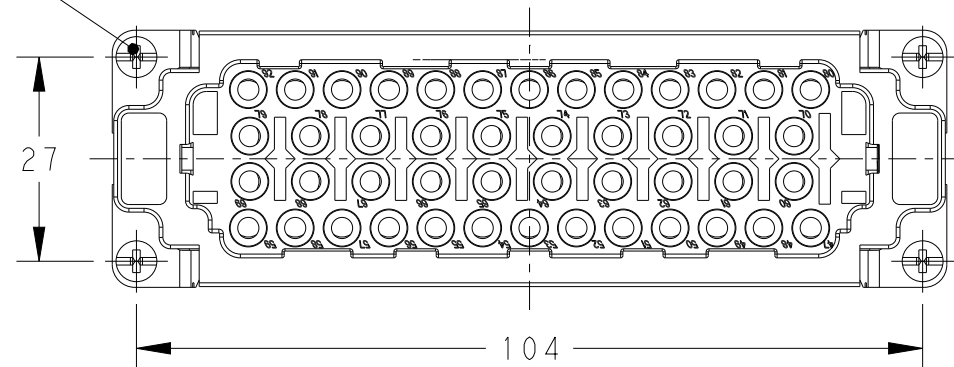

PANEL CUT FOR INSERTS FOR USE WITHOUT HOODS/ HOUSINGS

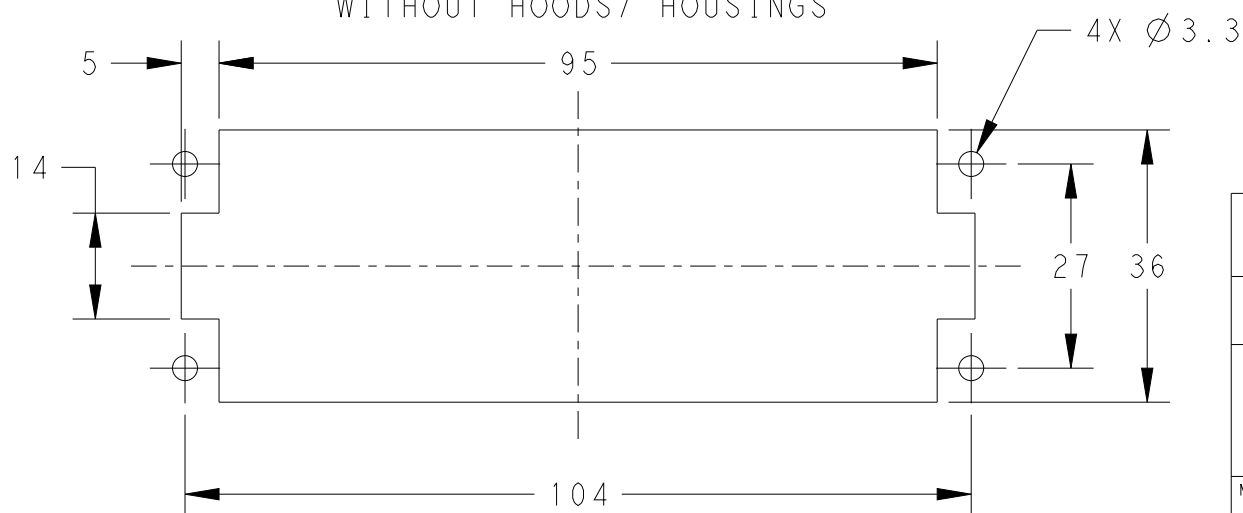


NOTES:

- TECHNICAL CHARACTERISTICS:
 INSULATION MATERIAL: PC
 RATED VOLTAGE: 500V
 RATED CURRENT: 16A
 INSULATION RESISTANCE: $\geq 400M\Omega$
 RATED IMPULSE VOLTAGE: 6KV
 POLLUTION DEGREE: 3
 FLAMMABILITY: UL94V-0
 MATING CYCLES: 500 CYCLES
 WIRE RANGE: 0.14-4 mm² (26-12 AWG)
 CONTACT TYPE: CRIMP CONTACT
- CONTACT NEED TO BE ORDERED SEPARATELY.
 (ORDER No. REFER TO DRAWING: T20300X20XX000)

注释:

- 技术参数:
 绝缘材料: PC
 额定电压: 500V
 额定电流: 16A
 绝缘电阻: $\geq 400M\Omega$
 额定脉冲电压: 6KV
 污染等级: 3
 阻燃等级: UL94V-0
 插拔次数: 500次
 接线范围: 0.14-4 mm² (26-12 AWG)
 接线类型: 冷压接
- 端子需要单独订购。
 (订货号参考图面: T20300X20XX000)

HEE-046-F 47-92	T2050922201-000
DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	03APR2015	 TE Connectivity NAME HEE-046-F 47-92	
DIMENSIONS: mm		CHK	03APR2015		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	03APR2015		
0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±- FINISH		PRODUCT SPEC	108-106137		
MATERIAL	-	APPLICATION SPEC	114-106137	SIZE	A3
		WEIGHT	-	CAGE CODE	00779
		Customer Drawing		DRAWING NO	T2050922201000
				RESTRICTED TO	-
				SCALE	1:1
				SHEET	1 OF 1
				REV	C