



| A | \square |
|---|-----------|
| | |

| ISSUE NUMBER | |
|--------------|-----|
| ORIGINAL | (1) |

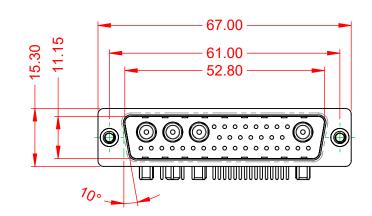




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

OPERATING TEMPERATURE:

WITHSTANDING VOLTAGE:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED




POWER/CO-AX CONTACT RATING:40A (CURRENT)(IF PRESENT)SIGNAL CONTACT CURRENT RATING:5A PER CONTACTSIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX.INSULATOR RESISTANCE:5000MΩ min.DIELECTRICDIELECTRIC

.XX ±0.13 .XXX ±0.05

1000V AC rms

-55°C ~ 125°C



| | COMBINATION D-SUB | | SW REFERENCE NO.: 629 COMBO ASSEMBLY | | |
|------------------|--------------------------------------|---|--------------------------------------|------------------|-------|
| | | | DRAWN: C.B | DATE: JAN. 01/20 | 19 |
| | | | CHECKED: | DATE: | |
| то | EDAC INC | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND | SCALE: (IN C.A.D. 1:1) | SHEET 1 OF | 2 |
| IVES NCY. YOUR (| YOUR CONNECTION TO QUALITY & SERVICE | SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. | DRAWING NUMBER: 629-36W4250-4T2 | | ISSUE |
| | | | PART NUMBER: 629-36W | 4250-4T2 | 1 |



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

