

т	۵	н т	т	D	0



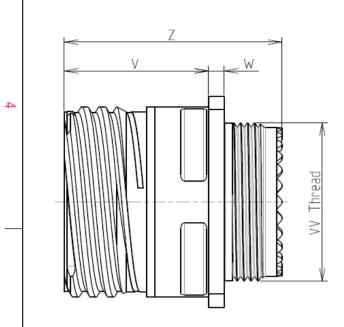



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 11

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

Γ

-Standard : Based on MIL-DTL-38999 Series III

/	-Shell Material	: Aluminium
	-Shell Plating	: Nickel
	-Insulator	: Thermoplastic
	-Contacts	: Copper Alloy
	-Seals & Grommet	: Silicon Elastomer
2	-Contact Plating	: Gold over copper Alloy 0.8µm minimum
	-Durability	: 500 Mating cycles
	-Delivered with Souria	u contacts and Accessories
	-Temperature Range	_: -65°C to +200°C
	-Salt Spray	: 48 hours
	-Mass	: 12.01 g ± 10%

8D 0

G

11

F

01

Ρ

F

Ν

Dim	Nominal
Р	3.25±0.2
РР	4.93±0.2
R1	20.62
R2	18.26
S	26.2±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M15x1-6g


ORIENTATION : N

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 11-01

SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend

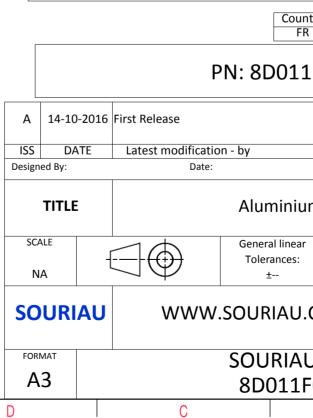

	ω	A		
				4
AS EXA	AMPLE			3
s whic er of t ndatio untry FR	on, technical n	mply with by a third party		2
	1		MOD N°	
customer drawing um Receptacle 8D series				
ar :		NPRDS / PROJECT 859		
J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				1
	DRG N° 1PN-C		SHEET 1/2	
	В	A	<u> </u>	J

r	τ	۵	<u>п</u>	m		0
		Contact Layout				Panel Cutout
4		01			ħ	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Ctc	1#12 11-01 X Y]			
cω	A	0 0				Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of (professional recommendati
N						Country FR
					A 14-10-20	PN: 8D011F
					ISS DATE Designed By:	
					SCALE	Aluminium
					SOURIA	
				_	FORMAT A3	SOURIAU 8D011F0
L	Н	G	F	E	D	C

