
т	۵	н т	m	0





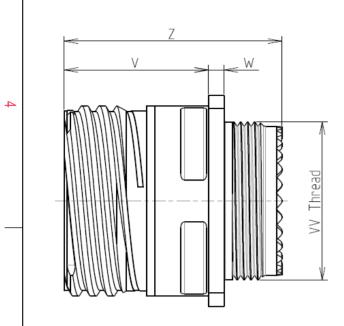

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 11

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Aluminium			
	-Shell Plating	: Nickel			
N	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
	-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
	-Durability	: 500 Mating cycles			
	-Delivered without Souriau contacts				
	-Temperature Range	65°C to +200°C			
	-Salt Spray	: 48 hours			
	-Mass	: 11.22 g ± 10%			
		-			

8D 0

G

11

F

22

Ρ

F

B L

Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M15x1-6g		


Delivered W/O Contacts


CONTACT LAYOUT : 11-22

CONTACT TYPE : PIN(500 Matings)

Е

ORIENTATION : B



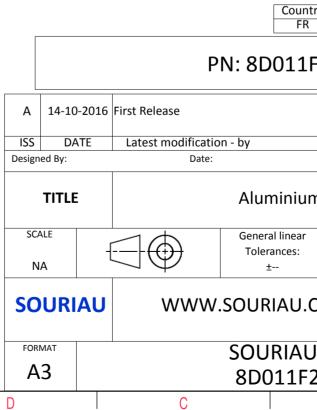

	ω		А		_
					4
AS EXA	AMPLE				3
whice of t datio	non-conformit th does not co he Parties or t on, technical no Jurisd	mply with by a third par otice.) iction & Con	ty]	
[₌] R 1F2	22PBL	Not Listed			2
		CUSTOME	R DRAWING	MOD N°	
um Receptacle 8D series					
ar :	NPRDS / PROJECT 859				
.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
	DRG N° 2PBL-C			SHEET 1/2	
6	B		A		J

		Contact Layout				Panel Cut SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING R1
4	(20 0 ⁴			Σ Σ	
	Ctc A	4#22D 11-22 X Y 1.905 1.905			V	ØT ØT
ى ت	B C D	1.905 -1.905 -1.905 -1.905 -1.905 1.905				Dim ØA ØAA R1 ØT
	-					SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend
2						PN: 8D011
					A 14-10-2 ISS DATI Designed By:	016 First Release E Latest modification - by Date:
-					TITLE SCALE NA	Aluminiu General linear Tolerances: ±
					FORMAT A3	WWW.SOURIAU SOURIA 8D011F
	Н	G	F	E	D	
					V	

Т

ш

т

G

0

