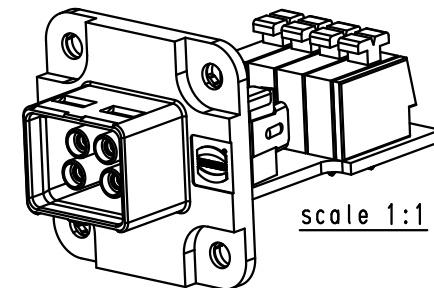




Connector pitches on panel = 35 mm

Receptacle mating face acc. to IEC 61076-3-106 - variant 04

cage clamp connection:
x4 stranded wires 1.5mm²

Screwing with x4 M3 screws with flat washer
Recommended screwing torque for IP67: 0.5 N.m mini



			Mod.	Dot.	Name	 All Dim. in mm Orig. Size DIN A 4	HARTING PushPull Metal Power EasyInstall panel feed-through IP65/67, 4 poles 48V/12A solder contacts, PCB and cage clamp	Maßstab/ Scale
				Detail.	12/09/09			BD
				Insp.	03/02/12	JMV	Blatt/ Page 1/1	
				Stand.				
36318	25/01/12	BD	HARTING EURL F-95972 Paris				Sub.	
35643	12/02/09	BD						