




THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.




ISSUE NUMBER ORIGINAL

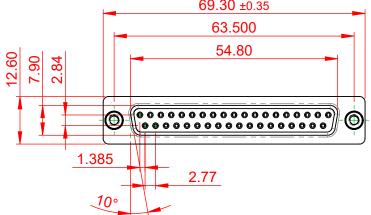

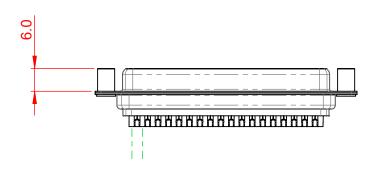





NOTES:

MATERIAL:

HOUSING: THERMOPLASTIC POLYESTER, UL94V-0

SHELL: STEEL, TIN PLATED

CONTACT: COPPER ALLOY, 30µ GOLD PLATED OPERATING TEMPERATURE: -55°C to +85°C

CURRENT RATING: 3A PER CONTACT CONTACT RESISTANCE: 25mΩ MAX. INSULATOR RESISTANCE: $5000M\Omega$ min.

DIELECTRIC

WITHSTANDING VOLTAGE: 1000V AC rms



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.





THESE DRAWI ARE THE PROP SHALL NOT BE OR USED AS T MANUFACTUR WITHOUT WRITTEN PERMISSION.

SW REFERENCE NO.: 628 ASSEMBLY			
DRAWN: C.B	DATE: AUG. 01/2018		
CHECKED:	DATE:		
SCALE: 1:1	SHEET 1 OF 1		
DRAWING NUMBER: 628-037-622-248			

TOR	DRAWN: C.B		DATE:	AUG
	CHECKED:		DATE:	
INGS AND SPECIFICATIONS OPERTY OF EDAC INC.,AND	SCALE: 1:1		SHEET	1
E REPRODUCED,OR COPIED THE BASIS FOR THE	DRAWING NUMBER:	628-037-6	622-248	
RE OR SALE OF APPARATUS ITTEN PERMISSION.	PART NUMBER:	628-037-6	622-248	