

## Data sheet | Item number: 787-1634/000-070


Switched-mode power supply; Classic; 1-phase; 24 VDC output voltage; 20 A output current; TopBoost; DC OK contact

[www.wago.com/787-1634/000-070](http://www.wago.com/787-1634/000-070)



 Picture differs from the item.

Similar to picture

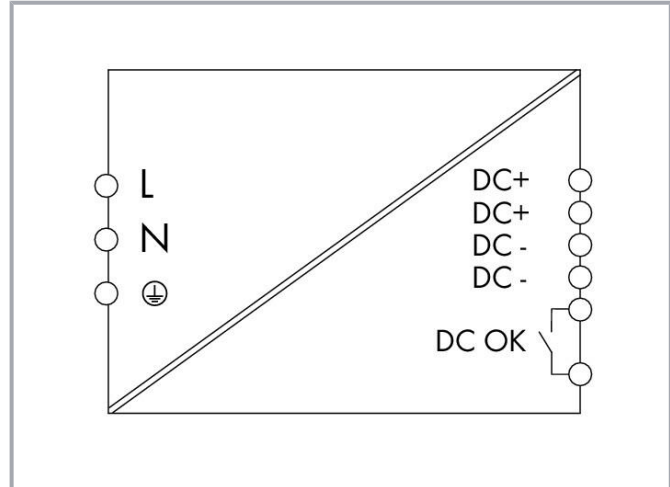

## Item description

### Features:

- Switched-mode power supply
- Natural convection cooling when horizontally mounted
- Encapsulated for use in control cabinets
- DC OK contact
- Suitable for both parallel and series operation
- Electrically isolated output voltage (SELV) per UL 60950-1; PELV per EN 60204
- Coated PCBs (with Bectron PL 1104 or Voltatex 2010), resistant to flowing mixed gas per ISA S71.04:1985, G3 Group A

## Data

### Technical data

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



## Input

Phases	1
Nominal input voltage $U_{i\text{nom}}$	1 x AC 100 ... 240 V
Input voltage range	1 x AC 85 ... 264 V; DC 120 ... 300 V
Input voltage derating	-1.8 %/V (< 105 VAC)
Nominal mains frequency range	44 ... 66 Hz; 0 Hz
Input current $I_i$	$\leq 2.23$ A (230 VAC); $\leq 5.56$ A (100 VAC)
Inrush current	$\leq 30$ A
Power factor correction (PFC)	Active
Mains failure hold-up time	$\geq 20$ ms (230 VAC); $\geq 8$ ms (100 VAC)

## Output

Nominal output voltage $U_{o\text{nom}}$	DC 24 V (SELV)
Output voltage range	DC 23 ... 28.5 V (adjustable)
Nominal output current $I_{o\text{nom}}$	20 A (24 VDC)
Nominal output power	480 W
Residual ripple	$\leq 70$ mV (peak-to-peak)
Current limitation	$1.1 \times I_{o\text{nom}}$ (typ.)
Overload behavior	Constant current

## Signaling and Communication

Signaling	1 x LED DC OK (green)
Operation status indicator	Green LED ( $U_o$ )

## Efficiency/power losses

Power loss $P_l$	$\leq 7.2$ W; $\leq 42.4$ W (230 VAC; nominal load)
Power loss (max.) $P_{l(\text{max})}$	68.3 W (100 VAC / 24 VDC; 20 A)
Efficiency (typ.)	92 %

## Circuit protection

Internal fuse	T 10 A / 250 VAC
Backup fusing (required)	An external DC fuse is required for the DC input voltage.
Backup fusing (recommended)	Circuit breaker: 10 A, 16 A; Tripping characteristic: B or C

Subject to changes. Please also observe the further product documentation!

## Safety and protection

Isolation voltage (sec.-PE)	DC 0.7 kV
Protection class	I
Protection type	IP20; per EN 60529
Overvoltage category	II
Pollution degree	2
Transient suppression (primary)	Varistor
Overvoltage protection; secondary	Internal protective circuit ≤ 40 VDC (in the event of a fault)
Short-circuit-protected	Yes
Open-circuit-proof	Yes
Parallel operation	Yes
Series operation	Yes
MTBF	> 500,000 h (per IEC 61709)

## Connection data

Connection type 1	Input/signaling
Connection technology	CAGE CLAMP®
WAGO connector	WAGO 721 Series
Solid conductor	0.08 ... 2.5 mm <sup>2</sup> / 28 ... 12 AWG
Fine-stranded conductor	0.08 ... 2.5 mm <sup>2</sup> / 28 ... 12 AWG
Strip length	8 ... 9 mm / 0.31 ... 0.35 inches
Connection type 2	Output
Connection technology 2	Push-in CAGE CLAMP®
WAGO connector 2	WAGO 831 Series
Solid conductor 2	0.5 ... 10 mm <sup>2</sup> / 20 ... 8 AWG
Fine-stranded conductor 2	0.5 ... 10 mm <sup>2</sup> / 20 ... 8 AWG
Strip length 2	13 ... 15 mm / 0.51 ... 0.59 inches

## Physical data

Width	95 mm / 3.74 inches
Height	127 mm / 5 inches
Depth from upper-edge of DIN-rail	170 mm / 6.693 inches

Subject to changes. Please also observe the further product documentation!



## Mechanical Data

Mounting type	DIN-35 rail
---------------	-------------

## Material Data

Fire load	0.797 MJ
Weight	1600 g

## Environmental requirements

Ambient temperature (operation)	-25 ... +70 °C (Device starts at -40 °C (type-tested))
Ambient temperature (storage)	-25 ... +85 °C
Relative humidity	5 ... 96 % (no condensation permissible)
Derating	-5 %/K (> 60 °C, 196... 264 VAC); -2.5 %/K (> 50 °C, 85 ... 195 VAC)

## Standards and specifications

Conformity marking	CE
Standards/specifications	EN 61010-1 EN 61010-2-201 EN 61204-3 UL 60950-1 UL 508

## Commercial data

ETIM 8.0	EC002540
ETIM 7.0	EC002540
PU (SPU)	1 pcs
Packaging type	box
Country of origin	DE
GTIN	4055143786331
Customs tariff number	85044083900

## Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

## Approvals / Certificates

### General approvals

Subject to changes. Please also observe the further product documentation!



Logo	Approval	Additional Approval Text	Certificate name
	EAC Brjansker Zertifizierungsstelle	TP TC 004/2011, TP TC 020/2011	EAC RU C-DE.AM02.B. 00089_19

#### Declarations of conformity and manufacturer's declarations

Logo	Approval	Additional Approval Text	Certificate name
	EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-

#### Optional accessories

##### Tool

Operating tool



Item no.: 210-769  
SCREWDRIVER; green

[www.wago.com/210-769](http://www.wago.com/210-769)

##### Mounting adapter

DIN-rail adapter



Item no.: 787-897/000-010  
Carrier rail adapter made of zinc die-cast; horizontal mounting of 787-16xx (TS35)

[www.wago.com/787-897/000-010](http://www.wago.com/787-897/000-010)

#### Downloads

##### Documentation

##### Instruction Leaflet

Primär getaktete Stromversorgung; Classic; 1-phasig; Ausgangsspannung DC 24 V; Ausgangsstrom 10/20 A; TopBoost; DC-OK-Kontakt	24.07.2017 2022 Mar 4	pdf 1.7 MB	Download
---	--------------------------	---------------	----------

##### Additional Information

Disposal and Recycling Electrical and electronic equipment, Batteries, Packaging	V 1.1.0 2022 Aug 18	pdf 2.2 MB	Download
---	------------------------	---------------	----------

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



## Engineering-Software

### Configuration and Commissioning Software

WAGO Line Length Calculation	1.3.5	exe	Download
Die WAGO Leitungslaengenrechnung hilft bei der Planung der sekundärseitigen Absicherung von Leitungen an WAGO Stromversorgungen Pro (787-8xx) und Classic (787-16xx). Nach Auswahl eines Netzgerätes kann der gewünschte Leitungsquerschnitt und der zugehörige Leitungsschutzschalter ausgewählt werden. Das Software-Werkzeug berechnet dann die maximale Leitungslänge, bei der die Absicherung unter Berücksichtigung der Leitungs- und Übergangswiderstände ordnungsgemäß funktioniert. Die Auswahl einer Grundlast kann vom Anwender vorgenommen werden.	2019 Dec 9	337.4 kB	

## Environmental Product Compliance

### Compliance Search

Environmental Product Compliance 787-1634/000-070	URL	Download
Switched-mode power supply; Classic; 1-phase; 24 VDC output voltage; 20 A output current; TopBoost; DC OK contact		

## Installation Notes

### Product family

#### Classic

EPSITRON® CLASSIC POWER: The Robust Power Supply – with Integrated TopBoost (Optional)

[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!