<u> </u>	دی ا	 111	







Keying Shown as example

## CHARACTERISTICS

ယ

 $\sim$ 

-Mass


-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium	
-Shell Plating	: Olive drab Cadmium	
-Insulator	: Thermoplastic	
-Contacts	: Copper Alloy	
-Seals & Grommet	: Silicon Elastomer	
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum	
-Durability	: 500 Mating cycles	
-Delivered with Souriau contacts and Accessories		
-Temperature Range	: -65°C to +175°C	
-Salt Spray	: 500 hours	

: 14.89 g ± 10%

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	20.62
R2	18.26
S	26.2±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M15x1-6g

due to a use of the Products the Specifications issued by either (professional recommend Cour FF PN: 8D011 08-10-2016 First Release А DATE Latest modification - by ISS Designed By: Date:

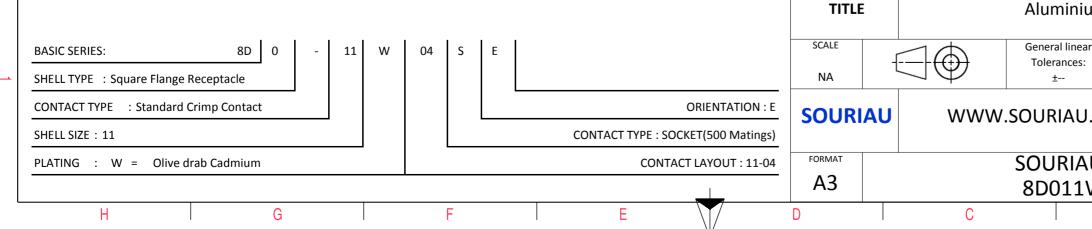

0		σ		A		1
			•			4
LAY	YOUT SHOWN AS EXA	MPLE				3
SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) Country Jurisdiction & Control List FR Not Listed						2
PN: 8D011W04SE						
rst Release Latest modificatio	n - by				MOD N°	
Date:			CUSTOM	R DRAWING		
Aluminium Receptacle 8D series						
$] \bigoplus$	General linear Tolerances: ±			/ PROJECT <b>859</b>		1
WWW.SOURIAU.COM       This document is the property of SOURIAU         it must not be reproduced or communicated without permission						
SOURIAU DRG N° 8D011W04SE-C			SHEET			
С		B		A	-, -	J

	<b>工</b>	۵	п П	m	D	0	
		Contact Layout					Panel Cutou
4	-×	$ \begin{array}{ccc} \bullet & \bullet \\ \bullet & $				SQUARE FLANGE RECEPTACLE (TYPE REAR MOUNTING	0)
	Conta positi ID A B C D Shell Arrangement Numt size no. 11 -4 4	on X-axis Y-axis (mm) (mm) +.065 (1.65) +.065 (1.65) +.065 (1.65)065 (1.65) 065 (1.65)065 (1.65) 065 (1.65) +.065 (1.65) 065 (1.65) +.065 (1.65) 065 (1.65)065 (1.65)	]				ØT
ى						ý Ø	im ðA AA R1 ðT
						SOURIAU shall not b due to a use of th the Specifications issu (professional	e Products wh ed by either of
N							Countr FR
					A 08-1	PN:	8D011V
					ISS E Designed By:	DATE Latest modification - b Date:	У
					тіті		Aluminium
<b></b>					SCALE NA		General linear Tolerances: ±
					SOUR	WWW.SO	URIAU.C
				_	FORMAT A3		OURIAU 8D011W
l	Н	G	F	E	D	С	

