
工	G	нт – – – – – – – – – – – – – – – – – – –	m	0







LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 21

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

ł	-Shell Material	: Aluminium		
	-Shell Plating	: Olive drab Cadmium		
	-Insulator	: Thermoplastic		
	-Contacts	: Copper Alloy		
	-Seals & Grommet	: Silicon Elastomer		
	-Contact Plating	: Gold over copper Alloy 0.8µm minimum		
	-Durability	: 500 Mating cycles		
	-Delivered with Souriau contacts and Accessories			
	-Temperature Range	_∶ -65°C to +175°C		
	-Salt Spray	: 500 hours		

: 64.36 g ± 10%

8D 0

G

21

W

41

В


F

Ν

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	31.75		
R2	29.36		
S	39.7±0.3		
V	20.07+0/-1.25		
W	2.1/3.2		
Z	31.5 Max		
VV THREAD	M31x1-6g		

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

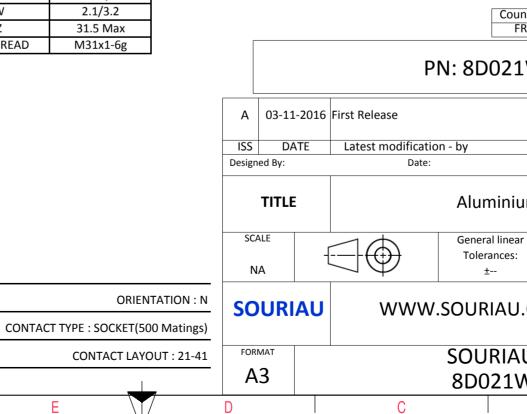

σ		A			
				4	
AS EXAMPLE				3	
FR	mply with by a third party			2	
1W41BN					
			MOD N°		
	CUSTOMER DRAWING				
um Receptac					
ar :	NPRDS / F 85			_	
.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				1	
U DRG N°	1		SHEET		
W41BN-C		A	1/2	J	
2					

ſ	Ξ	۵	IL	т		0	
		Contact Layout				Pa	anel Cutout
4	<	31° 23 23° 23° 41'				SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	2
					¥	ØA	<u>ðī _</u>
ω	Shell Arrangement Numb size no. cont 21 -41 4:	acts contacts rating location				Dim ØA ØAA R1 ØT	
	-						
	.					SOURIAU shall not be lia due to a use of the Pr the Specifications issued b (professional reco	oducts whi
N							Country FR
						PN: 80	0021W
						116 First Release	
					ISS DATE Designed By:	Latest modification - by Date:	
					TITLE	Alu	minium
_					SCALE NA		ral linear erances: ±
					SOURIA	U WWW.SOU	RIAU.CO
					FORMAT A3		JRIAU 021W4
l	Н	G	F	E	D	C C	

