
<b>ک</b> ا			0	Φ		
Image: state stat	ØS					_
			LAYOUT SHO	WN AS EXAMPLE		
<ul> <li>CHARACTERISTICS</li> <li>-Standard : Based on MIL-DTL-38999 Series III</li> <li>-Shell Material : Composite</li> <li>-Shell Plating : Olive drab Cadmium</li> <li>-Insulator : Thermoplastic</li> <li>-Contacts : Copper Alloy</li> <li>-Seals &amp; Grommet : Silicon Elastomer</li> <li>-Contact Plating : Gold over copper Alloy 0.8µm minimum</li> <li>-Durability : 500 Mating cycles</li> <li>-Delivered with Souriau contacts and Accessories</li> <li>-Temperature Range : -65°C to +175°C</li> <li>Selt Sereu: : 2000 hours</li> </ul>	Keying Shown as exampleConnector dimensionDimNominalØS44.9 MaxZ'31.5 MaxVV THREADM34x1-6g	A 06-10-2016	due to a use of the Pro the Specifications issued by (professional reco PN: 8	mmendation, technical notic	ly with a third party	
-Salt Spray : 2000 hours		ISS DATE	Latest modification - by		MOD N	<u>۱</u> ۰
		TITLE			CUSTOMER DRAWING	
BASIC SERIES: 8D 5 - 23 SHELL TYPE : Plug with RFI Shielding CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 23				al linear ances: :	NPRDS / PROJECT <b>859</b> This document is the property of SOURIAU it must not be reproduced or	_
PLATING : J = Olive drab Cadmium	CONTACT TYPE : SOCKET (1500 M CONTACT LAYOUT			RIAU DRG N° 523J55JB-C	communicated without permission SHEET 1/2	
H G	F E	D	C	B	A	

ſ	Ξ	G	г П	m	D	0	
		Contact Layout					
4	.x	$\begin{array}{c} \begin{array}{c} \begin{array}{c} \begin{array}{c} \begin{array}{c} \begin{array}{c} \begin{array}{c} \begin{array}{c} $					
	position ID         X-axis (mm)           A         +.112 (2.84)           B         +.225 (5.72)           C         +.336 (8.53)           D         +.450 (11.43)           F         +.450 (11.43)           F         +.450 (11.43)           G         +.336 (8.53)           H         +.225 (5.72)           J         +.112 (2.84)	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$					
ω	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	+.000 (0.00) <u>u</u> +.112 (2.84)195 (4.95)					
	Shell Arrangement N size no. ( 23 -55	lumber of Size Service Contact Supersede contacts contacts rating location 55 20 I All				SOURIAU shall not be lial due to a use of the Pro the Specifications issued by (professional reco	oducts wl y either o
N						PN: 8	Countr FR
					A 06-10-20 ISS DATE Designed By:	16 First Release	
					SCALE	Gener Toler	Compo ral linear rances:
					SOURIA		± RIAU.C
					FORMAT A3		JRIAU 0523J
l	Н	G	F	E	D	C C	

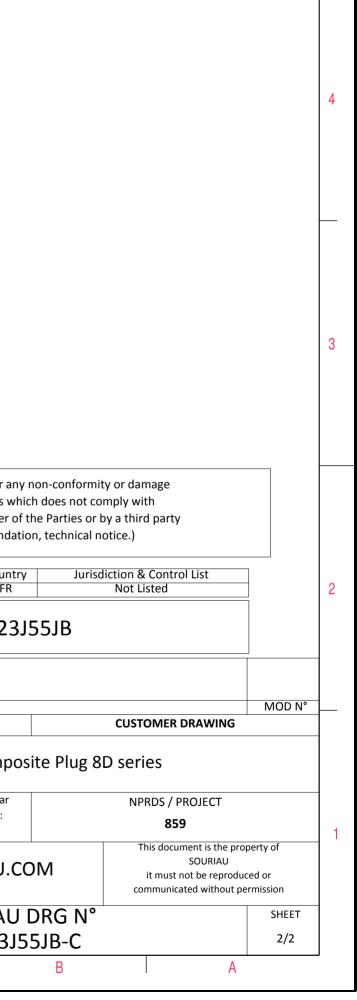

 $\triangleright$ 

σ