



(1)

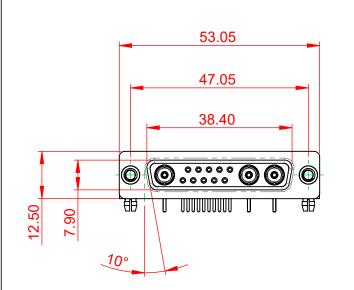




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:	THERMOPLASTIC POLYESTER, I STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH P
OPERATING TEMPERATURE:	-55°C ~ 125°C

POWER/CO-AX CONTACT RATING: 75Ω (IMPEDANCE) (IF PRESENT)

SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX.


INSULATOR RESISTANCE: DIELECTRIC WITHSTANDING VOLTAGE:



COMBINATION D-SUB		SW REFERENCE NO.: 630 COMBO ASSEMBLY		
		DRAWN: C.B	DATE: JAN. 01/20	19
		CHECKED:	DATE:	
	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC., AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
TORONTO, ONTARIO CANADA	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE	DRAWING NUMBER: 630-13W3240-7TB ISS		ISSUE
YOUR CONNECTION TO QUALITY & SERVICE	MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	PART NUMBER: 630-13W	3240-7TB	1

5000MΩ min.

1000V AC rms

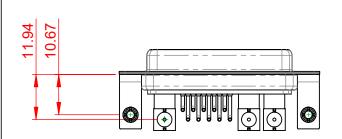

COMPLIANT

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

.XX ±0.13

.XXX ±0.05

UL94V-0 PLATED

