MI DRG. NO.	6924-12D	REV.
6924–12		D

TUNING ELEMENT

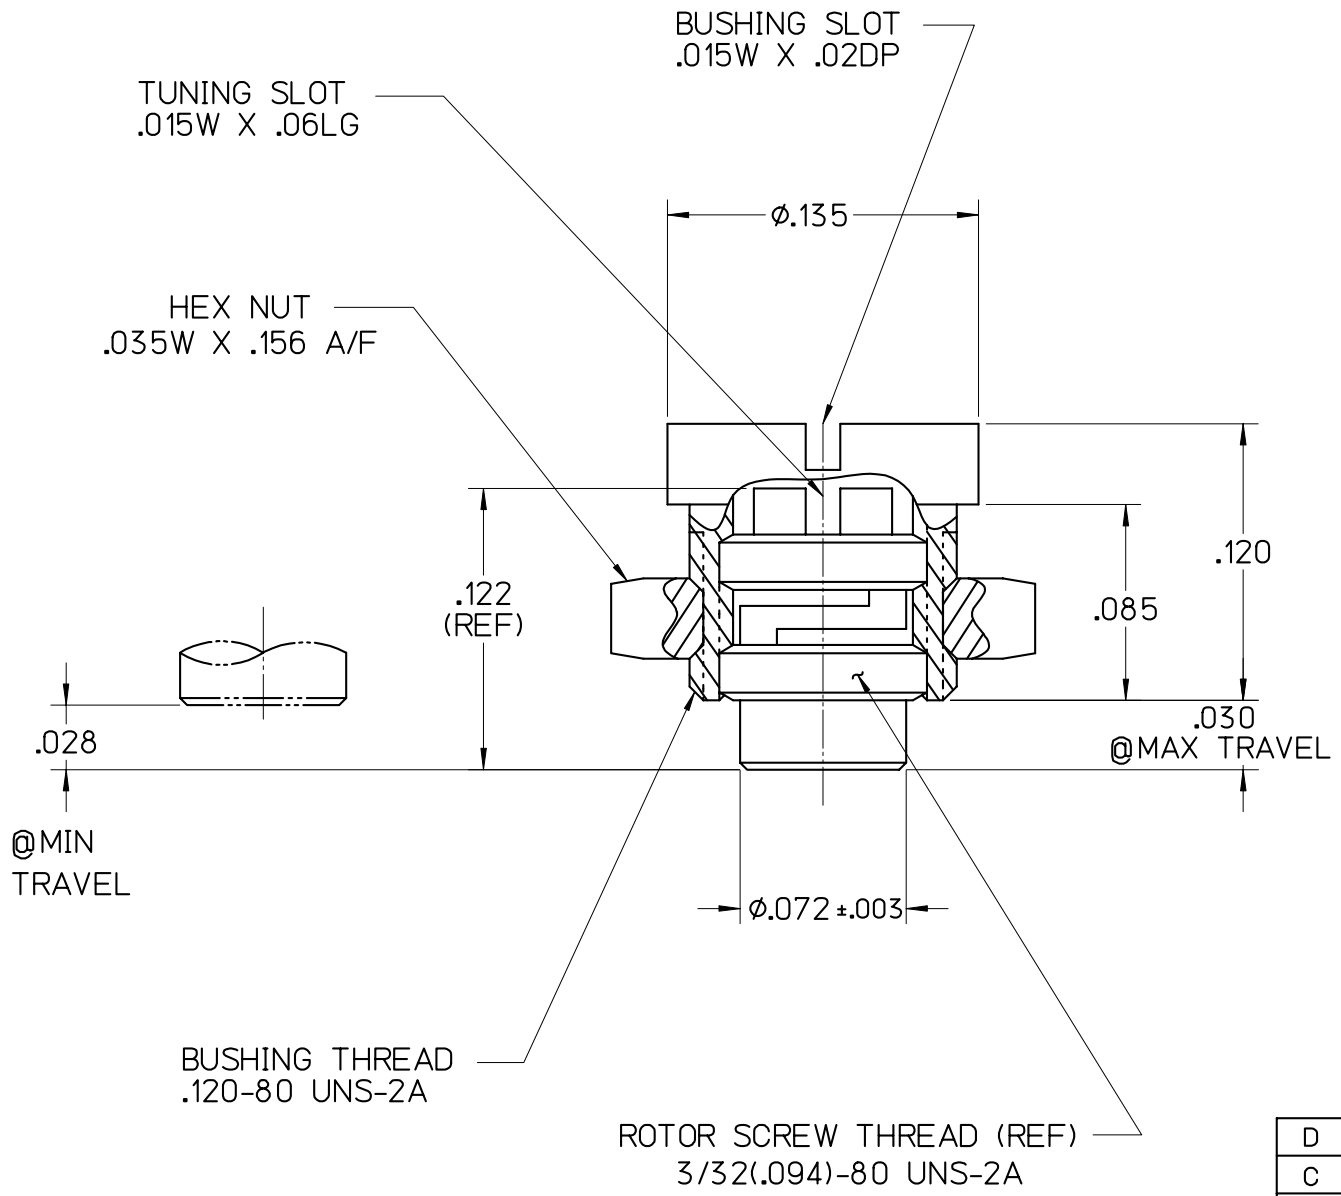

SPECIFICATIONS		FILE: AIROUT
LOW CONTACT RESISTANCE		< 0.01 OHMS
ROTATIONAL LIFE		> 1000 REVOLUTIONS
TORQUE	TUNING	0.3 TO 3.0 OZ. IN.
	NUT MOUNTING	10 OZ. IN. MAX
MOUNTING	CLEARANCE HOLE	Ø .125 / .123
	THREADED HOLE	JMC TAP P/N 7060 (.120-80 UNS-2)
CONCENTRICITY		WITHIN .002 T.I.R.
BRASS STRUCTURE		

APPLICATIONS:
FOR HIGH Q VARIABLE REACTANCE TUNING OF MICROWAVE CAVITIES, FILTERS, AND OTHER RESONANT STRUCTURES.

LEVEL	DATE	DRN.	CHK.	APP.	ECN
D	01/10/02	MLD	TAM	JHT	020-001
C	01/02/02	MLD	TAM	JHT	010-134
B	02/02/00	MLD	-	-	000-041

REVISIONS

JOHANSON MANUFACTURING CORPORATION
ROCKAWAY VALLEY ROAD, BOONTON, N.J. 07005 (973)334-2676 FAX (973)334-2954
ELECTRONIC ACCURACY THROUGH MECHANICAL PRECISION

DRN.	CHK.	APP.	SCALE
MLD	RJV	WEH	12"=1"
DATE 02/02/00	DATE 02/04/00	DATE 02/08/00	.XX ± .015 .XXX ± .005

PROPRIETARY INFORMATION CONTAINED NOT TO BE USED WITHOUT JOHANSON MANUFACTURING CORPORATION APPROVAL