
	т (<u></u> п		C				
LAYOUT SHOWN AS EXAMPLE Keying Shown as example CHARACTERISTICS Shelf Matching Sked on Millor 1-38999 Series III Shelf Matching X: Rived Shelf Matching X: Rived Rived Matching Series Soutact Plotting X: Rived							
Schutzersteil Schutzersteil <td< td=""><td></td><td></td><td></td><td></td><td></td><td></td><td></td></td<>							
CHARACTERISTICS Schardard: Based on MIL-DT: 38999 Series III Schardard: Based on MIL-DT: 38999 Series III Schardard: Based on MIL-DT: 38999 Series III Schardard: Flatting Schardard: Based on MIL-DT: 38999 Series III Schardard: Based on MIL-DT: 38999 Series III Schardard: Flatting Schardard: Based on MIL-DT: 38999 Series III Schardard: Schardar				LAYOUT SHOWN AS EXAM	1PLE		
- Standard : Based on MIL-DT-38999 Series III Solumeted outminum - Shell Material : Aluminium - Shell Material : Aluminium - Shell Material : Nickel - Insulator : Research - Shell Material : Nickel - Insulator : Research - Contacts : Copper Alloy - Seandard : Based on MIL-DT-38999 Series III : Dimeted outminud - Standard : Based on MIL-DT-38999 Series III : Dimeted outminud - Standard : Based on MIL-DT-38999 Series III : Dimeted outminud - Standard : Based on MIL-DT-38999 Series III : Dimeted outminud - Source Vision Elastomer : Contact Nating cycles : Dimeted outminud - Our ability : Solution Elastomer : Dimeted outminud : Dimeted outminud - Our ability : Solution Elastomer : Dimeted outminud : Dimeted outminud : Dimeted outminud - Our ability : Solution Elastomer : Dimeted outminud - Our ability : Solution Elastomer : Dimeted outminud : Dimeted outminud : Dimeted outminud : Dimeted outminud	Keying Shown as example						
Shell Material Aluminium Shell Material Aluminium Shell Material Nickel -insulator Thermoplastic -contacts Copper Alloy Seak & Grommet Silcon flastomer -contact Plating Gold over copper Alloy 0.8µm minimum -Ourability S00 Mating cycles -Derivered without Sourciau contacts Physical Control List -Temperature Range -65°C to 20°C C -sait Spray 48 hours -Mass :13.99 g ± 10% BASIC SERIES: 8D 1 SHELT TYPE F 02 PLATING F Nickel CONTACT TYPE SOURIAU DRG N° SURMAL Shallong Inst not be represented to the product of support of suppersent of suppersent of support support support of support of support support of supp	CHARACTERISTICS Connector dim	nension					
Shell Material Aufminum Z 31 Max SOURIAU shall not be liable for any non-conformity or damage due to a use of the Poducts with do son to comply with the Specifications issued by either of the Parties or by a third party (professional recommentation, technical notice) -Shell Plaing : Gouger Alloy -Seals & Grommet : Silicon Elastomer -Contact Blaing : Gold over copper Alloy Algo 0.8µm minimum -Durability : 500 Mating cycles -Delivered without Souriau contacts -remperature Range : -65°C to +200°C -Sait Spray : 48 hours -Mass : 13.99 g ± 10% Basic SERIES: 80 5 SouriAct TYPE : Standard Crimp Contact SHELL TYPE: : Standard Crimp Contact SHELL SZE : 11 PLATING : F = Nickel	ds.						
-Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability :: S00 Mating cycles -Delivered without Souriau contacts PN: 8D511F02PCL -Temperature Range : - 65°C to +200°C -Salt Spray : 48 hours -Mass : 13.99 g ± 10% BASIC SERIES: 8D BUS - 11 F 02 P C LTYPE : Plug with RFI Shielding CONTACT TYPE : Standard Crimp Contact SHELL TYPE : Standard Crimp Contact SHELL TYPE : Standard Crimp Contact BHASIC SERIES: 8D Shell TYPE : Standard Crimp Contact ORIENTATION : C CONTACT TYPE SOURIAU WWW.SOURIAU.COM The document is the property of standard Crimp Contact SOURIAU WWW.SOURIAU.COM Thid document is the property of standard Crimp Contact ORIENTATION : C SOURIAU SOURIAU WWW.SOURIAU.COM	-Shell Material : Aluminium Z	31 Max					
Image: Source Range in Source Range range in Source Range in Source Range in S		M15x1-6g					
Seals & Grommet :: Silicon Elastomer - Contact Plating :: Gold over copper Alloy 0.8µm minimum - Ourability :: 500 Mating cycles - Delivered without Souriau contacts - Temperature Range :: -65°C to +200°C - Salt Spray :: : 48 hours - Mass :: 13.99 g ± 10% BASIC SERIES:: BD 5 : 11 F SHELL TYPE :: Plug with RFI Shielding CONTACT TYPE :: Standard Crimp Contact SHELL TYPE :: Standard Crimp Contact SHELL TYPE :: Standard Crimp Contact BHASIC SERIES:: BD 5 : 11 F Delivered W/O Contact ORIENTATION: C CONTACT TYPE :: Standard Crimp Contact BHASIC SERIES:: BD 5 : 11 F Delivered W/O Contact ORIENTATION: C CONTACT TYPE :: Plug with RFI Shielding CONTACT TYPE :: Plug With							
-Contact Plating :: Gold over copper Alloy 0.8µm minimum -Durability :: S00 Mating cycles -Delivered without Souriau contacts -Temperature Range :: 65°C to +200°C -Salt Spray :: 48 hours -Mass :: 13.99 g ± 10% BASIC SERIES: 8D SHELL TYPE : Plug with RFI Shielding CONTACT TYPE : Standard Crimp Contact SHELL TYPE : Standard Crimp Contact SHELL TYPE : Standard Crimp Contact PLATING : F = Nickel				Country	Jurisdiction & Control List]	
- Delivered without Souriau contacts - Temperature Range : -65°C to +200°C - Salt Spray : 48 hours - Mass : 13.99 g ± 10% BASIC SERIES: 8D 5 11 F 02 P C L SHELL TYPE : Standard Crimp Contact SHELL SIZE : 11 PLATING : F = Nickel PN: 8D511F02PCL A 15-10-2016 First Release ISS DATE Latest modification - by MOD N° Designed By: Date: CUSTOMER DRAWING Designed By: Date: CUSTOMER DRAWING SHELL SIZE : 11 PLATING : F = Nickel CONTACT TYPE : Plugowith RFI Shielding PLATING : F = Nickel CONTACT TYPE : Plugowith RFI Shielding PLATING : F = Nickel CONTACT TYPE : Plugowith RFI Shielding PLATING : F = Nickel CONTACT TYPE : Plugowith RFI Shielding PLATING : F = Nickel CONTACT TYPE : Plugowith RFI Shielding CONTACT TYPE : Plugowith RFI Shielding CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 11 PLATING : F = Nickel CONTACT TYPE : Plugowith RFI Shielding CONTACT TYPE : Plugowith RFI Shielding CONTACT TYPE : Standard Crimp Contact SOURIAU WWW.SOURIAU.COM This document is the property of SOURIAU CONTACT TYPE : Plugowith RFI Shielding CONTACT TYPE : Standard Crimp Contact SOURIAU WWW.SOURIAU.COM This document is the property of SOURIAU CONTACT TYPE : Plugowith RFI Shielding CONTACT TYPE : Plugowith RFI						_	
-Temperature Range : -65°C to +200°C -Salt Spray : 48 hours -Mass : 13.99 g ± 10% BASIC SERIES: 8D 5 11 F 02 P C L SHELL TYPE : Plug with RFI Shielding CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 11 PLATING : F = Nickel PLATING : F = Nickel CONTACT TYPE : Plug with RFI Shielding PLATING : F = Nickel CONTACT TYPE : Plug with RFI Shielding PLATING : F = Nickel CONTACT TYPE : Plug with RFI Shielding PLATING : F = Nickel CONTACT TYPE : Plug with RFI Shielding PLATING : F = Nickel CONTACT TYPE : Plug with RFI Shielding PLATING : F = Nickel CONTACT TYPE : Plug with RFI Shielding PLATING : F = Nickel CONTACT TYPE : Plug with RFI Shielding PLATING : F = Nickel CONTACT TYPE : Plug with RFI Shielding CONTACT TYPE : Plug with RFI Shield	-Durability : 500 Mating cycles	Durability : 500 Mating cycles					
-Salt Spray : 48 hours -Mass : 13.99 g ± 10% A 15-10-2016 First Release ISS DATE Latest modification - by MOD N° Designed By: Date: CUSTOMER DRAWING Designed By: Date: CUSTOMER DRAWING Designed By: Date: CUSTOMER DRAWING ITTLE Aluminium Plug 8D series SCALE General linear Tolerances: 859 ±	-Delivered without Souriau contacts			PIN: 80511F02	LACT THE THE THE THE THE THE THE THE THE TH		ľ
-Salt Spray : 48 hours -Mass : 13.99 g ± 10% BASIC SERIES: 8D 5 - 11 F 02 P C L SHELL TYPE : Plug with RFI Shielding CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 11 PLATING : F = Nickel CONTACT TYPE : Plug with RFI Shielding CONTACT TYPE : Na Contact Layout : 11-02 CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 11 CONTACT TYPE : Plug with RFI Shielding CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 11 CONTACT TYPE : Plug with RFI Shielding CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 11 CONTACT TYPE : Plug with RFI Shielding CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 11 CONTACT TYPE : Plug with RFI Shielding CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 11 CONTACT TYPE : Plug with RFI Shielding CONTACT TYPE : Plug with RFI Shielding CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 11 CONTACT TYPE : Plug with RFI Shielding CONTACT TYPE : Plug with RFI Shielding CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 11 CONTACT TYPE : Plug with RFI Shielding CONTACT TYPE : Plug with RFI Shielding CONTACT TYPE : Plug with RFI Shielding CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 11 CONTACT TYPE : Plug with RFI Shielding CONTACT TYPE : Plug with RFI Shielding CONTACT TYPE : Plug with RFI Shielding CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 11 CONTACT TYPE : Plug with RFI Shielding CONTACT TYPE : Standard Crimp Contact SUB CONTACT TYPE : Plug with RFI Shielding CONTACT TYPE : Pl	-Temperature Range65°C to +200°C	Λ	15-10-2016 First Release				
Designed By: Date: CUSTOMER DRAWING Designed By: Date: CUSTOMER DRAWING BASIC SERIES: 8D 5 - 11 F 02 P C L SHELL TYPE : Plug with RFI Shielding							
BASIC SERIES: 8D 5 - 11 F 02 P C L SHELL TYPE Plug with RFI Shielding Delivered W/O Contacts Delivered W/O Contacts NA Image: Contact Signature SCALE NA SCALE State State <t< td=""><td>-Mass : 13.99 g ± 10%</td><td></td><td></td><td></td><td>CUSTOMER DRAWING</td><td></td><td></td></t<>	-Mass : 13.99 g ± 10%				CUSTOMER DRAWING		
BASIC SERIES: 8D 5 - 11 F 02 P C L SHELL TYPE Plug with RFI Shielding Delivered W/O Contacts Delivered W/O Contacts NA Image: Contact Signature SCALE NA SCALE State State <t< td=""><td></td><td></td><td colspan="2">TITLE Aluminium Plug 8D series</td><td></td><td></td></t<>			TITLE Aluminium Plug 8D series				
Desice strutts: BD S II I OZ P C I				Constant lines			
SHELL TYPE 1: Plug with RFT shielding Delivered W/O contacts NA Image: Second se			-{ - (⊕)	Tolerances:			
CONTACT TYPE : Standard Crimp Contact ORIENTATION : C SHELL SIZE : 11 CONTACT TYPE : PIN(500 Matings) PLATING : F = Nickel CONTACT LAYOUT : 11-02 FORMAT SOURIAU SHELL SIZE : 11 SOURIAU PLATING : F = Nickel CONTACT LAYOUT : 11-02 FORMAT SOURIAU SHELL SIZE : 11 SOURIAU	SHELL TYPE : Plug with RFI Shielding			±		operty of	
SHELL SIZE : 11 CONTACT TYPE : PIN(500 Matings) communicated without permission PLATING : F = Nickel CONTACT LAYOUT : 11-02 FORMAT SOURIAU DRG N° SHEET	CONTACT TYPE : Standard Crimp Contact	ORIENTATION : C SO		WW.SOURIAU.COM	SOURIAU		
	SHELL SIZE : 11 CONTAC				it mast not be reprova		
A3 8D511F02PCL-C 1/2	PLATING : F = Nickel	CONTACT LATOOT . 11-02		SOURIAU D	RG N°	SHEET	
		A	43	8D511F02F	PCL-C	1/2	

r	Ŧ	ര	т	m	D	0	
		Contact Layout					
4	. x. .0 (2.	+Y IB IA + + + + + + + + + + + + +					
	Cont positi ID A B Shell Arrangement no. 11 -2	X-axis Y-axis (mm) (mm) + .095 (2.41) +.000 (.00) 095 (2.41) +.000 (.00)					
ယ							
	-					SOURIAU shall not be liable fo due to a use of the Product the Specifications issued by eith (professional recomme	ts w her (
N						PN: 8D51	FR
					A 15-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:	
					TITLE SCALE NA	Alur General line Tolerances ±	ear
					SOURIA	U WWW.SOURIAU	J.(
					FORMAT A3	SOURIA 8D511	۹L
L	Н	G	F	E	D	С	

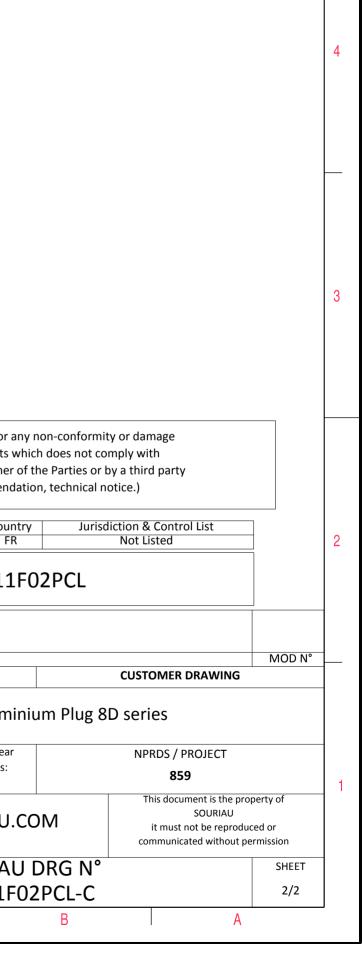

ω