
	ш	m		D	0			
	ØS							
	I	I			LAY	YOUT SHOWN AS EXAMPLE		
	Keying Shown a	as example						
CHARACTERISTICS -Standard : Based on MIL-DTL-38999 Series III -Shell Material : Composite -Shell Plating : Olive drab Cadmium -Insulator : Thermoplastic -Contacts : Copper Alloy		Connector dimensionDimNominalØS35.7 MaxZ'31.5 MaxVV THREADM25x1-6g			due to a use the Specifications	not be liable for any non-cor of the Products which does issued by either of the Part onal recommendation, tech	not comply with ies or by a third party	
-Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8µm minimum						Country FR	Jurisdiction & Control List Not Listed	
-Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories					F	PN: 8D517J06SE		
-Temperature Range : -65°C to +175°C				A 14-10	0-2016 First Release			
-Salt Spray : 2000 hours - Mass : 35.5 g ± 10%				ISS D/ Designed By:	ATE Latest modificatio Date:	on - by	CUSTOMER DRAWING	MOD N°
				TITLI	E	Composite Pl	ug 8D series	
BASIC SERIES: 8D 5 - 17 J SHELL TYPE : Plug with RFI Shielding - 17 J	06 S D			SCALE NA		General linear Tolerances: ±	NPRDS / PROJECT 859 This document is the p	opertu of
CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 17		OI CONTACT TYPE : SOCKE	RIENTATION : D	SOUR	IAU WWW	.SOURIAU.COM	SOURIAU it must not be reproc	uced or
PLATING : J = Olive drab Cadmium			LAYOUT : 17-06	FORMAT A3		SOURIAU DRG	N°	SHEET 1/2
				,		8D517J06SD-	·L	1/2

	Ξ		Q		ш	п	1	D		0	
		Contac	ct Layout								
4		-x (D + F	$ \begin{array}{c} \bullet \\ A \\ \oplus \\ \oplus \\ \end{array} \\ \end{array} \\ \begin{array}{c} \bullet \\ \bullet $								
		G	€Y ntacts ngement 17-6) Location								
ى		position ID X-a (m A +.121 B +.241 C +.000 D241	xis Y-axis (mm) (3.07) + 209 (5.31) (6.12) + .000 (0.00) (0.00) - 241 (6.12) (6.12) + .000 (0.00) (3.07) + .209 (5.31)								
	Sheli Arra size 17	no. contacts co	ntacts rating location	persedes i20053-6							
										the Specifications i	of the Products w
2										D	Count FR PN: 8D517
									A 14-10-20: SS DATE signed By:	L6 First Release Latest modification Date:	
									TITLE		Compo General linear Tolerances:
<u> </u>								S		J www.	souriau.c
									FORMAT A3		SOURIAU 8D517J
	Н		G		F	E		D		С	

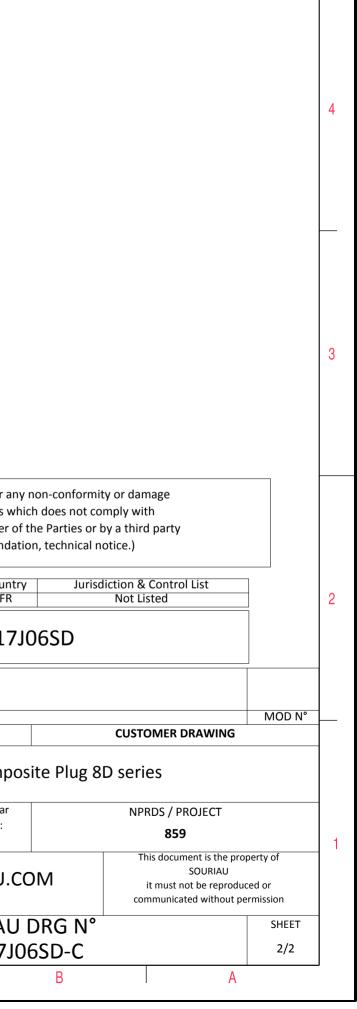

 \triangleright

σ