


**SHIELDED**

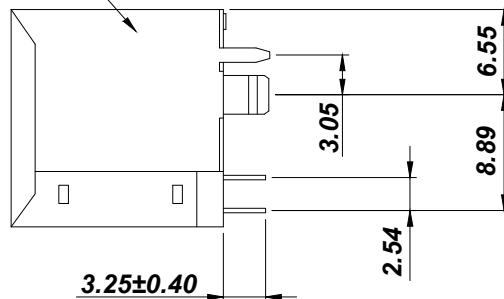

**NOTES:**

**MATERIAL**

- 1.Housing : PBT Glass Filled,UL94V-0,Black
- 2.Spring Wire: Phosphor Bronze,Ø=0.35mm ,
- ① Selective plating: 6u" Gold on mating contact, Sn on soldering contact
- 3.Shielded: Brass plating Ni


**ELECTRICAL**

- 1.Current Rating : 1.5A Max
- 2.Rating Voltage : 120V AC
- 3.Contact Resistance : 20mΩ max
- 4.Insulation Resistance: 500MΩ min
- 5.Dielectric Voltage : 1000V RMS 60Sec. Min.


**ENVIRONMENTAL**

- 1.Temperature Range: -40°C to +85°C
- 2.Durability: 500 cycles Min
- 3.Soldering Temperature: +235°C

Package: Tray

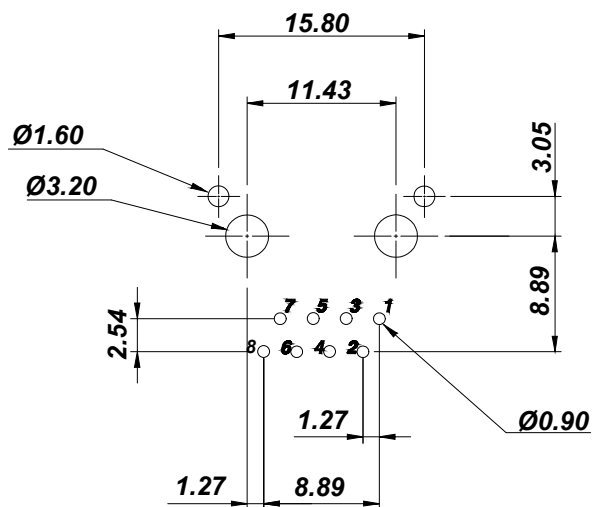

PCB Layout  
(Top View)

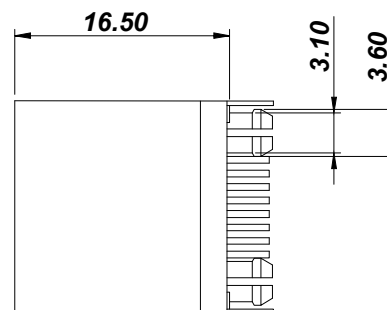

**RoHS compliant**

Unit:mm

Scale	Free
TOLERANCE	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
DIM	TOL
X.°	± 3°
Angle	TOL

①	Update	26.10.2020	Daniel
②	Drawn	22.12.2011	Chappell
Id.	Modification	Date	Name



Description:		Modular,RJ45,1.27mm,8pin THT,180°,Au6u"/Sn,tray	
ASSMANN WSW-No.		A-2014-2S-4-N-R	
Drawing-No.		ASS 7330 CO	rev01
Customer-No.		SHEET 1 / 1	