


DATE	REV	ECN	APP'D. BY
5/29/19	A0	RELEASED	-
10/15/20	A1	11639	JE

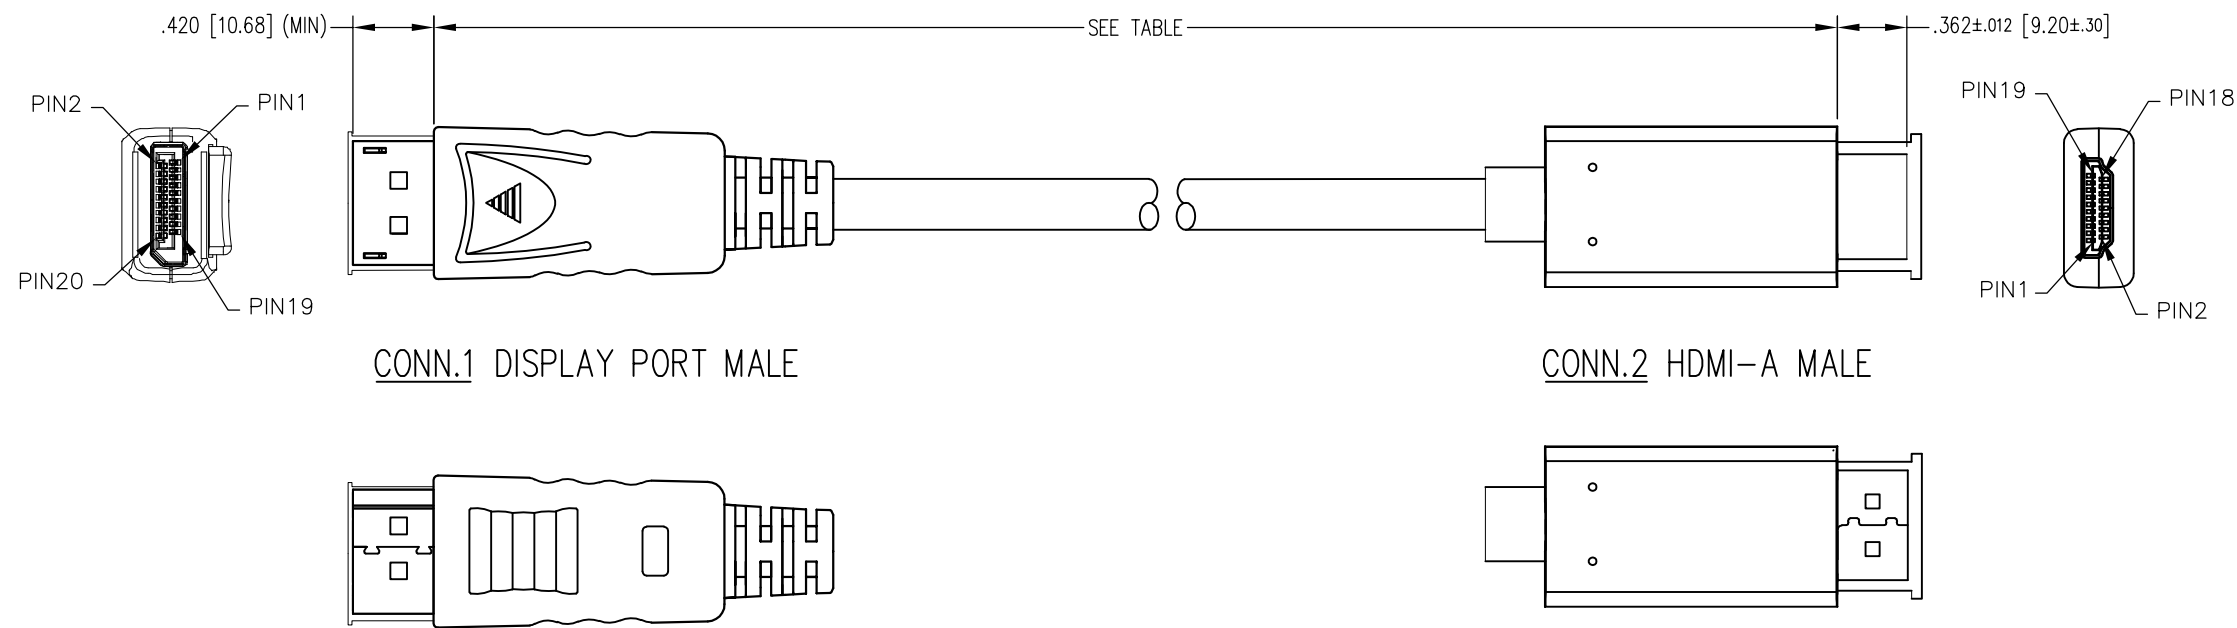


CONN.1 DISPLAY PORT MALE



CONN.2 HDMI-A MALE

NOTES:

- SUPPORTS DISPLAYPORT 1.2a INPUT AND HDMI 1.4b OUTPUT.
- CONNECTOR COMPONENTS:
 TRANSPARENT DUST COVER
 INSIDE MOLDING: PE
 STRAIN RELIEF MOLDING: 45P PVC, BLACK
 OUTSIDE MOLDING:
 DISPLAY PORT: ABS, BLACK
 HDMI-A: 45P PVC, BLACK
 SHELL PLATING: GOLD FLASH
 CONTACT: GOLD PLATING
 DISPLAY PORT CABLE UL20276 (7/0.127TA*PR+EAM)
 *5+7/0.127TA*5C+AEB 85% OD:.29 [7.3] BLACK
- ELECTRICAL TESTING:
 100% OPEN & SHORT & CONTINUITY WIRE TEST
 CONTACT RESISTANCE: 6 OHM(MAX)
 INSULATION RESISTANCE: 10M OHM(MIN)
 HI-POT TEST: DC 100V/10ms
- PACKAGING
 ONE CABLE PER BAG

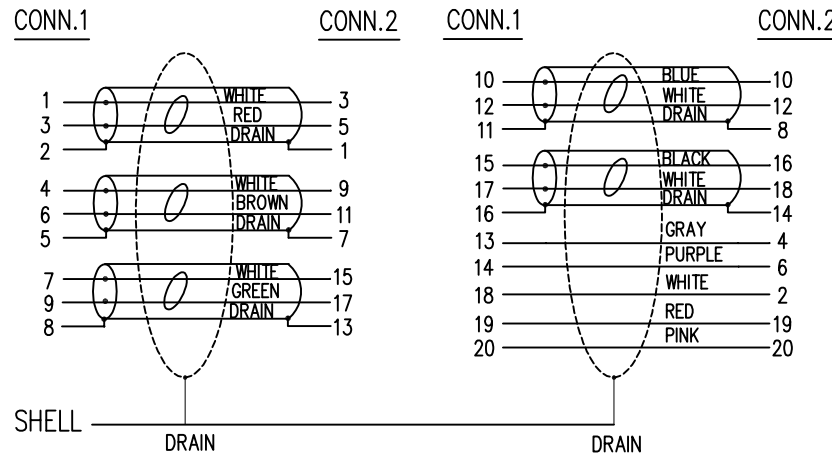

P/N	LENGTH
BC-DH003F	36±1.2 [915±30]
BC-DH006F	72±1.2 [1830±30]
BC-DH010F	120±1.6 [3050±40]



THIRD ANGLE PROJECTION	
DO NOT SCALE DRAWING DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE	
DIMENSIONS: INCHES [METRIC]	
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ±.005 [0.13] ANGLES ARE ± 1°	
SHEET NO. 1 OF 1	

	206 Van Vorst Street Jersey City, NJ 07302 +1 201 432 0463 http://www.belfuse.com	
	TITLE: DISPLAY PORT MALE TO HDMI-A MALE CABLE	
DRN BY: JMM	DATE: 05/16/19	
APPD BY: ADB	DATE: 05/29/19	
DWG NO. CT999192	REV. A1	

ASSEMBLY FORMAT REV. 6/3/05

B

B

A

A